Image filtering

http://16385.courses.cs.cmu.edu/

16-385 Computer Vision
Spring 2021, Lecture 2

Overview of today’s lecture

- Types of image transformations.
- Point image processing.
- Linear shift-invariant image filtering.
- Convolution.
- Image gradients.

Slide credits

Most of these slides were adapted directly from:

- Kris Kitani (15-463, Fall 2016).

Inspiration and some examples also came from:

- Fredo Durand (Digital and Computational Photography, MIT).
- Kayvon Fatahalian (15-769, Fall 2016).

Types of image transformations

What is an image?

What is an image?

A (color) image
is a 3D tensor
of numbers.

What is an image?

red green blue

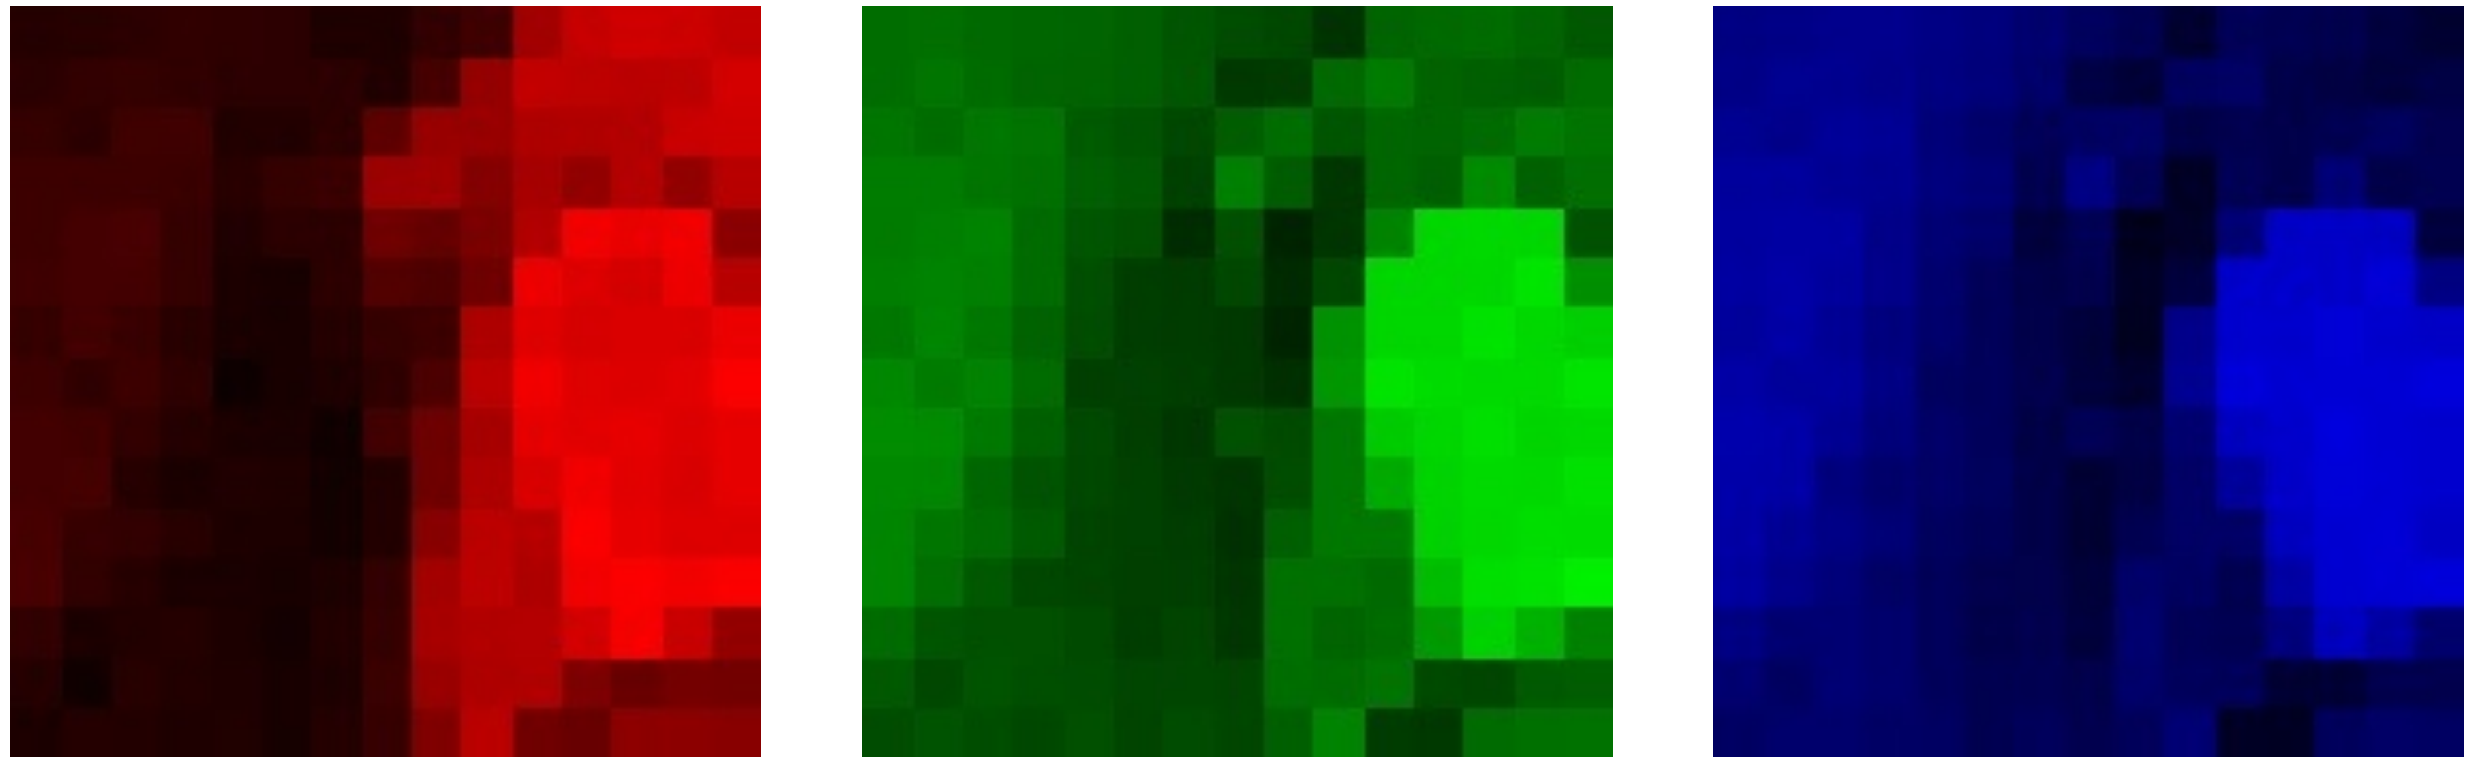

colorized for visualization

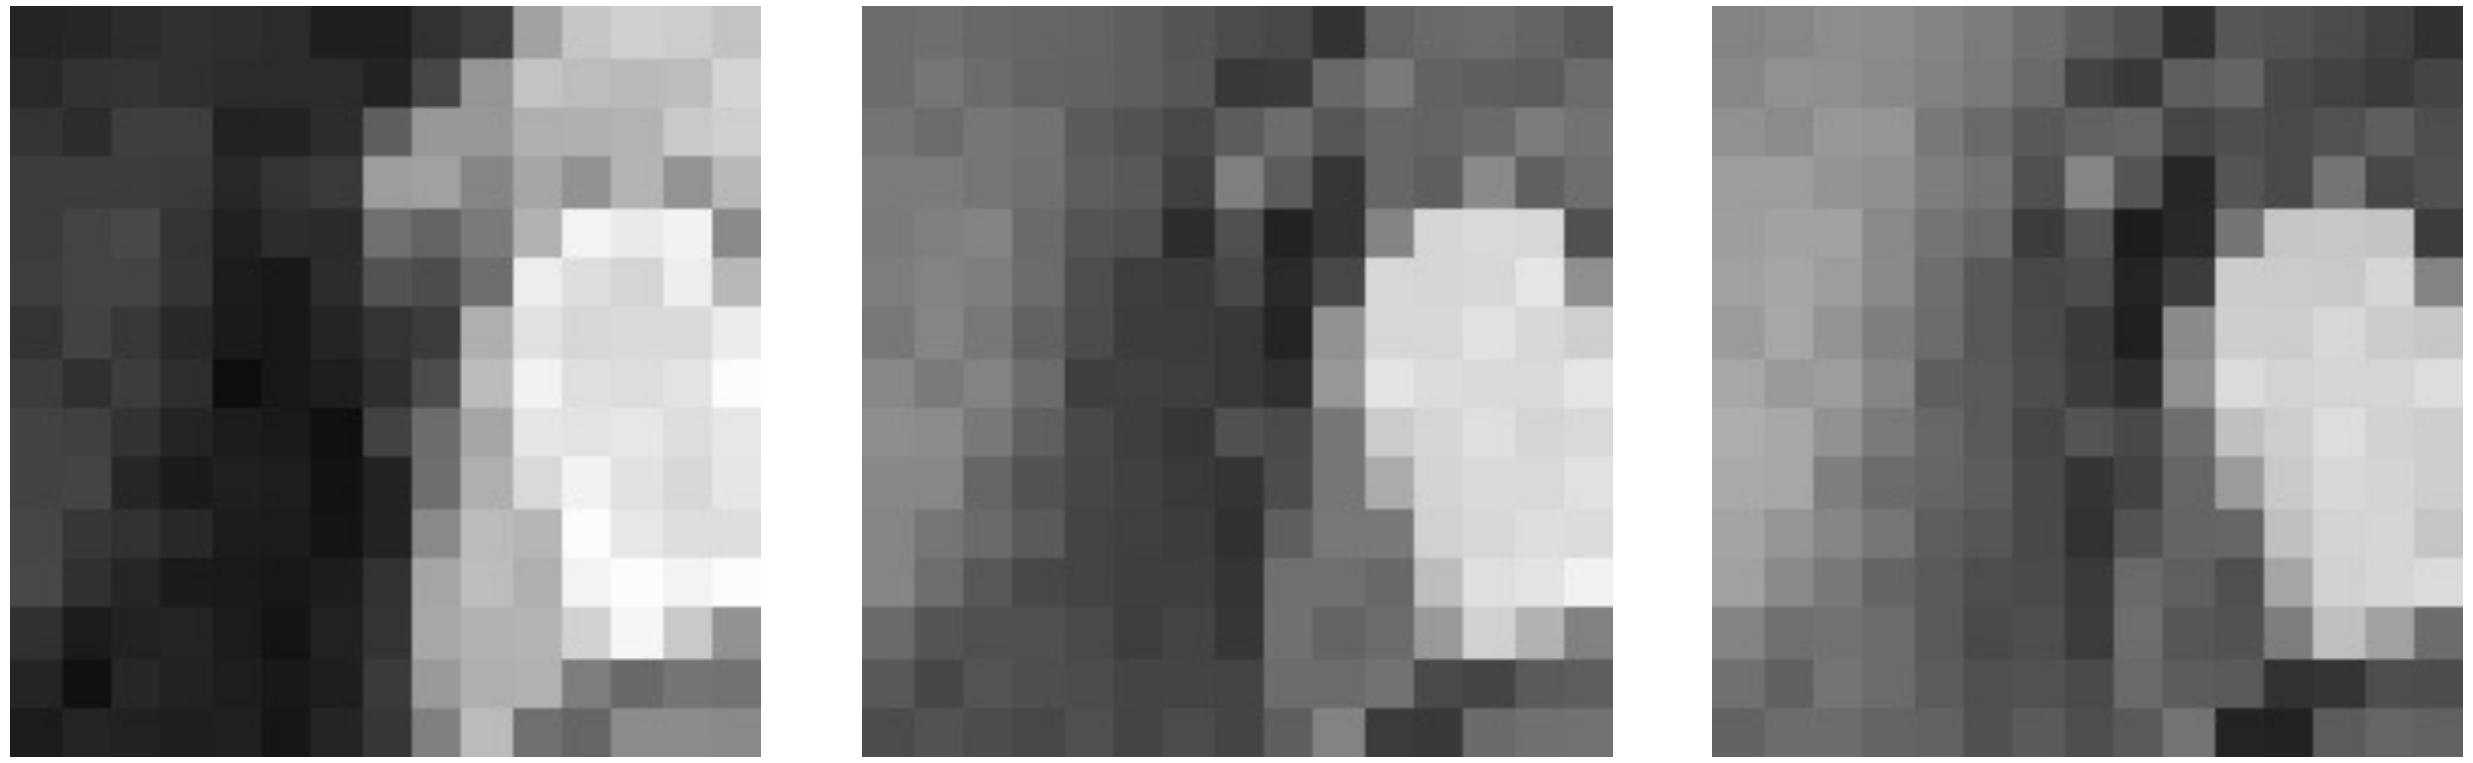

actual intensity values per channel

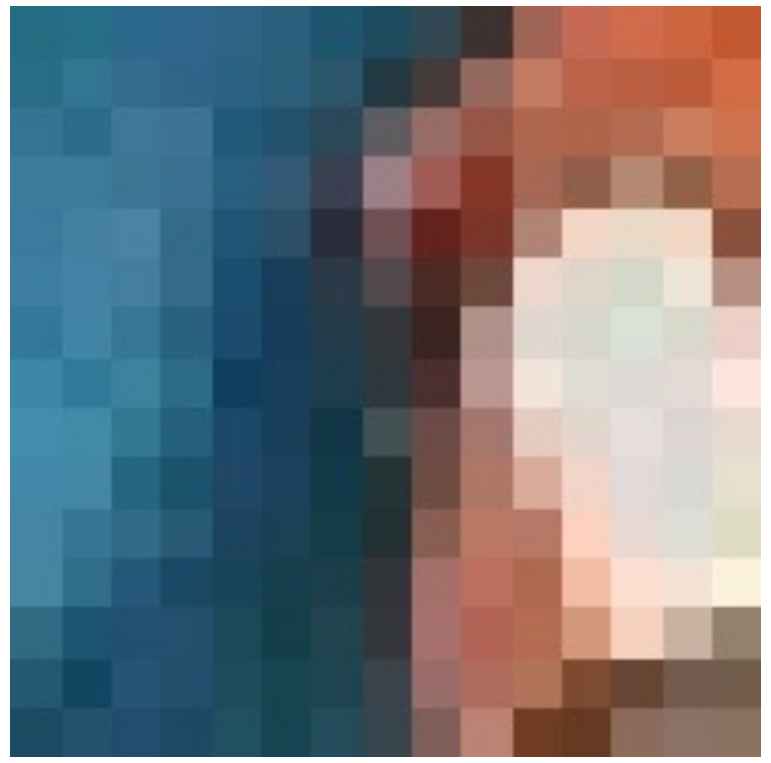

color image patch

How many bits are the intensity values?

Each channel is a 2D array of numbers.

What is an image?

grayscale image

What is the range of the image function f?

$f(\boldsymbol{x})$

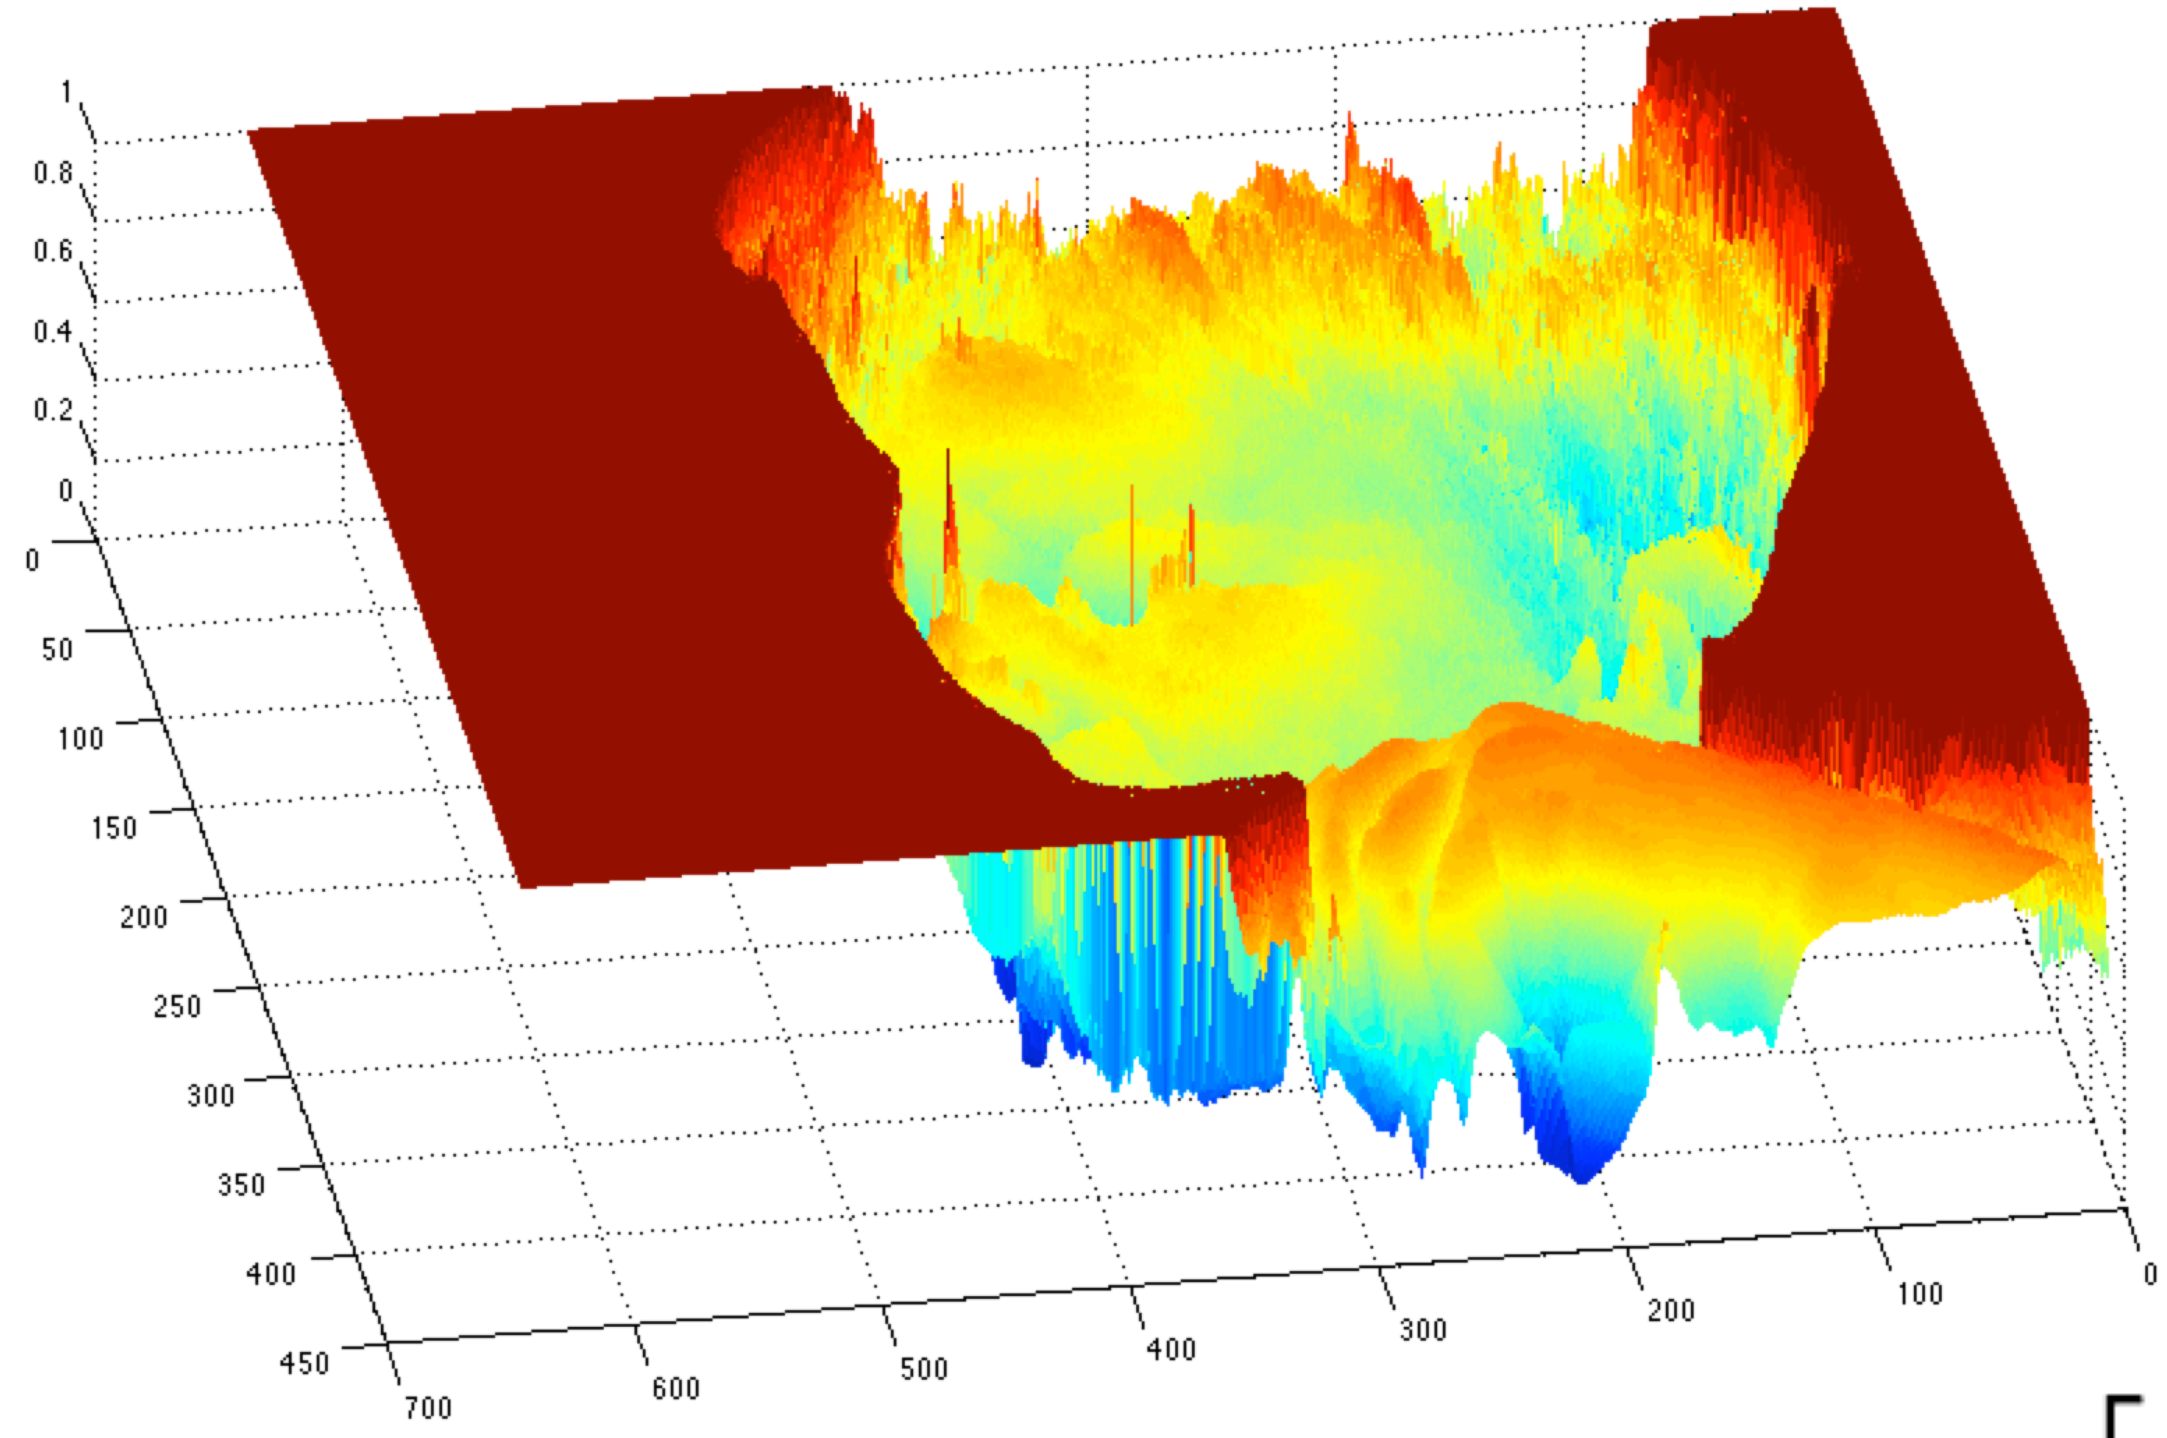

domain $\boldsymbol{x} = \begin{bmatrix} x \\ y \end{bmatrix}$

A (grayscale) image is a 2D function.

What types of image transformations can we do?

Filtering

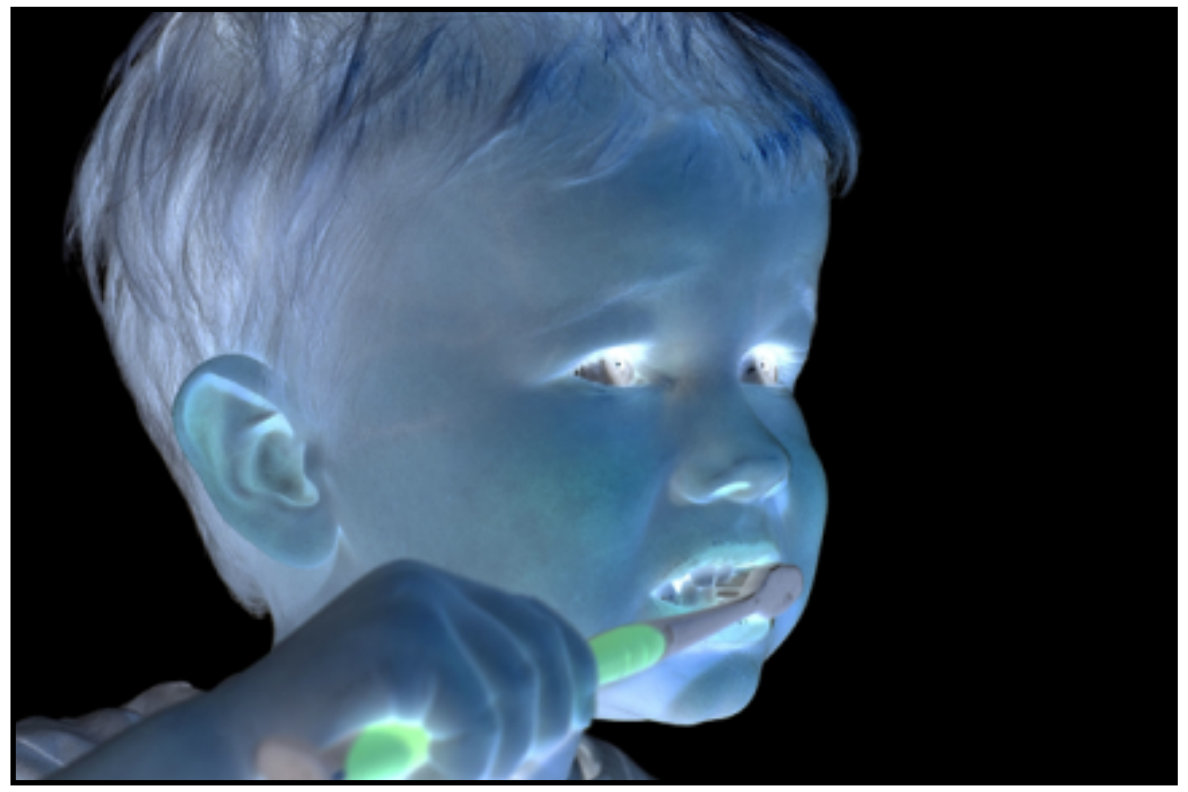

changes pixel *values*

Warping

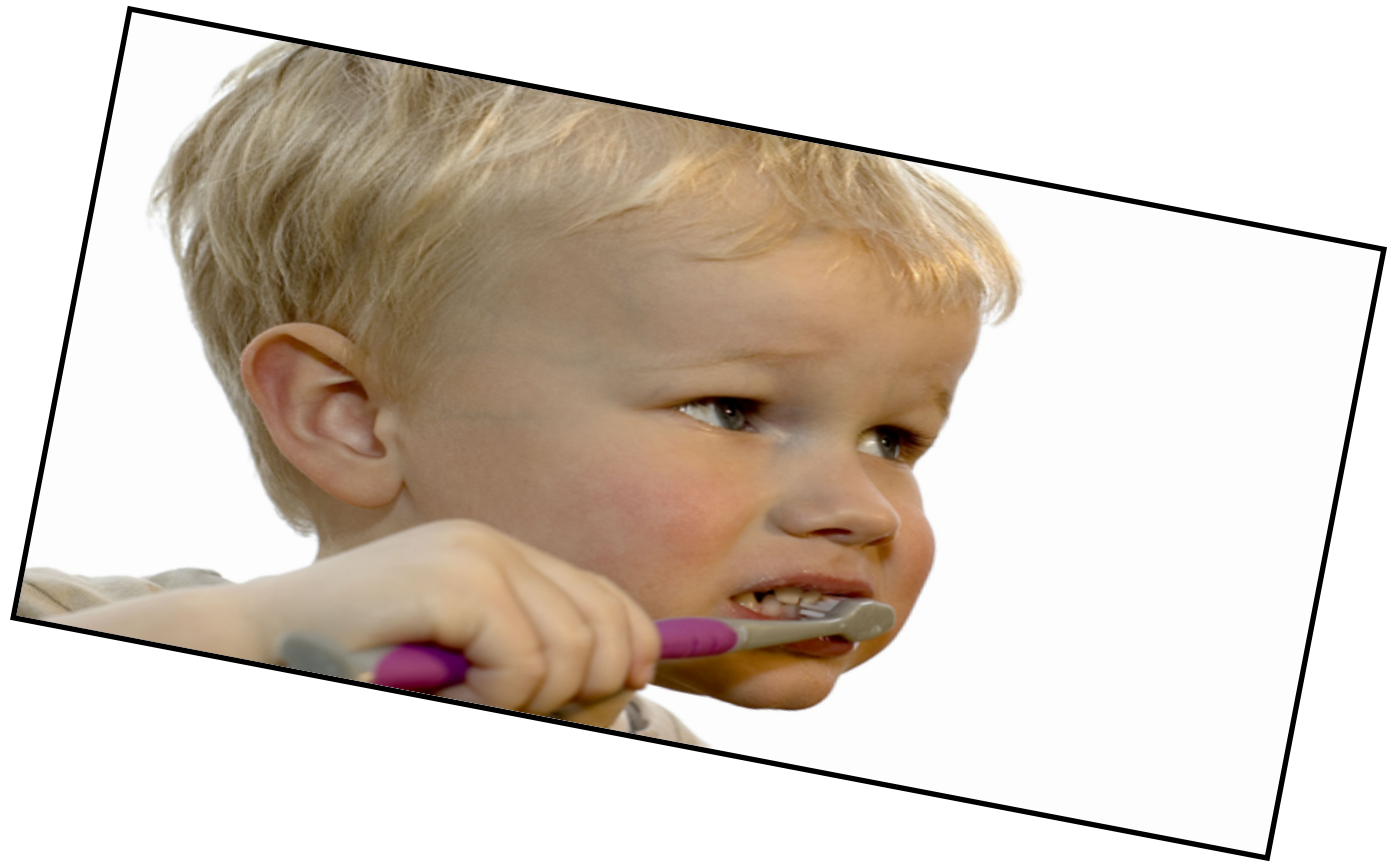

changes pixel *locations*

What types of image transformations can we do?

F

Filtering

$$G(\boldsymbol{x}) = h\{F(\boldsymbol{x})\}$$

G

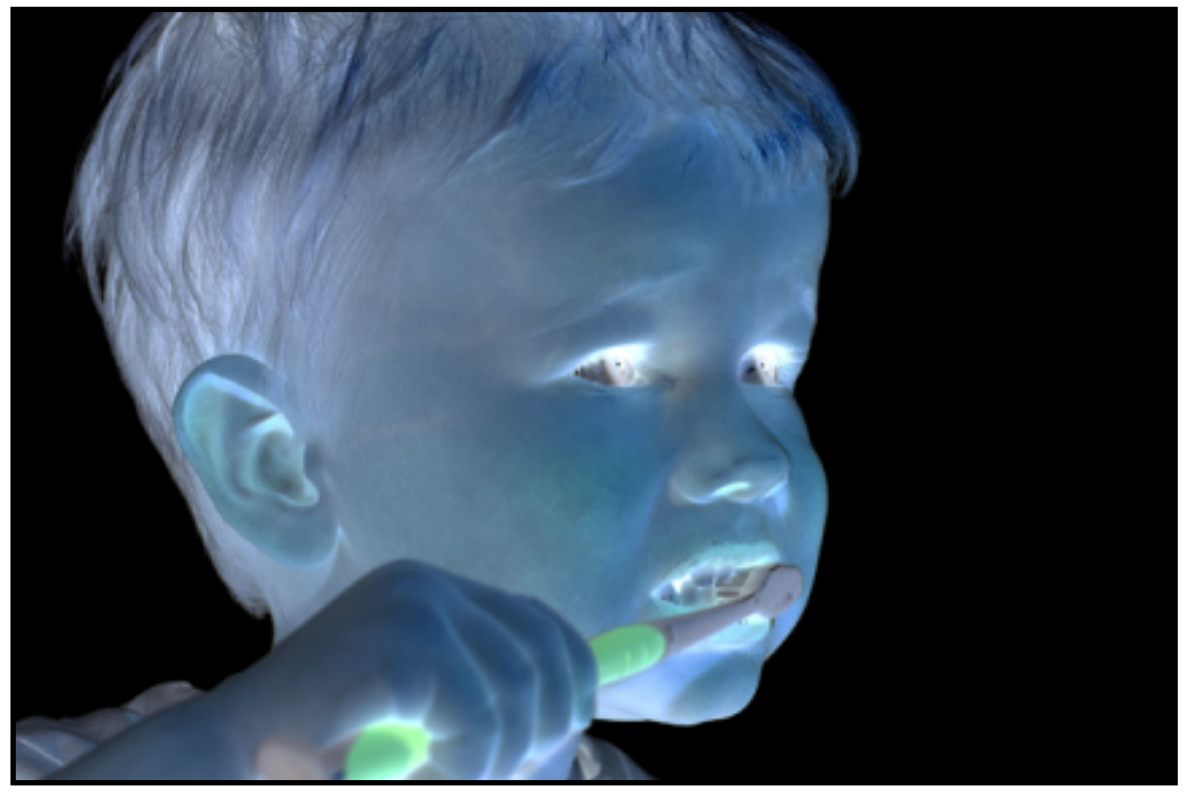

changes *range* of image function

F

Warping

$$G(\boldsymbol{x}) = F(h\{\boldsymbol{x}\})$$

G

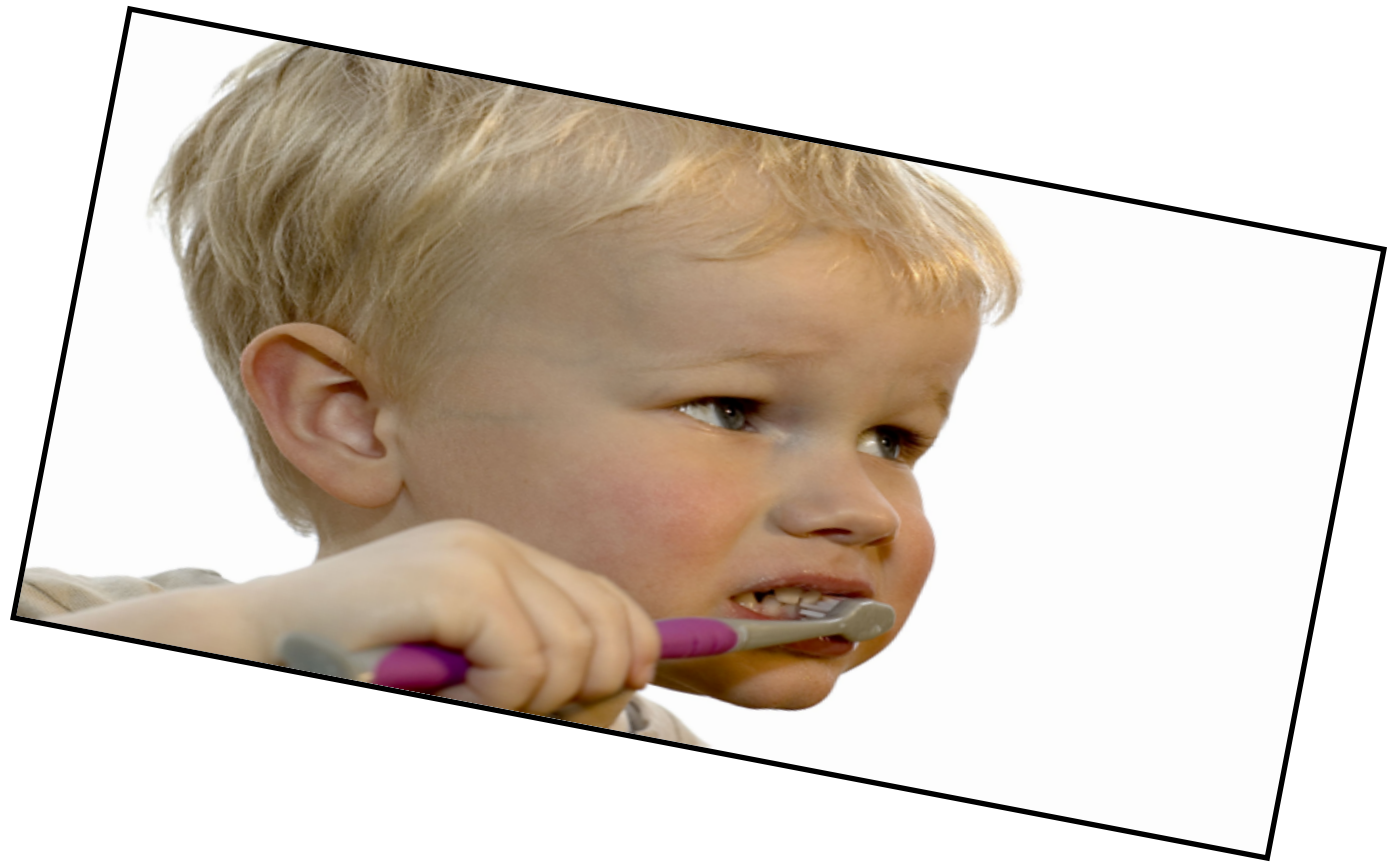

changes *domain* of image function

What types of image filtering can we do?

Point Operation

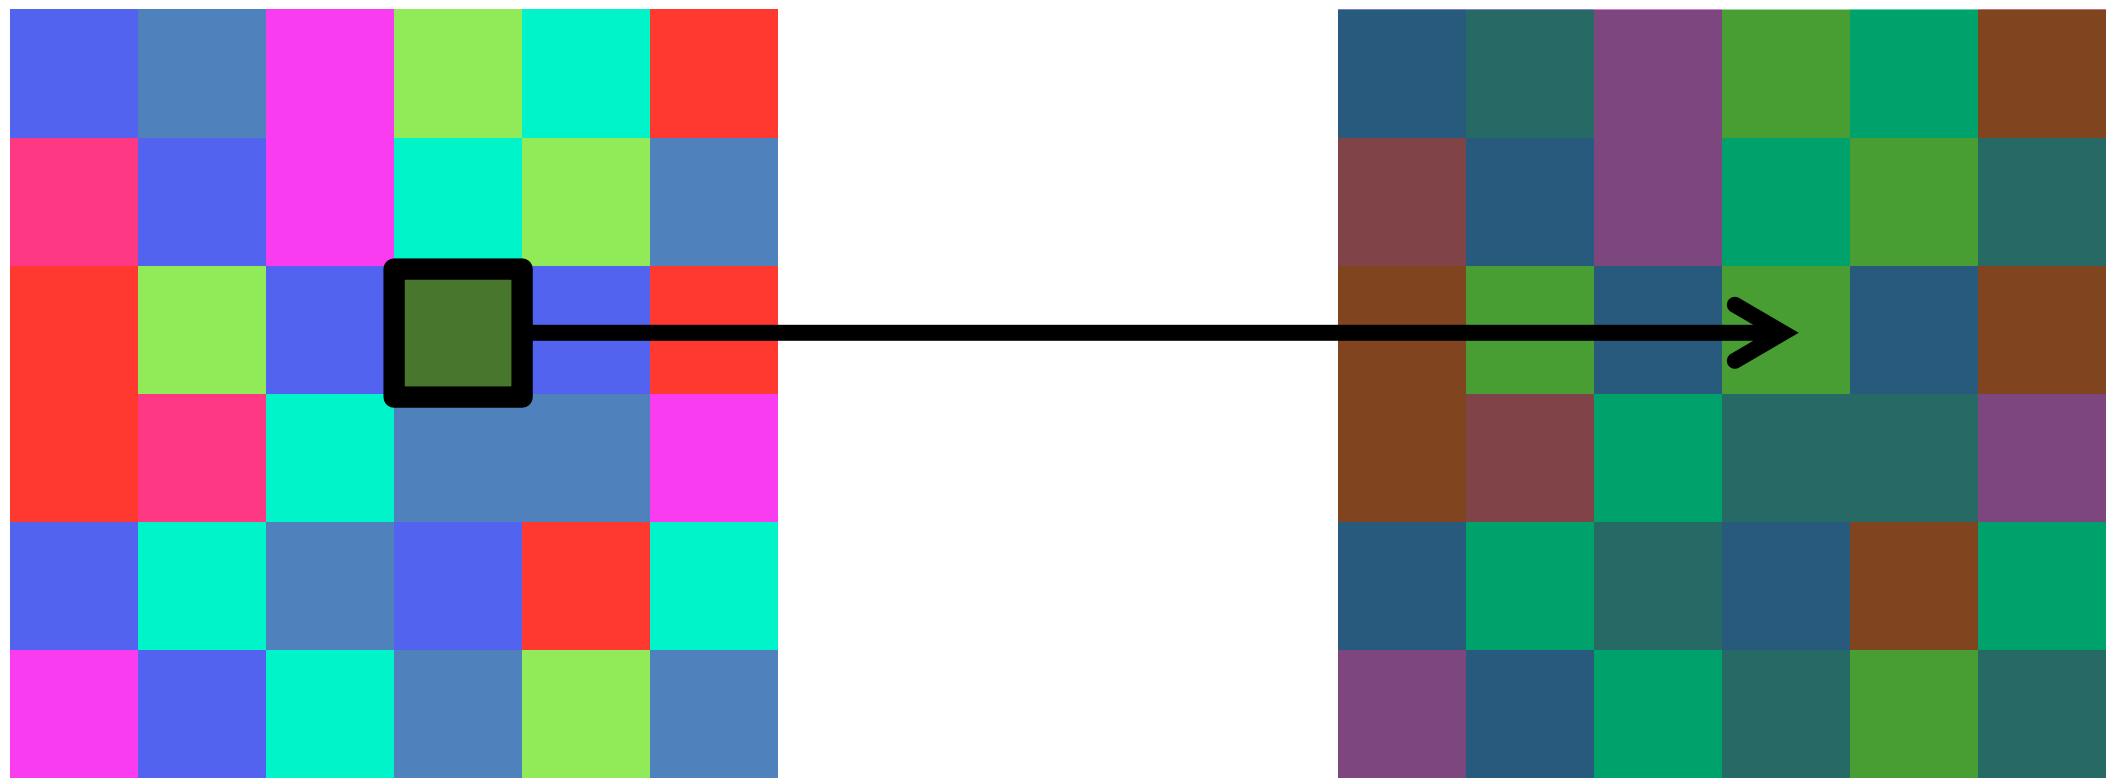

point processing

Neighborhood Operation

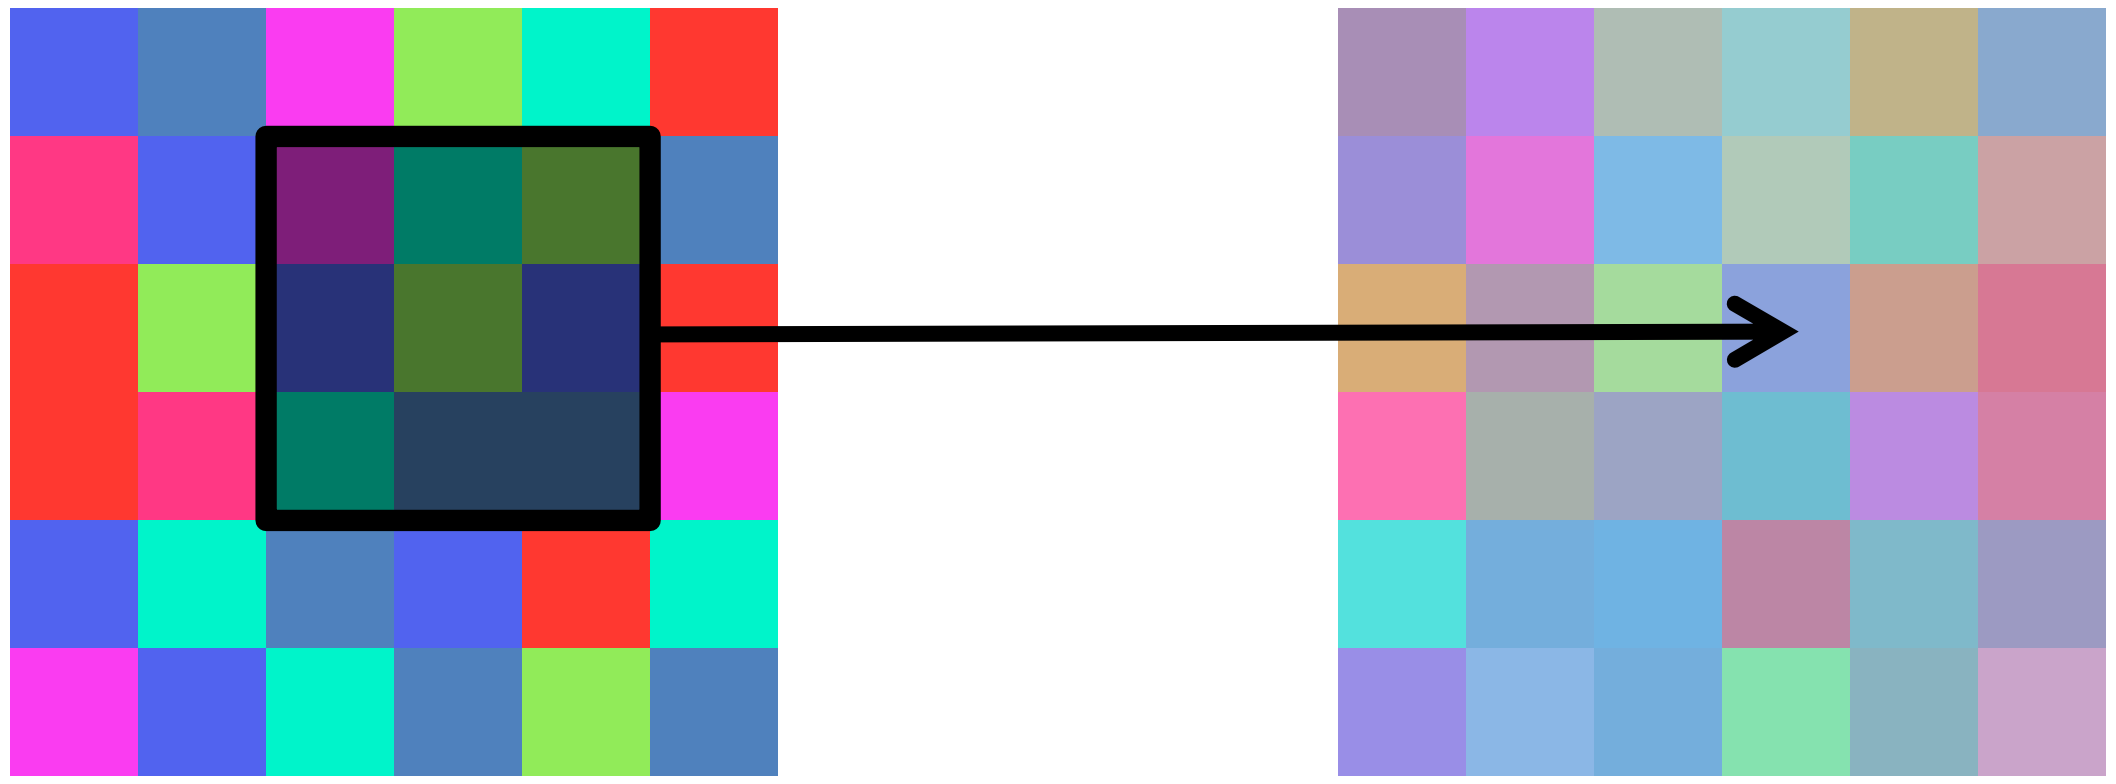

“filtering”

Point processing

Examples of point processing

original

darken

lower contrast

non-linear lower contrast

invert

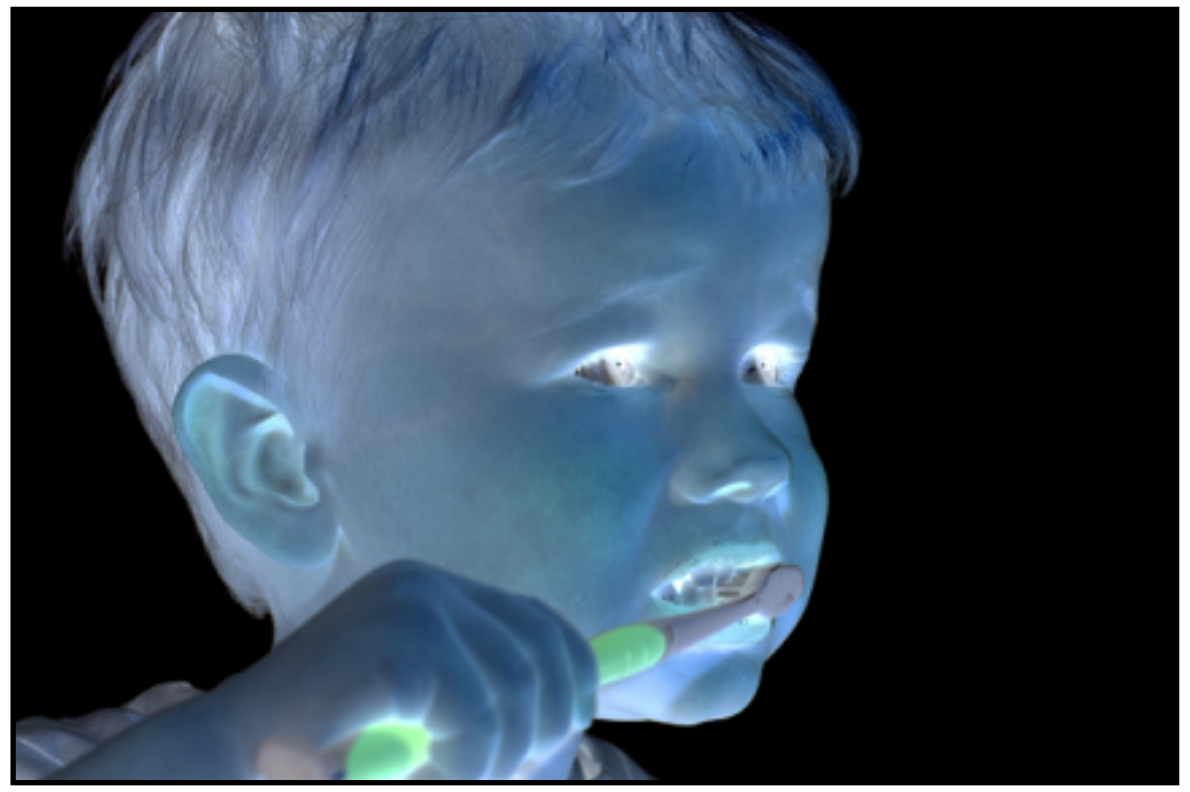

lighten

raise contrast

non-linear raise contrast

Examples of point processing

How would you implement these?

original

x

darken

lower contrast

non-linear lower contrast

invert

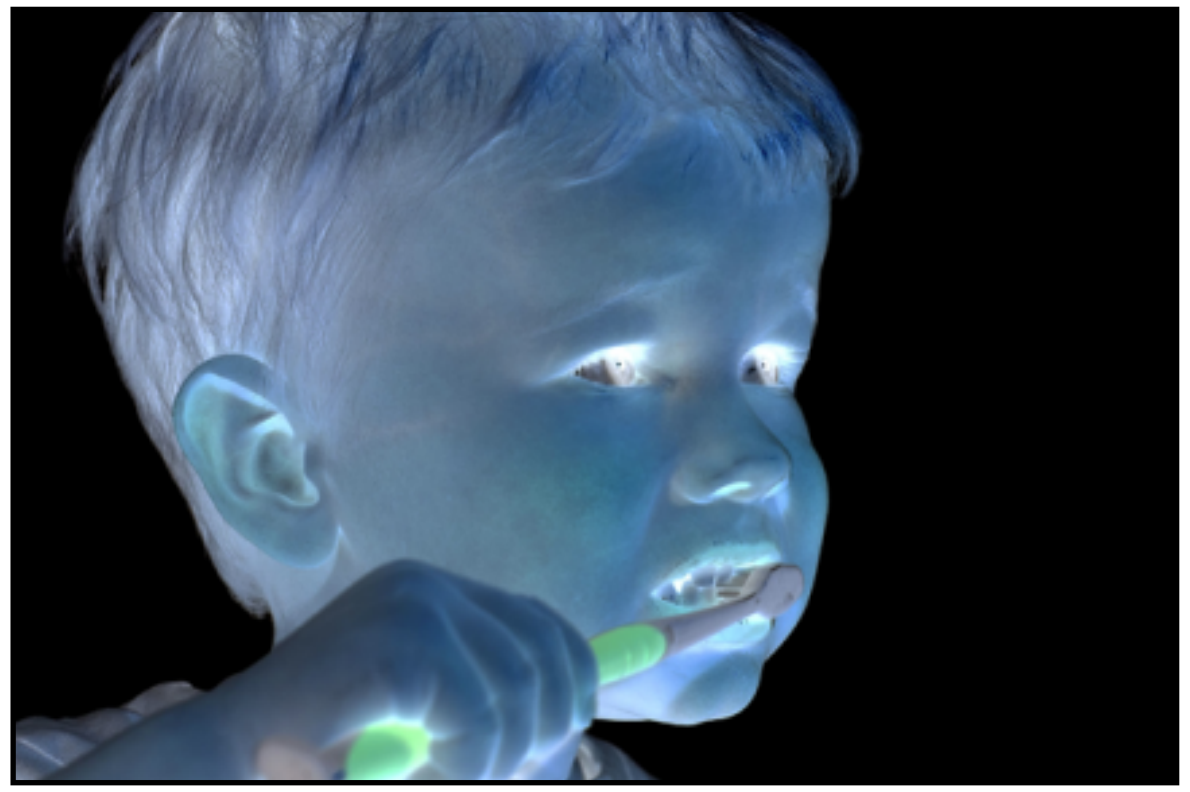

lighten

raise contrast

non-linear raise contrast

How would you implement these?

Examples of point processing

original

x

darken

$x - 128$

lower contrast

non-linear lower contrast

invert

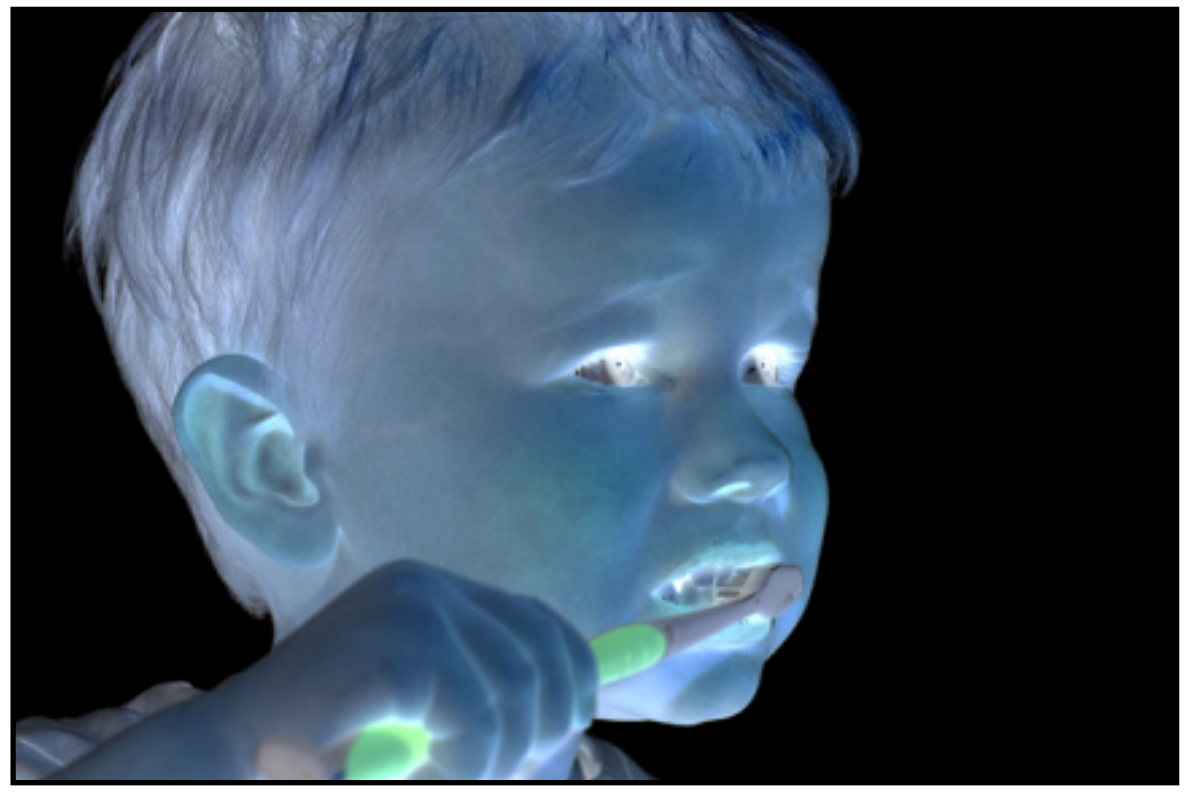

lighten

raise contrast

non-linear raise contrast

How would you implement these?

Examples of point processing

original

x

darken

$x - 128$

lower contrast

$\frac{x}{2}$

non-linear lower contrast

invert

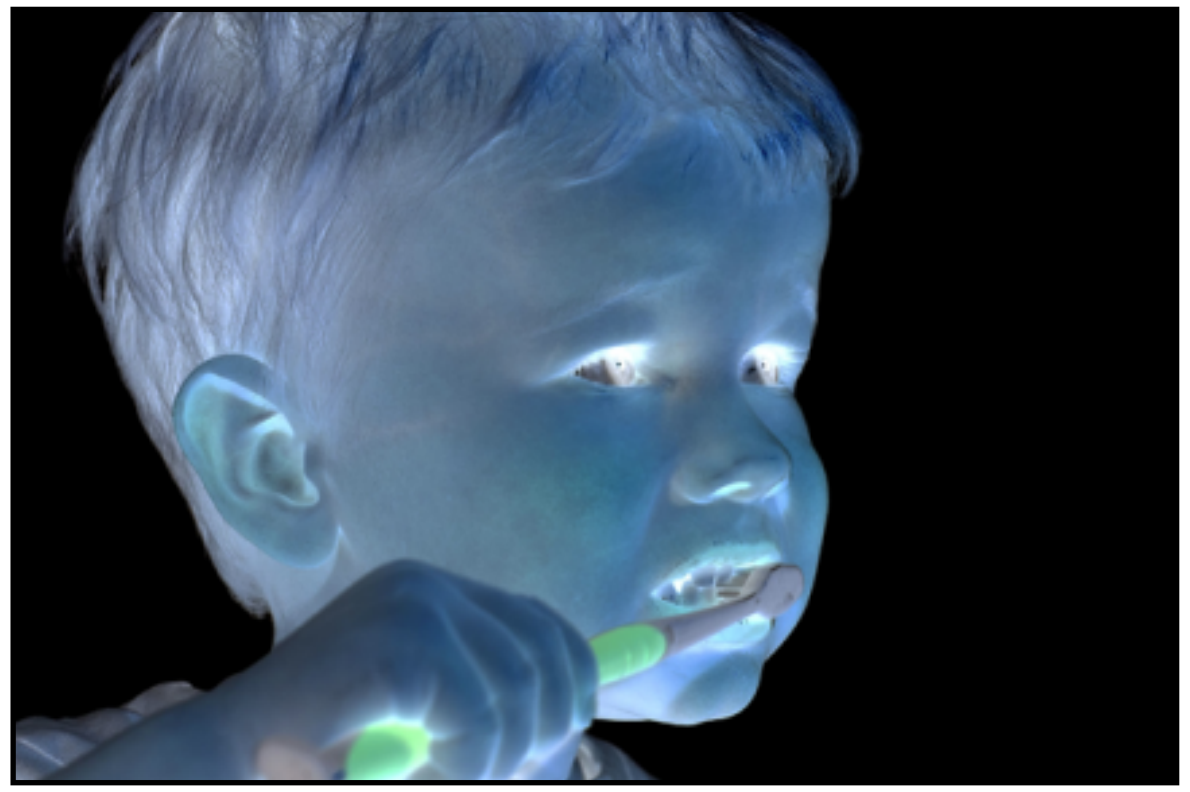

lighten

raise contrast

non-linear raise contrast

How would you implement these?

Examples of point processing

original

$$x$$

darken

$$x - 128$$

lower contrast

$$\frac{x}{2}$$

non-linear lower contrast

$$\left(\frac{x}{255}\right)^{1/3} \times 255$$

invert

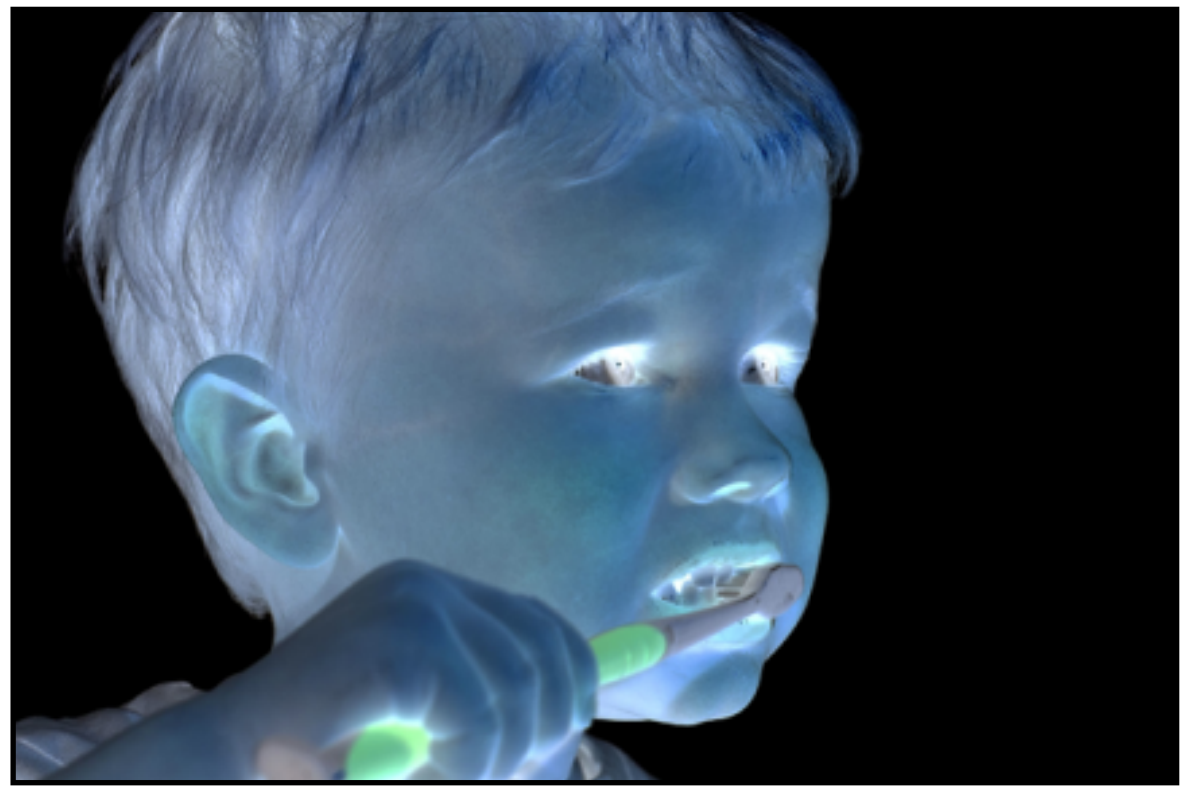

lighten

raise contrast

non-linear raise contrast

How would you implement these?

Examples of point processing

original

$$x$$

darken

$$x - 128$$

lower contrast

$$\frac{x}{2}$$

non-linear lower contrast

$$\left(\frac{x}{255}\right)^{1/3} \times 255$$

invert

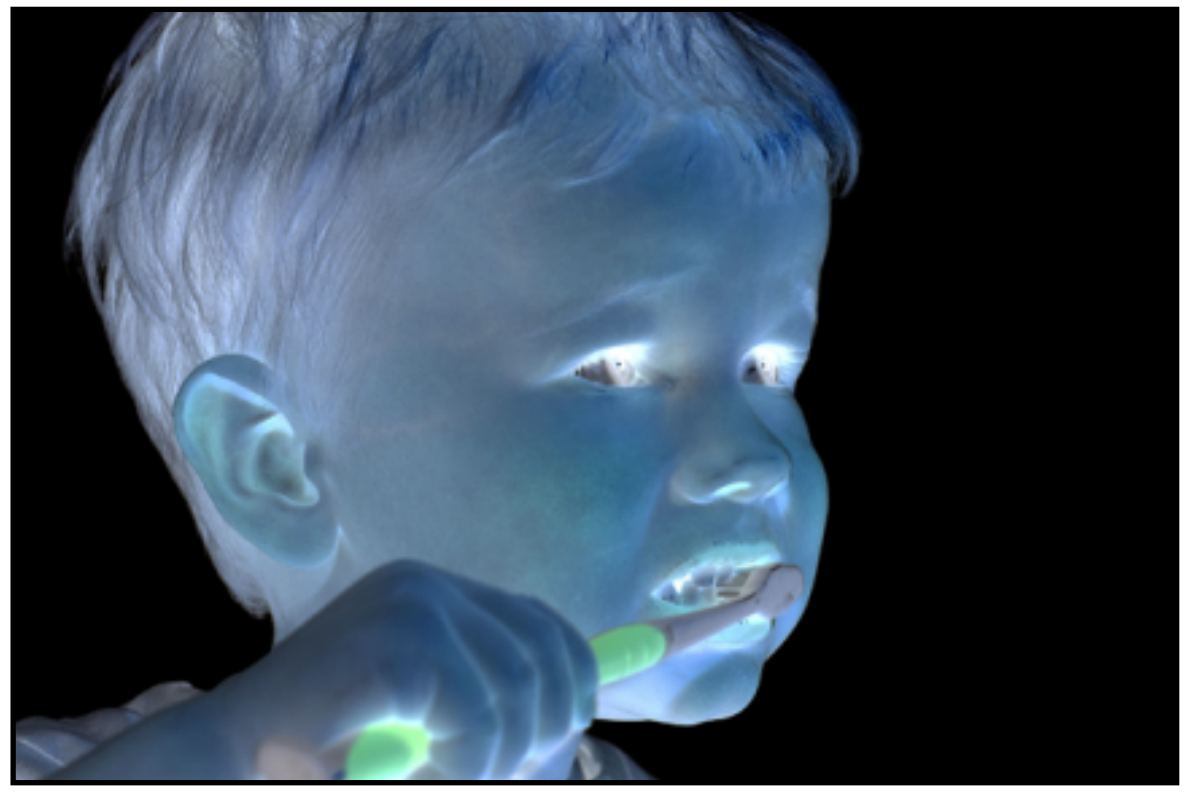

$$255 - x$$

lighten

raise contrast

non-linear raise contrast

How would you implement these?

Examples of point processing

original

$$x$$

darken

$$x - 128$$

lower contrast

$$\frac{x}{2}$$

non-linear lower contrast

$$\left(\frac{x}{255}\right)^{1/3} \times 255$$

invert

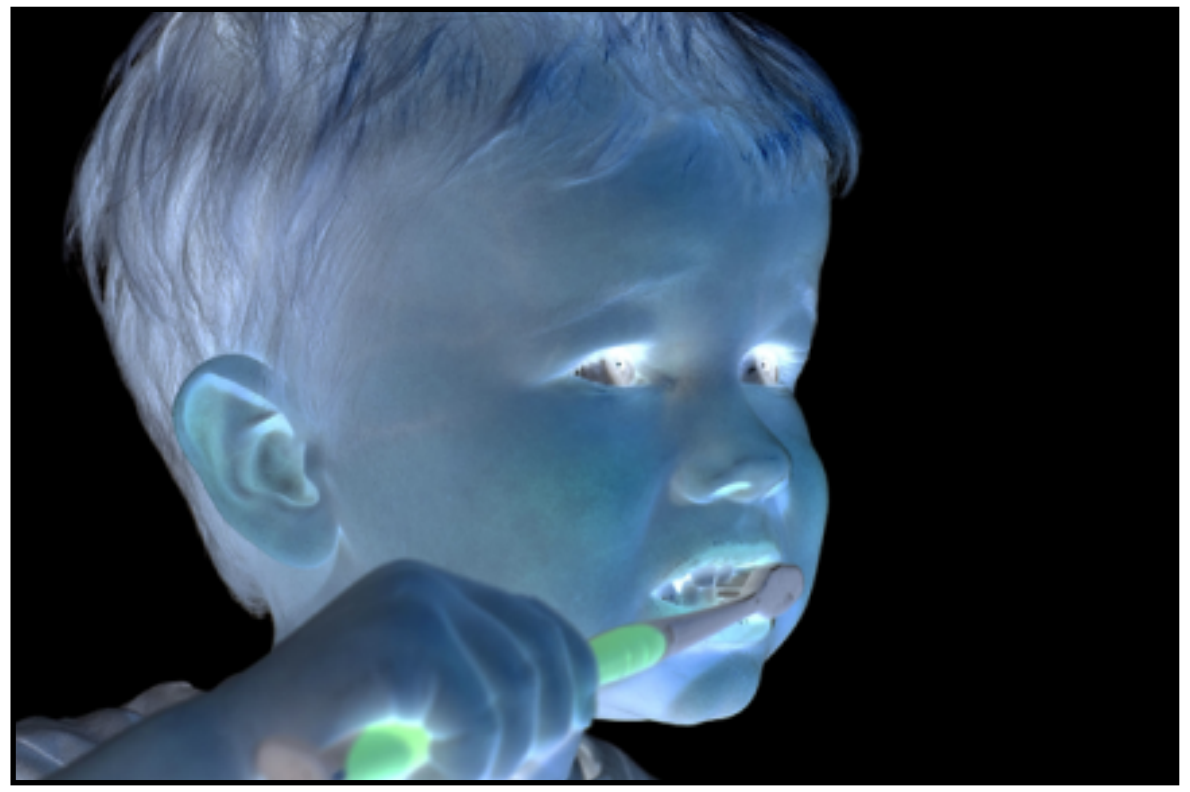

$$255 - x$$

lighten

$$x + 128$$

raise contrast

non-linear raise contrast

How would you implement these?

Examples of point processing

original

$$x$$

darken

$$x - 128$$

lower contrast

$$\frac{x}{2}$$

non-linear lower contrast

$$\left(\frac{x}{255}\right)^{1/3} \times 255$$

invert

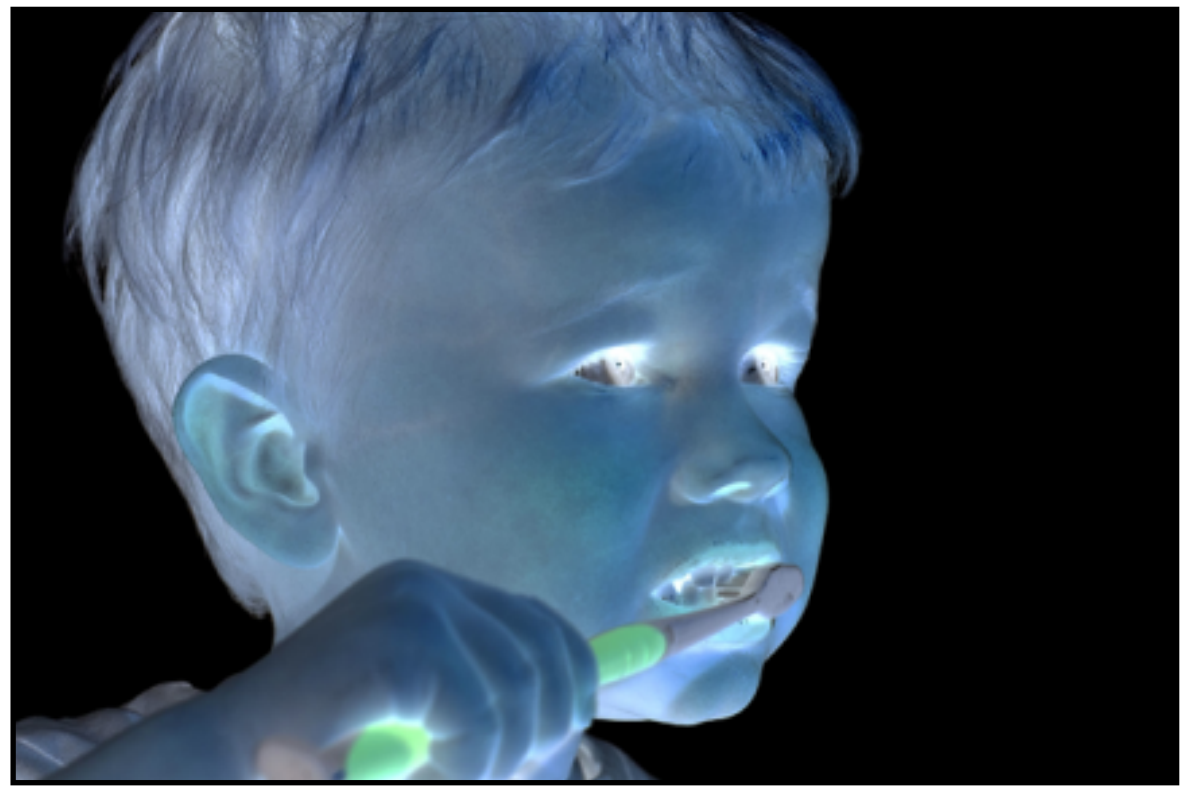

$$255 - x$$

lighten

$$x + 128$$

raise contrast

$$x \times 2$$

non-linear raise contrast

How would you implement these?

Examples of point processing

original

x

darken

$x - 128$

lower contrast

$\frac{x}{2}$

non-linear lower contrast

$\left(\frac{x}{255}\right)^{1/3} \times 255$

invert

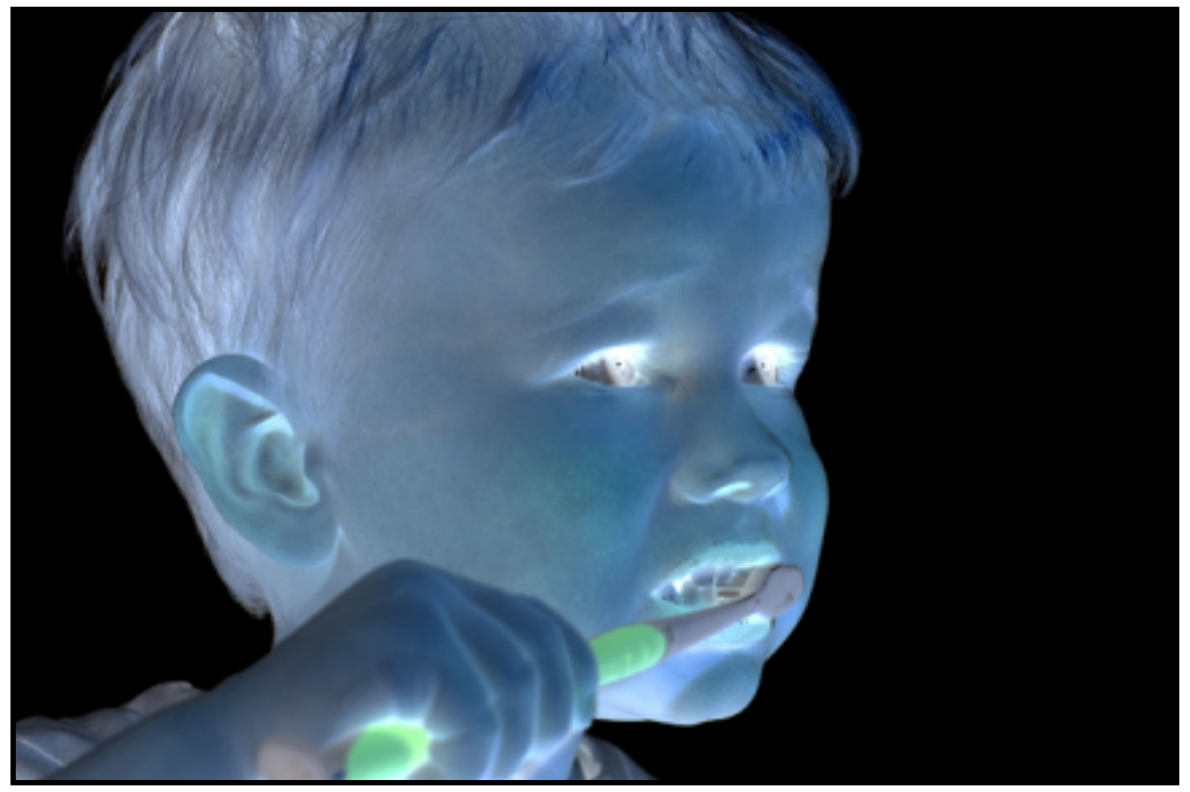

$255 - x$

lighten

$x + 128$

raise contrast

$x \times 2$

non-linear raise contrast

$\left(\frac{x}{255}\right)^{2} \times 255$

Many other types of point processing

camera output

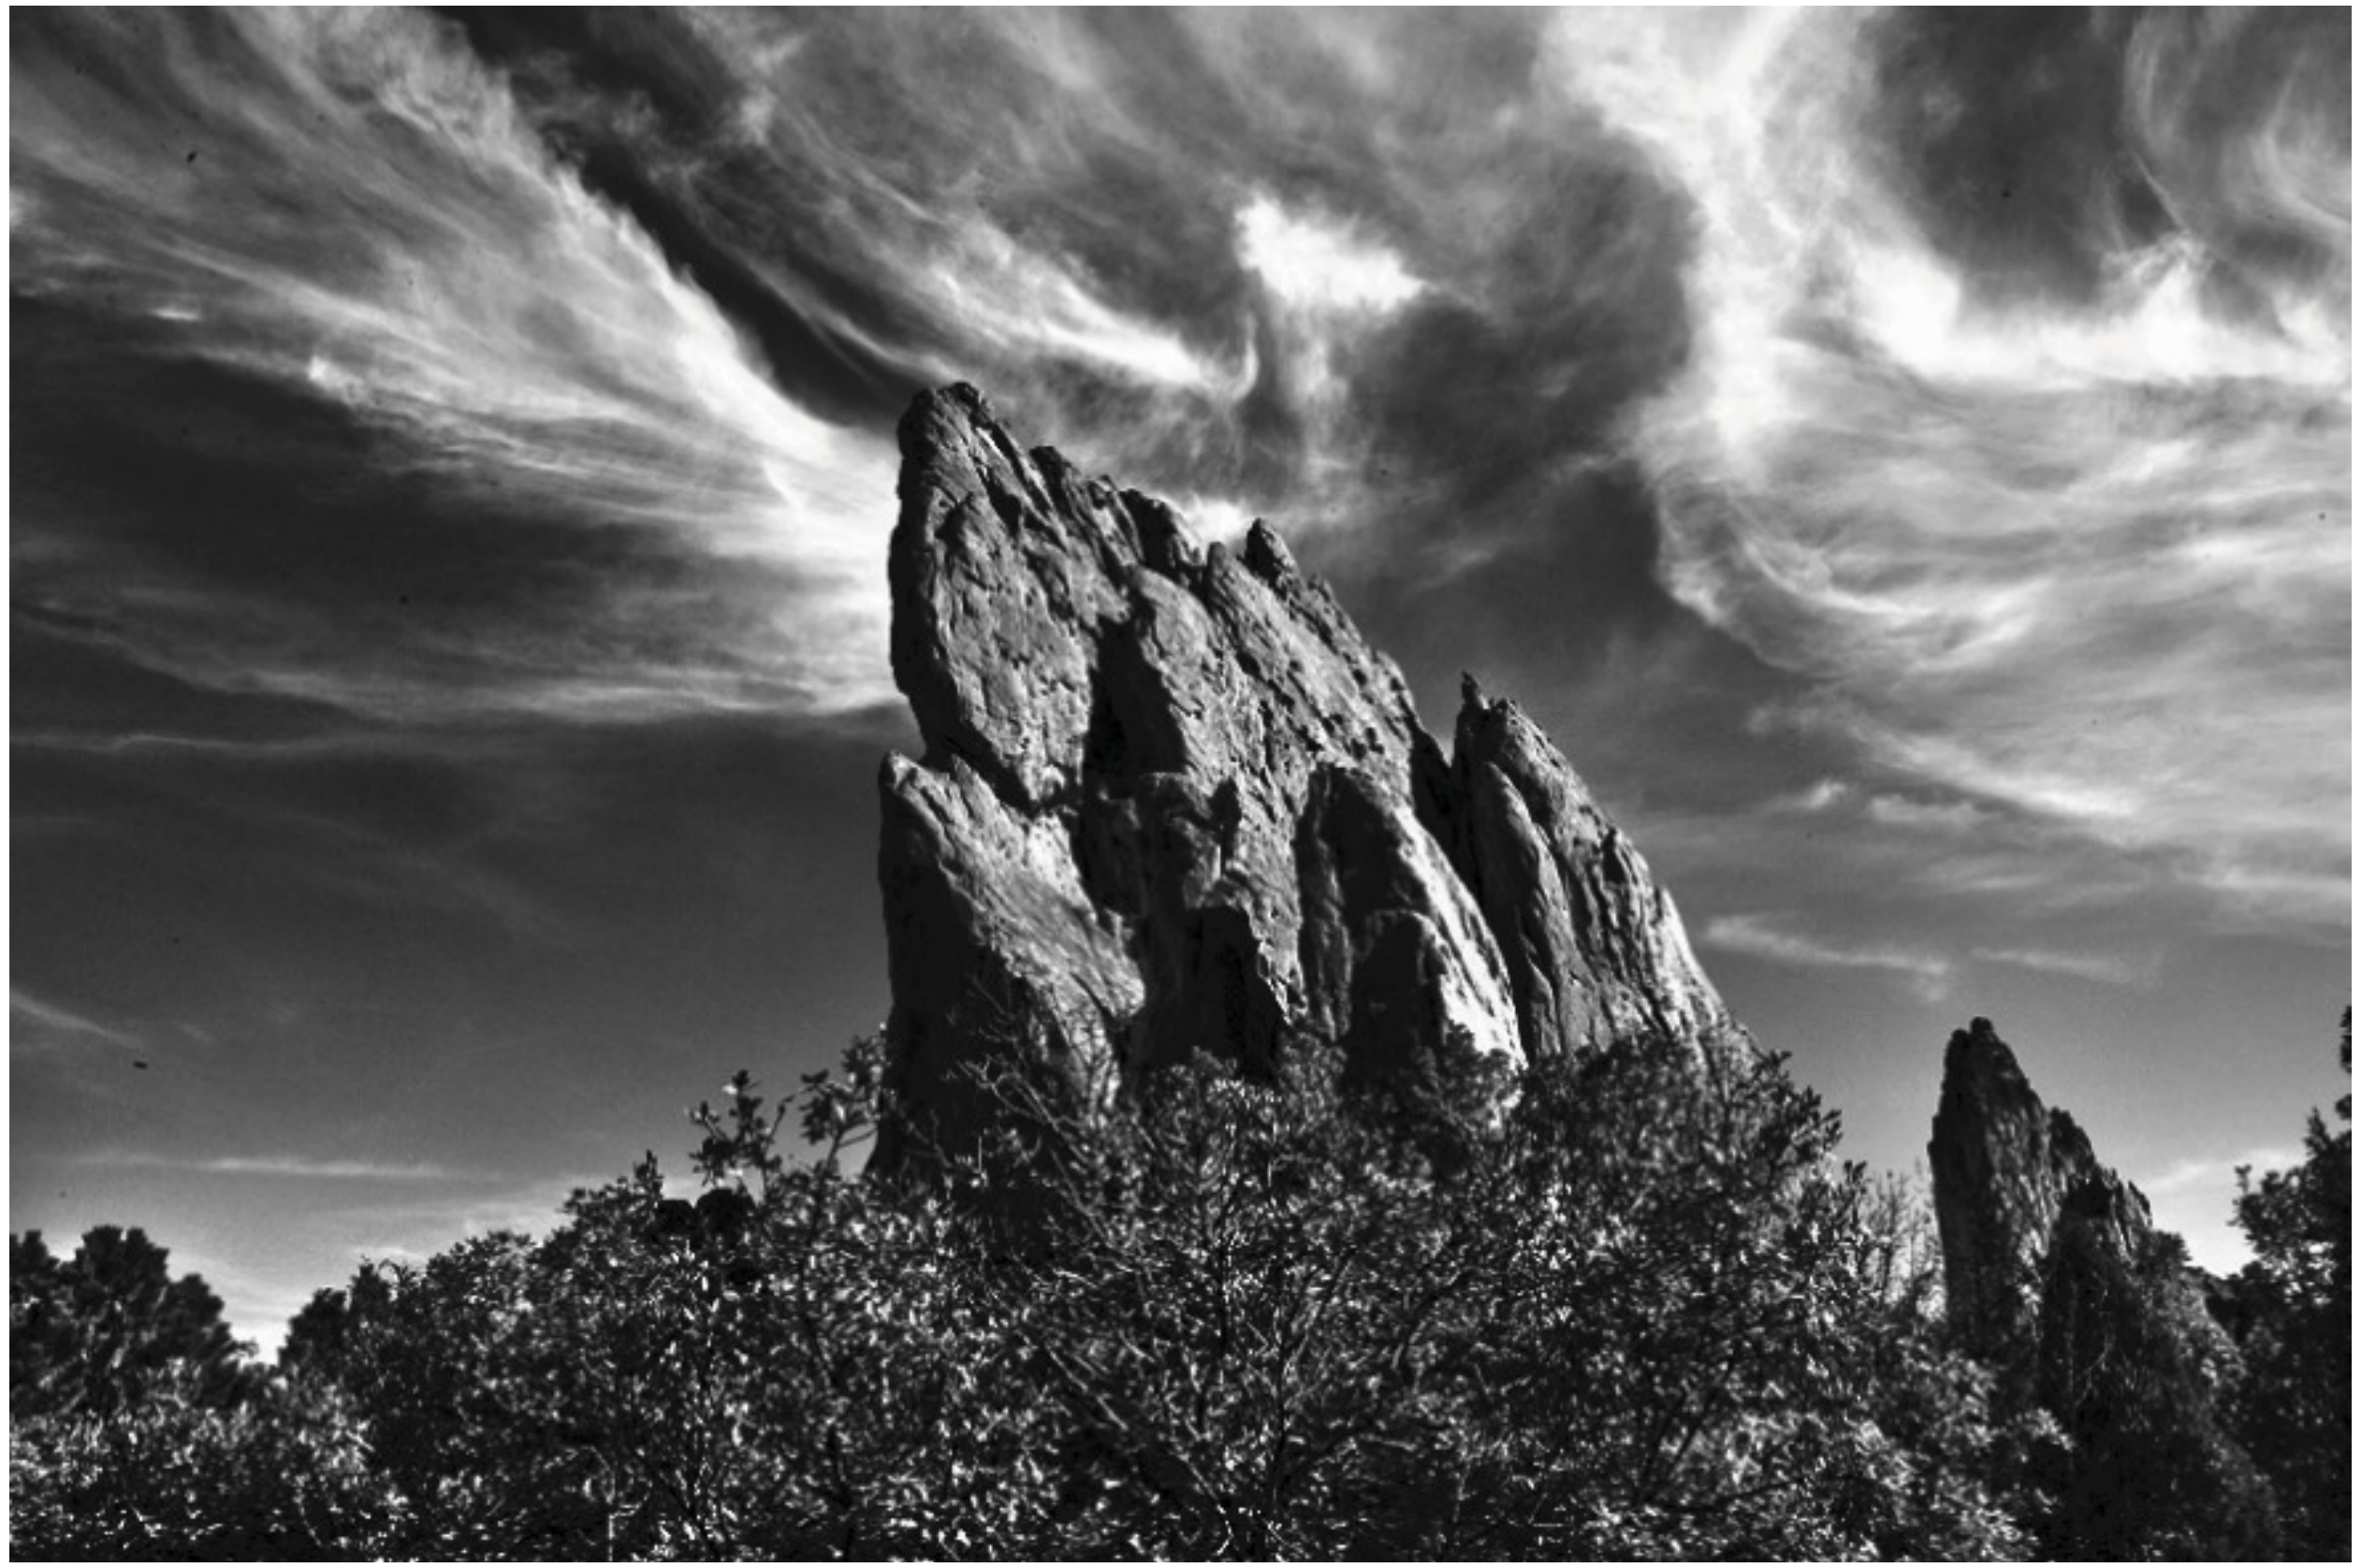

image after stylistic tonemapping

[Bae et al., SIGGRAPH 2006]

Many other types of point processing

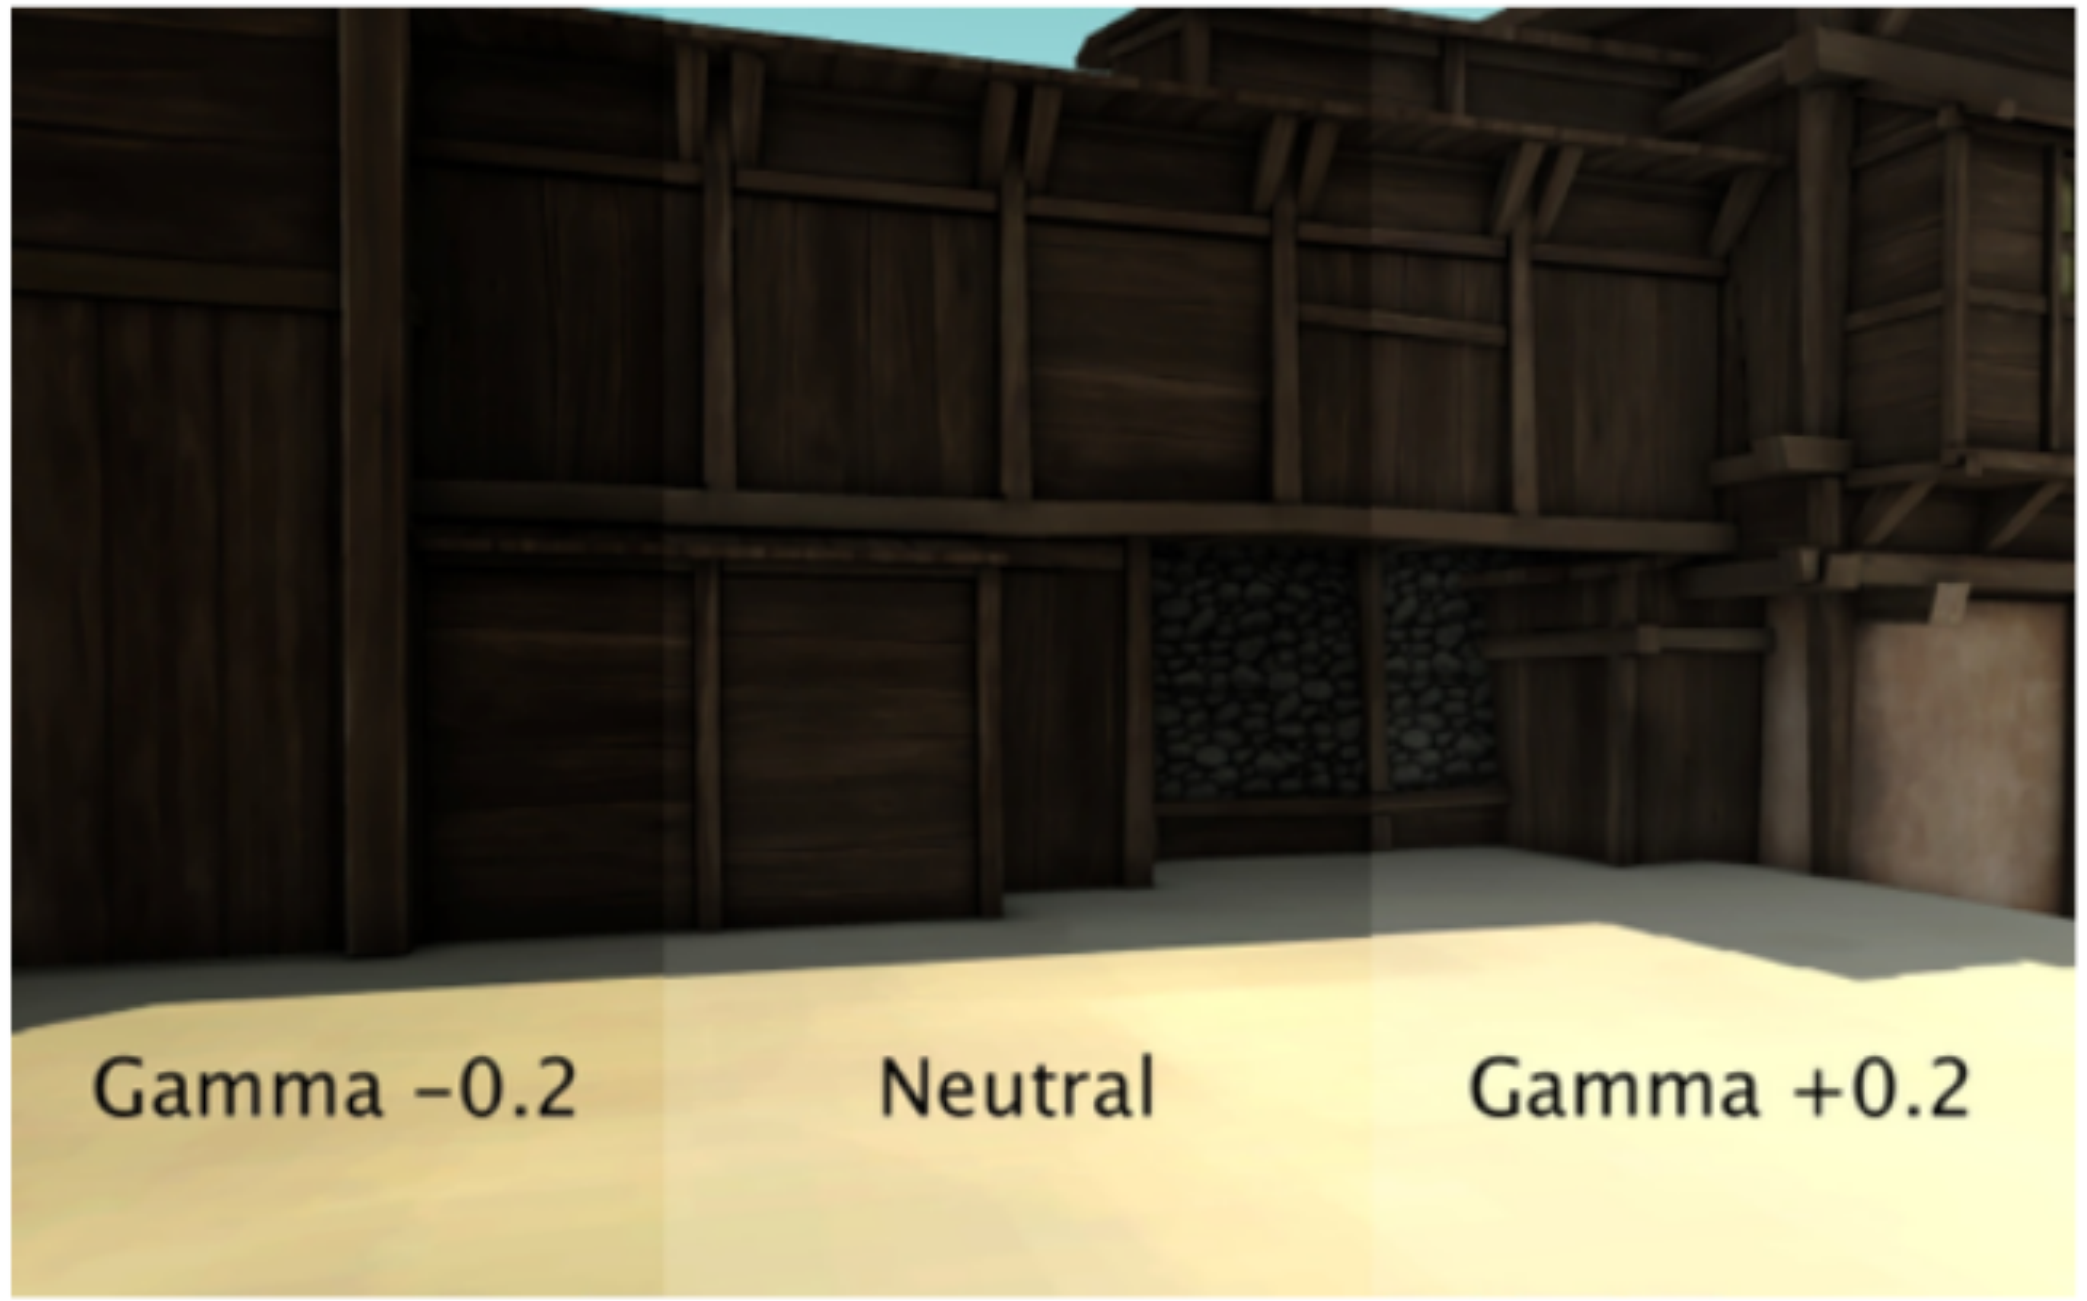

Linear shift-invariant image filtering

Linear shift-invariant image filtering

- Replace each pixel by a *linear* combination of its neighbors (and possibly itself).
- The combination is determined by the filter's *kernel*.
- The same kernel is *shifted* to all pixel locations so that all pixels use the same linear combination of their neighbors.

Example: the box filter

- also known as the 2D rect (not rekt) filter
- also known as the square mean filter

kernel $$g[\cdot,\cdot] = \frac{1}{9}\begin{array}{|c|c|c|}\hline 1 & 1 & 1 \\ \hline 1 & 1 & 1 \\ \hline 1 & 1 & 1 \\ \hline \end{array}$$

- replaces pixel with local average
- has smoothing (blurring) effect

Let’s run the box filter

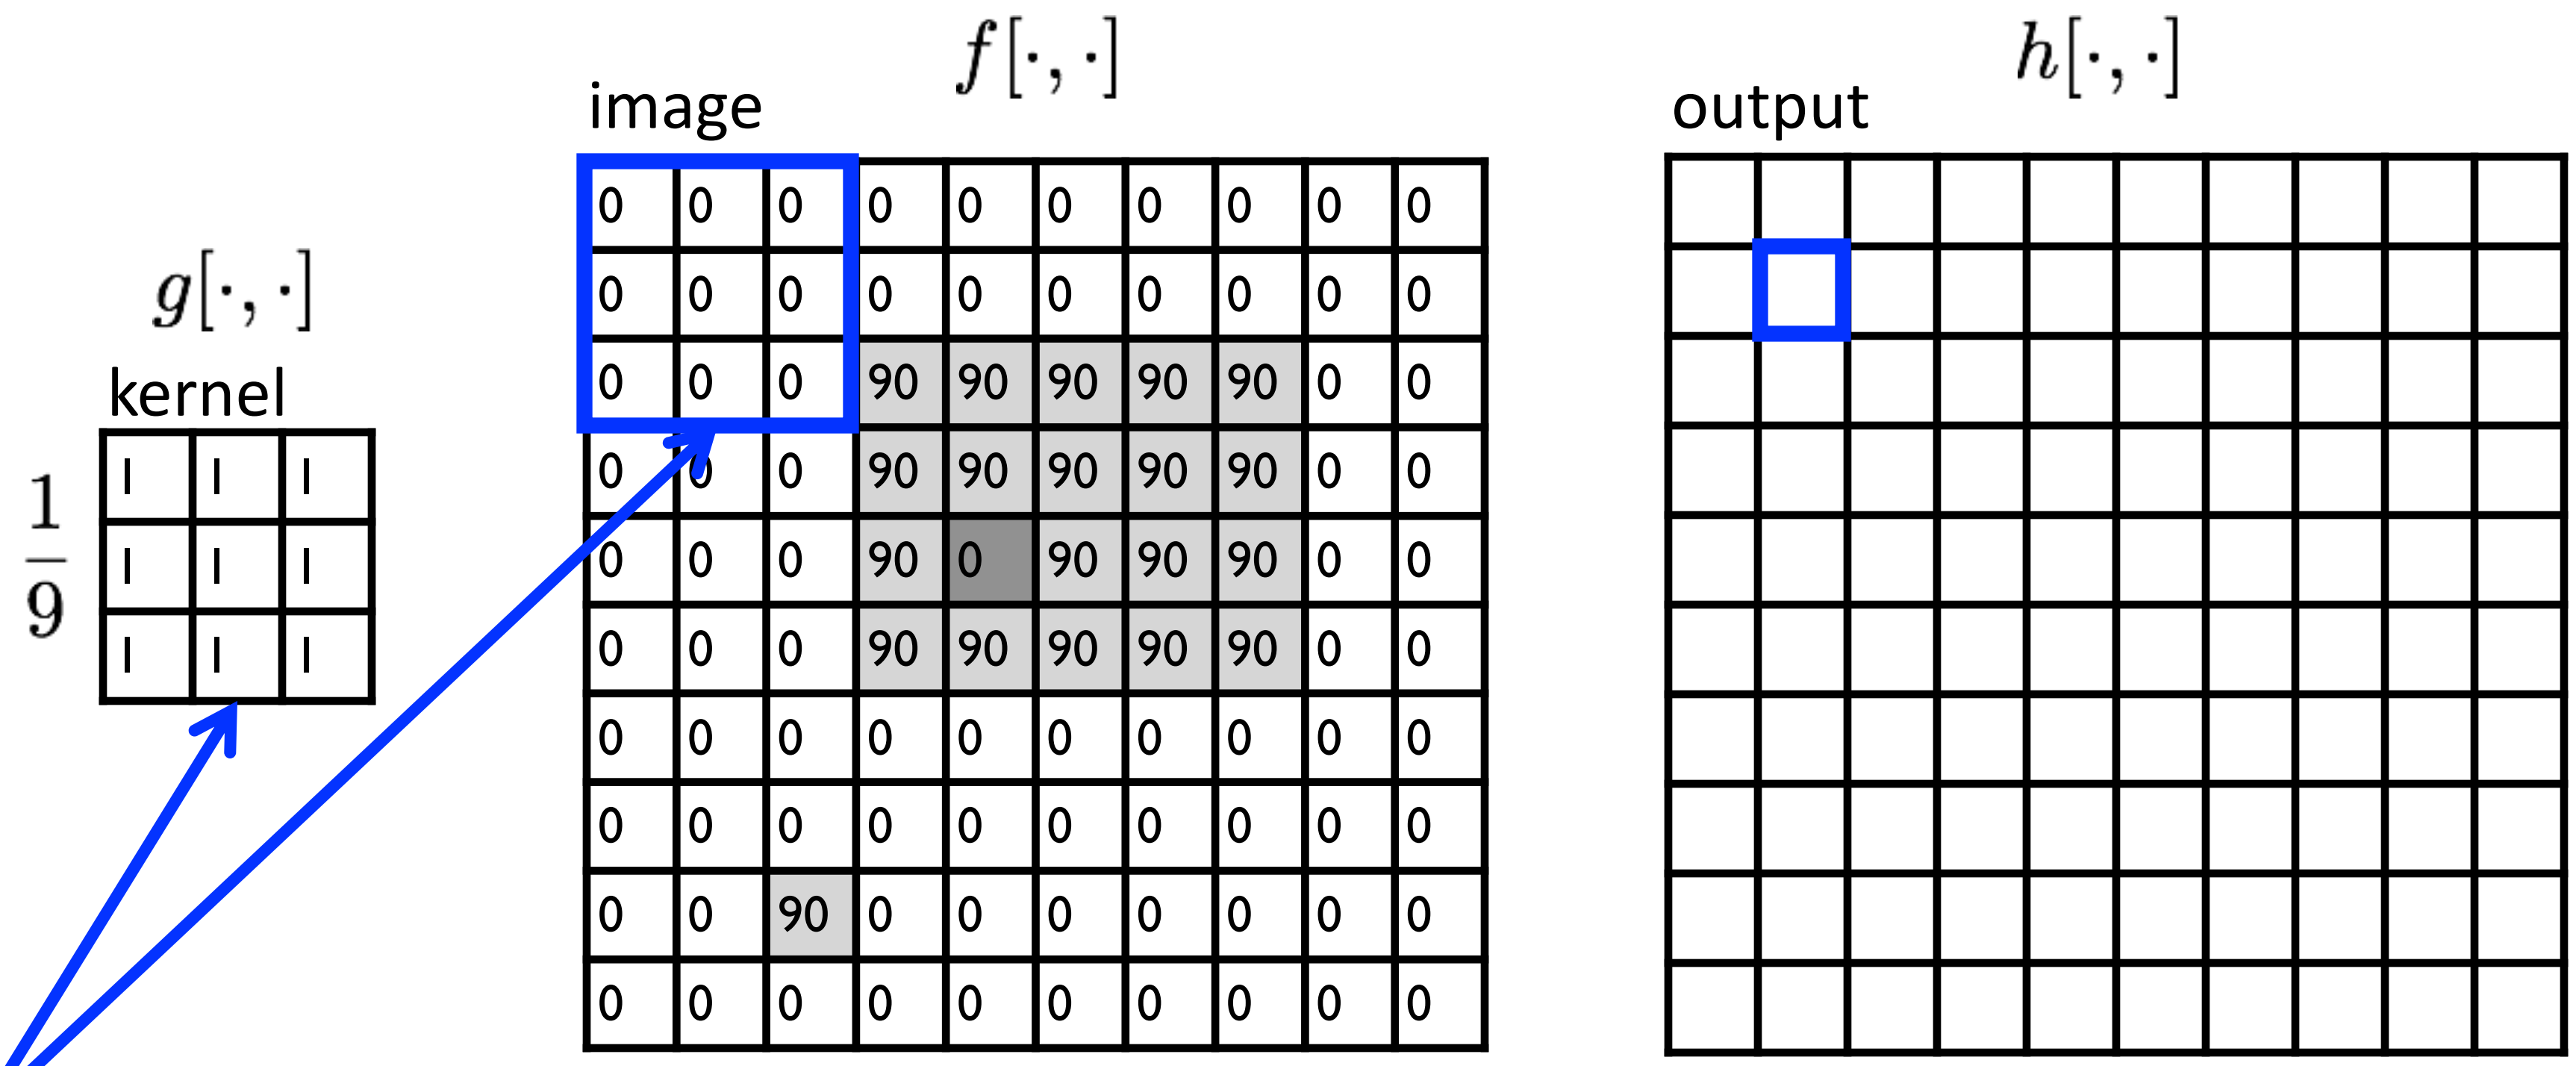

note that we assume that the kernel coordinates are centered

$$h[m,n] = \sum_{k,l} g[k,l]\, f[m+k, n+l]$$

output filter image (signal)

Let's run the box filter

$g[\cdot,\cdot]$

kernel

$$\frac{1}{9}\begin{bmatrix}1 & 1 & 1\\ 1 & 1 & 1\\ 1 & 1 & 1\end{bmatrix}$$

image $f[\cdot,\cdot]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

output $h[\cdot,\cdot]$

	0								

$$\underbrace{h[m,n]}_{\text{output}} = \sum_{k,l} \underbrace{g[k,l]}_{\text{filter}} \underbrace{f[m+k,n+l]}_{\text{image (signal)}}$$

Let’s run the box filter

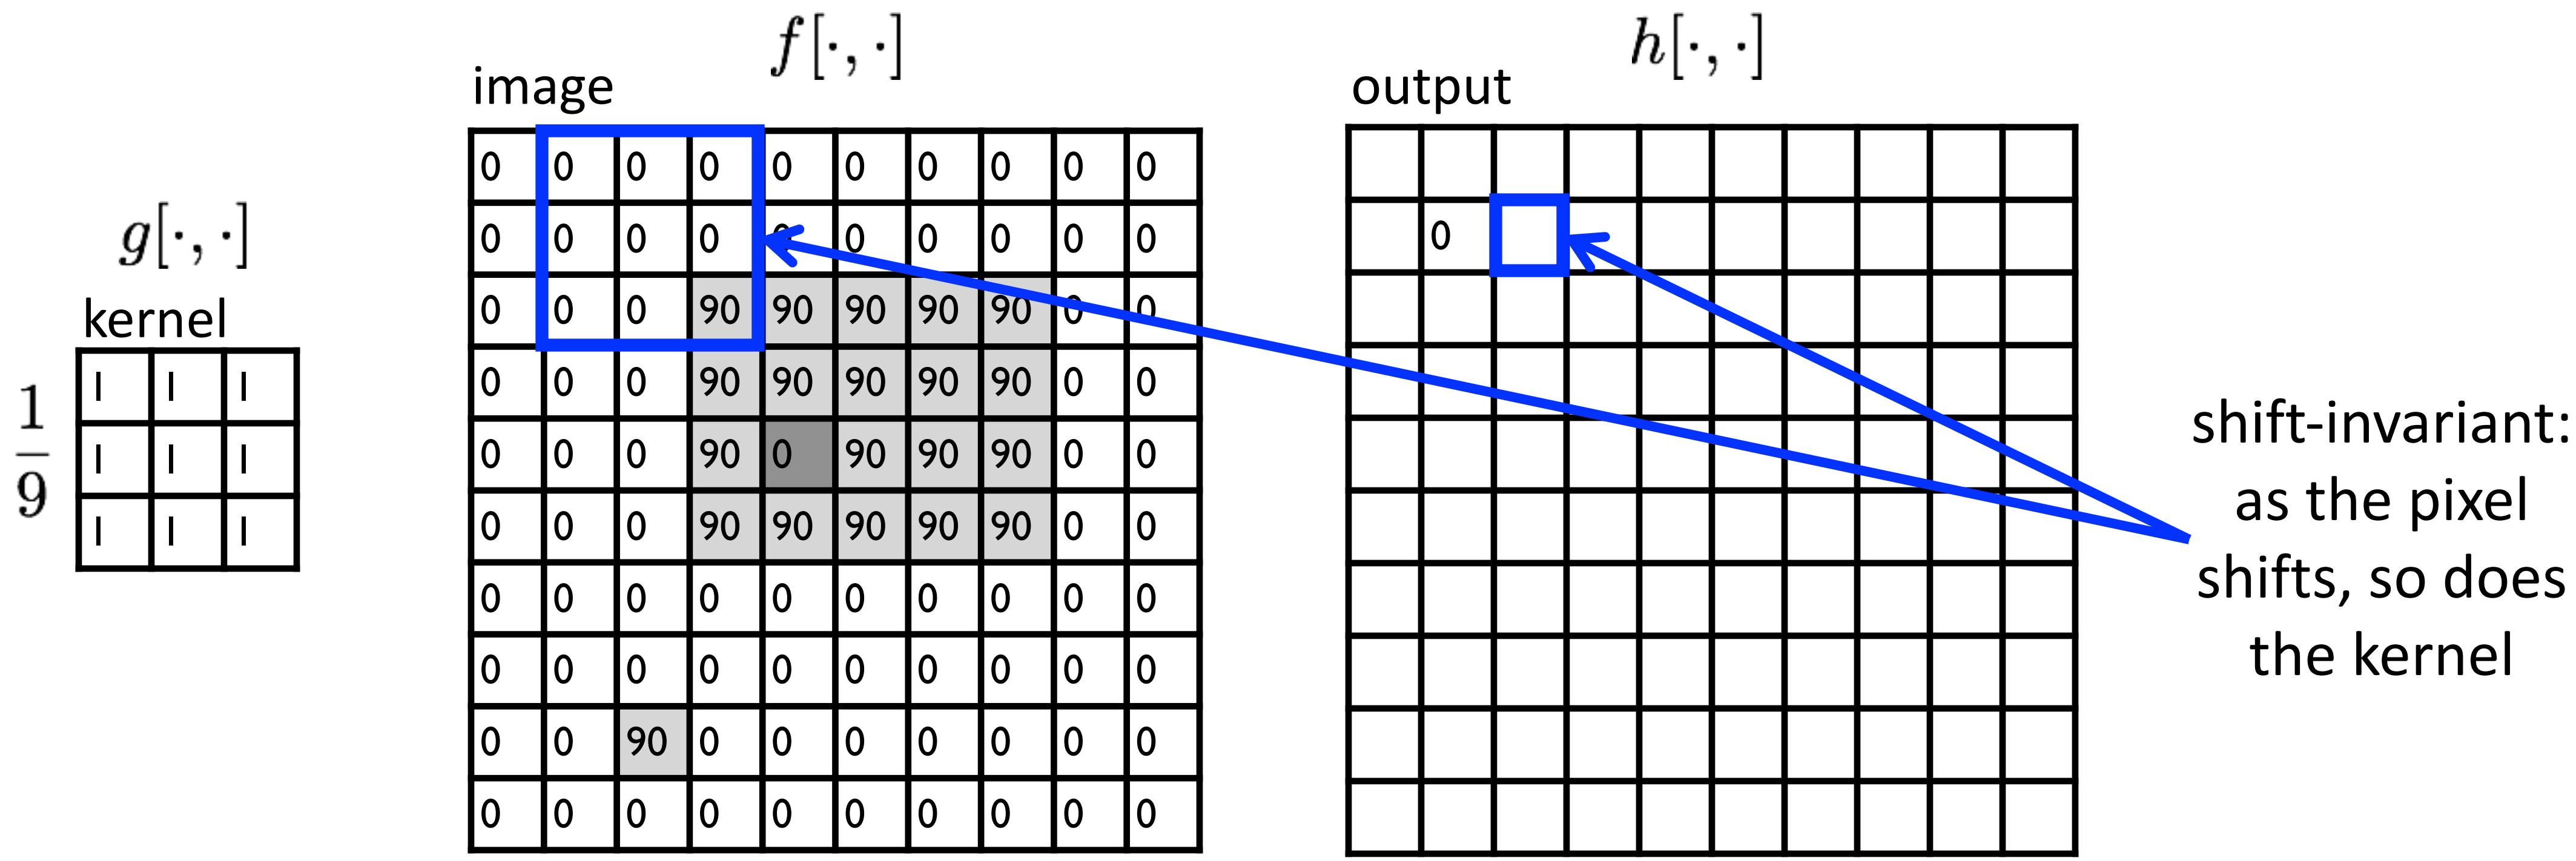

$$h[m,n] = \sum_{k,l} g[k,l]\, f[m+k, n+l]$$

output filter image (signal)

Let’s run the box filter

$g[\cdot,\cdot]$

kernel

$$\frac{1}{9}\begin{bmatrix}1 & 1 & 1\\ 1 & 1 & 1\\ 1 & 1 & 1\end{bmatrix}$$

image $f[\cdot,\cdot]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

output $h[\cdot,\cdot]$

	0	10							

$$\underbrace{h[m,n]}_{\text{output}} = \sum_{k,l} \underbrace{g[k,l]}_{\text{filter}}\, \underbrace{f[m+k,n+l]}_{\text{image (signal)}}$$

Let's run the box filter

$g[\cdot,\cdot]$

kernel

$\frac{1}{9}$

1	1	1
1	1	1
1	1	1

image $f[\cdot,\cdot]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

output $h[\cdot,\cdot]$

	0	10							

$$h[m,n] = \sum_{k,l} g[k,l] f[m+k, n+l]$$

output filter image (signal)

Let's run the box filter

$g[\cdot,\cdot]$

kernel

$\frac{1}{9}$

1	1	1
1	1	1
1	1	1

image $f[\cdot,\cdot]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

output $h[\cdot,\cdot]$

	0	10	20						

$$\underbrace{h[m,n]}_{\text{output}} = \sum_{k,l} \underbrace{g[k,l]}_{\text{filter}} \underbrace{f[m+k,n+l]}_{\text{image (signal)}}$$

Let’s run the box filter

kernel $g[\cdot,\cdot]$

$$\frac{1}{9}\begin{bmatrix}1 & 1 & 1\\ 1 & 1 & 1\\ 1 & 1 & 1\end{bmatrix}$$

image $f[\cdot,\cdot]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

output $h[\cdot,\cdot]$

	0	10	20						

$$\underbrace{h[m,n]}_{\text{output}} = \sum_{k,l} \underbrace{g[k,l]}_{\text{filter}} \underbrace{f[m+k,n+l]}_{\text{image (signal)}}$$

Let’s run the box filter

$g[\cdot,\cdot]$

kernel

$$\frac{1}{9}\begin{bmatrix} 1 & 1 & 1 \\ 1 & 1 & 1 \\ 1 & 1 & 1 \end{bmatrix}$$

image $f[\cdot,\cdot]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

output $h[\cdot,\cdot]$

	0	10	20	30					

$$\underbrace{h[m,n]}_{\text{output}} = \sum_{k,l} \underbrace{g[k,l]}_{\text{filter}} \underbrace{f[m+k,n+l]}_{\text{image (signal)}}$$

Let's run the box filter

$g[\cdot,\cdot]$

kernel

$$\frac{1}{9}\begin{bmatrix}1 & 1 & 1\\ 1 & 1 & 1\\ 1 & 1 & 1\end{bmatrix}$$

image $f[\cdot,\cdot]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

output $h[\cdot,\cdot]$

	0	10	20	30	30				

$$h[m,n] = \sum_{k,l} g[k,l]\, f[m+k, n+l]$$

output filter image (signal)

Let’s run the box filter

kernel $g[\cdot,\cdot]$

$$\frac{1}{9}\begin{bmatrix}1 & 1 & 1\\ 1 & 1 & 1\\ 1 & 1 & 1\end{bmatrix}$$

image $f[\cdot,\cdot]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

output $h[\cdot,\cdot]$

	0	10	20	30	30	30			

$$\underbrace{h[m,n]}_{\text{output}} = \sum_{k,l} \underbrace{g[k,l]}_{\text{filter}}\, \underbrace{f[m+k,n+l]}_{\text{image (signal)}}$$

Let’s run the box filter

$g[\cdot,\cdot]$

kernel

$$\frac{1}{9}\begin{bmatrix}1 & 1 & 1\\ 1 & 1 & 1\\ 1 & 1 & 1\end{bmatrix}$$

image $f[\cdot,\cdot]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

output $h[\cdot,\cdot]$

	0	10	20	30	30	30	20		

$$\underbrace{h[m,n]}_{\text{output}} = \sum_{k,l} \underbrace{g[k,l]}_{\text{filter}} \underbrace{f[m+k,n+l]}_{\text{image (signal)}}$$

Let’s run the box filter

$g[\cdot,\cdot]$

kernel

$\frac{1}{9}$

1	1	1
1	1	1
1	1	1

image $f[\cdot,\cdot]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

output $h[\cdot,\cdot]$

	0	10	20	30	30	30	20	10	

$$h[m,n] = \sum_{k,l} g[k,l]\, f[m+k, n+l]$$

output filter image (signal)

Let’s run the box filter

$g[\cdot,\cdot]$

kernel

$\frac{1}{9}$

1	1	1
1	1	1
1	1	1

image $f[\cdot,\cdot]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

output $h[\cdot,\cdot]$

	0	10	20	30	30	30	20	10	
	0								

$$h[m,n] = \sum_{k,l} g[k,l]\, f[m+k, n+l]$$

output filter image (signal)

Let’s run the box filter

$g[\cdot,\cdot]$

kernel

$$\frac{1}{9}\begin{bmatrix}1&1&1\\1&1&1\\1&1&1\end{bmatrix}$$

image $f[\cdot,\cdot]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

output $h[\cdot,\cdot]$

	0	10	20	30	30	30	20	10	
	0	20							

$$\underbrace{h[m,n]}_{\text{output}} = \sum_{k,l} \underbrace{g[k,l]}_{\text{filter}} \underbrace{f[m+k,n+l]}_{\text{image (signal)}}$$

Let's run the box filter

$g[\cdot,\cdot]$

kernel

$\frac{1}{9}$

1	1	1
1	1	1
1	1	1

image $f[\cdot,\cdot]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

output $h[\cdot,\cdot]$

	0	10	20	30	30	30	20	10	
	0	20	40						

$$h[m,n] = \sum_{k,l} g[k,l]\, f[m+k, n+l]$$

output filter image (signal)

Let’s run the box filter

$g[\cdot,\cdot]$

kernel

$$\frac{1}{9}\begin{bmatrix}1 & 1 & 1\\ 1 & 1 & 1\\ 1 & 1 & 1\end{bmatrix}$$

image $f[\cdot,\cdot]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

output $h[\cdot,\cdot]$

	0	10	20	30	30	30	20	10	
	0	20	40	60	60	60	40	20	
	0								

$$\underbrace{h[m,n]}_{\text{output}} = \sum_{k,l} \underbrace{g[k,l]}_{\text{filter}} \underbrace{f[m+k,n+l]}_{\text{image (signal)}}$$

Let’s run the box filter

kernel $g[\cdot,\cdot]$

$\frac{1}{9}$

1	1	1
1	1	1
1	1	1

image $f[\cdot,\cdot]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

output $h[\cdot,\cdot]$

	0	10	20	30	30	30	20	10	
	0	20	40	60	60	60	40	20	
	0	30							

$$h[m,n] = \sum_{k,l} g[k,l]\, f[m+k, n+l]$$

output filter image (signal)

Let’s run the box filter

$g[\cdot,\cdot]$

kernel

$\frac{1}{9}$

1	1	1
1	1	1
1	1	1

image $f[\cdot,\cdot]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

output $h[\cdot,\cdot]$

	0	10	20	30	30	30	20	10	
	0	20	40	60	60	60	40	20	
	0	30	50	80	80	90	60	30	
	0	30	50	80	80	90	60	30	
	0	20	30	50	50	60	40	20	
	0	10	20	30	30	30	20	10	
	10	10	10	10	0	0	0	0	
	10								

$$\underbrace{h[m,n]}_{\text{output}} = \sum_{k,l} \underbrace{g[k,l]}_{\text{filter}} \underbrace{f[m+k,n+l]}_{\text{image (signal)}}$$

Let’s run the box filter

$g[\cdot,\cdot]$

kernel

$\frac{1}{9}$

1	1	1
1	1	1
1	1	1

image $f[\cdot,\cdot]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

output $h[\cdot,\cdot]$

	0	10	20	30	30	30	20	10	
	0	20	40	60	60	60	40	20	
	0	30	50	80	80	90	60	30	
	0	30	50	80	80	90	60	30	
	0	20	30	50	50	60	40	20	
	0	10	20	30	30	30	20	10	
	10	10	10	10	0	0	0	0	
	10	10	10	10	0	0	0	0	

$$h[m,n] = \sum_{k,l} g[k,l]\, f[m+k, n+l]$$

output filter image (signal)

… and the result is

kernel $g[\cdot,\cdot]$

$$\frac{1}{9}\begin{bmatrix}1 & 1 & 1\\ 1 & 1 & 1\\ 1 & 1 & 1\end{bmatrix}$$

image $f[\cdot,\cdot]$

0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	90	0	90	90	90	0	0
0	0	0	90	90	90	90	90	0	0
0	0	0	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0
0	0	90	0	0	0	0	0	0	0
0	0	0	0	0	0	0	0	0	0

output $h[\cdot,\cdot]$

	0	10	20	30	30	30	20	10	
	0	20	40	60	60	60	40	20	
	0	30	50	80	80	90	60	30	
	0	30	50	80	80	90	60	30	
	0	20	30	50	50	60	40	20	
	0	10	20	30	30	30	20	10	
	10	10	10	10	0	0	0	0	
	10	10	10	10	0	0	0	0	

$$\underbrace{h[m,n]}_{\text{output}} = \sum_{k,l} \underbrace{g[k,l]}_{\text{filter}}\, \underbrace{f[m+k,n+l]}_{\text{image (signal)}}$$

Some more realistic examples

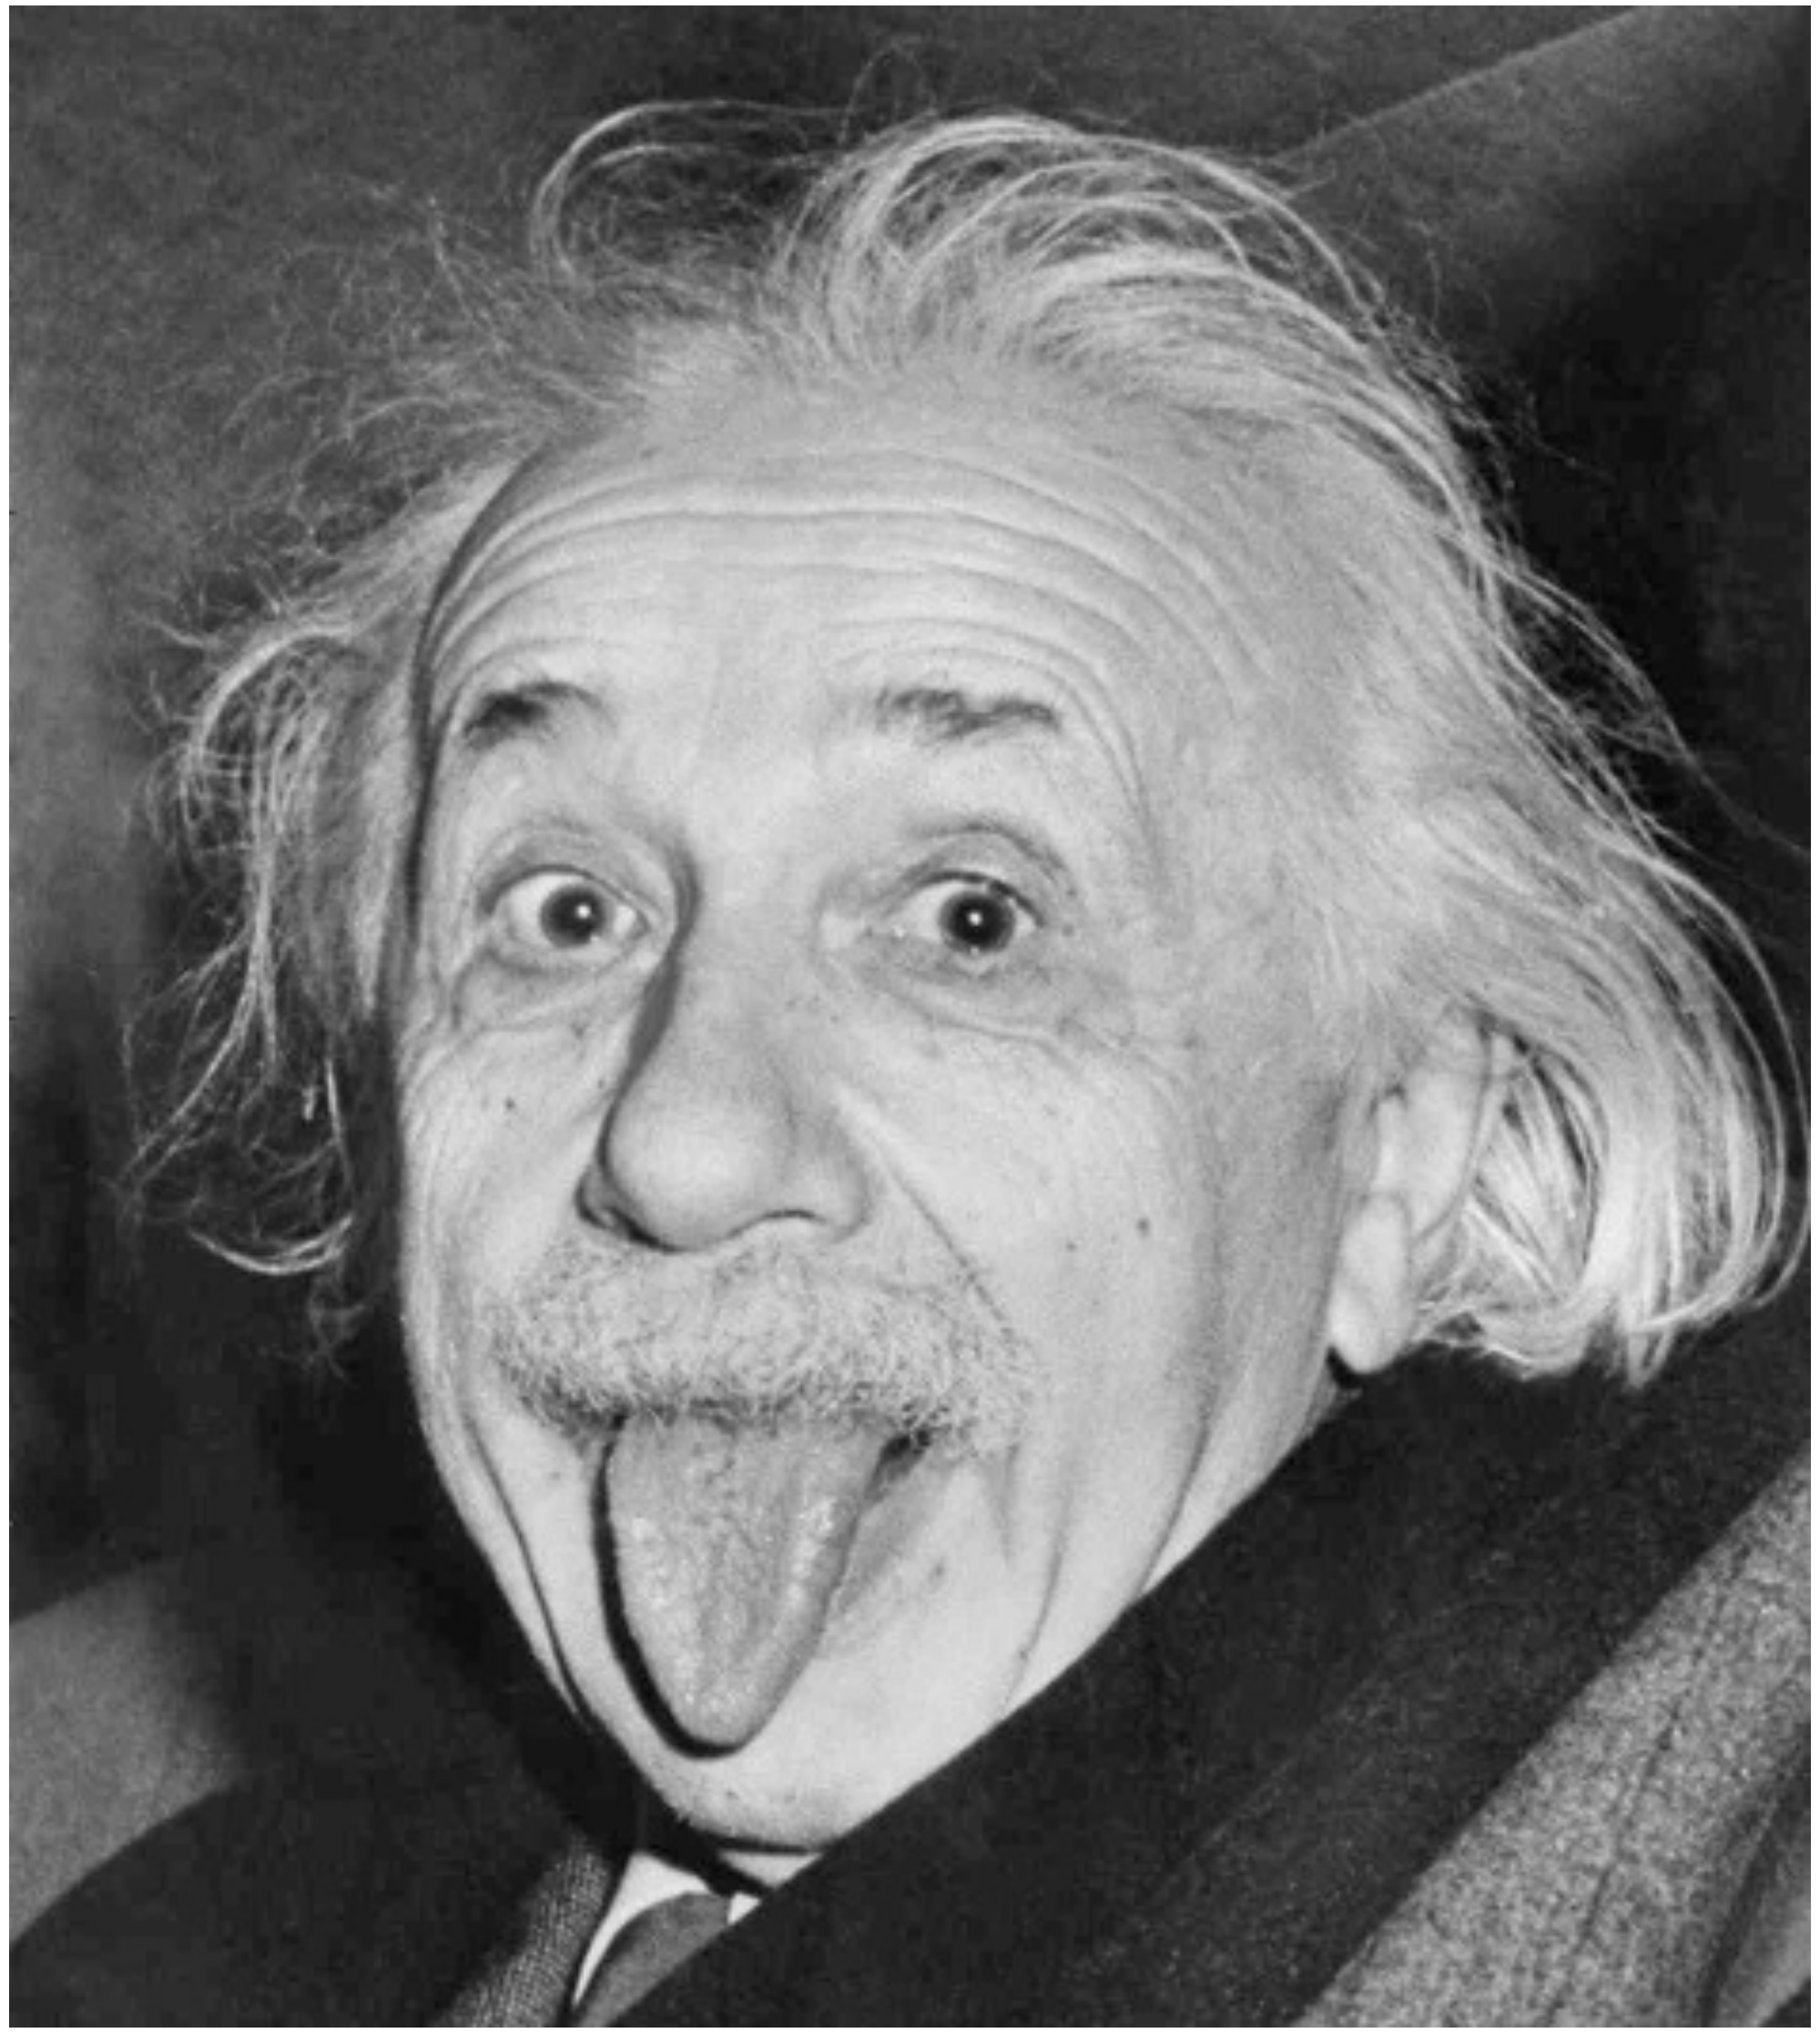

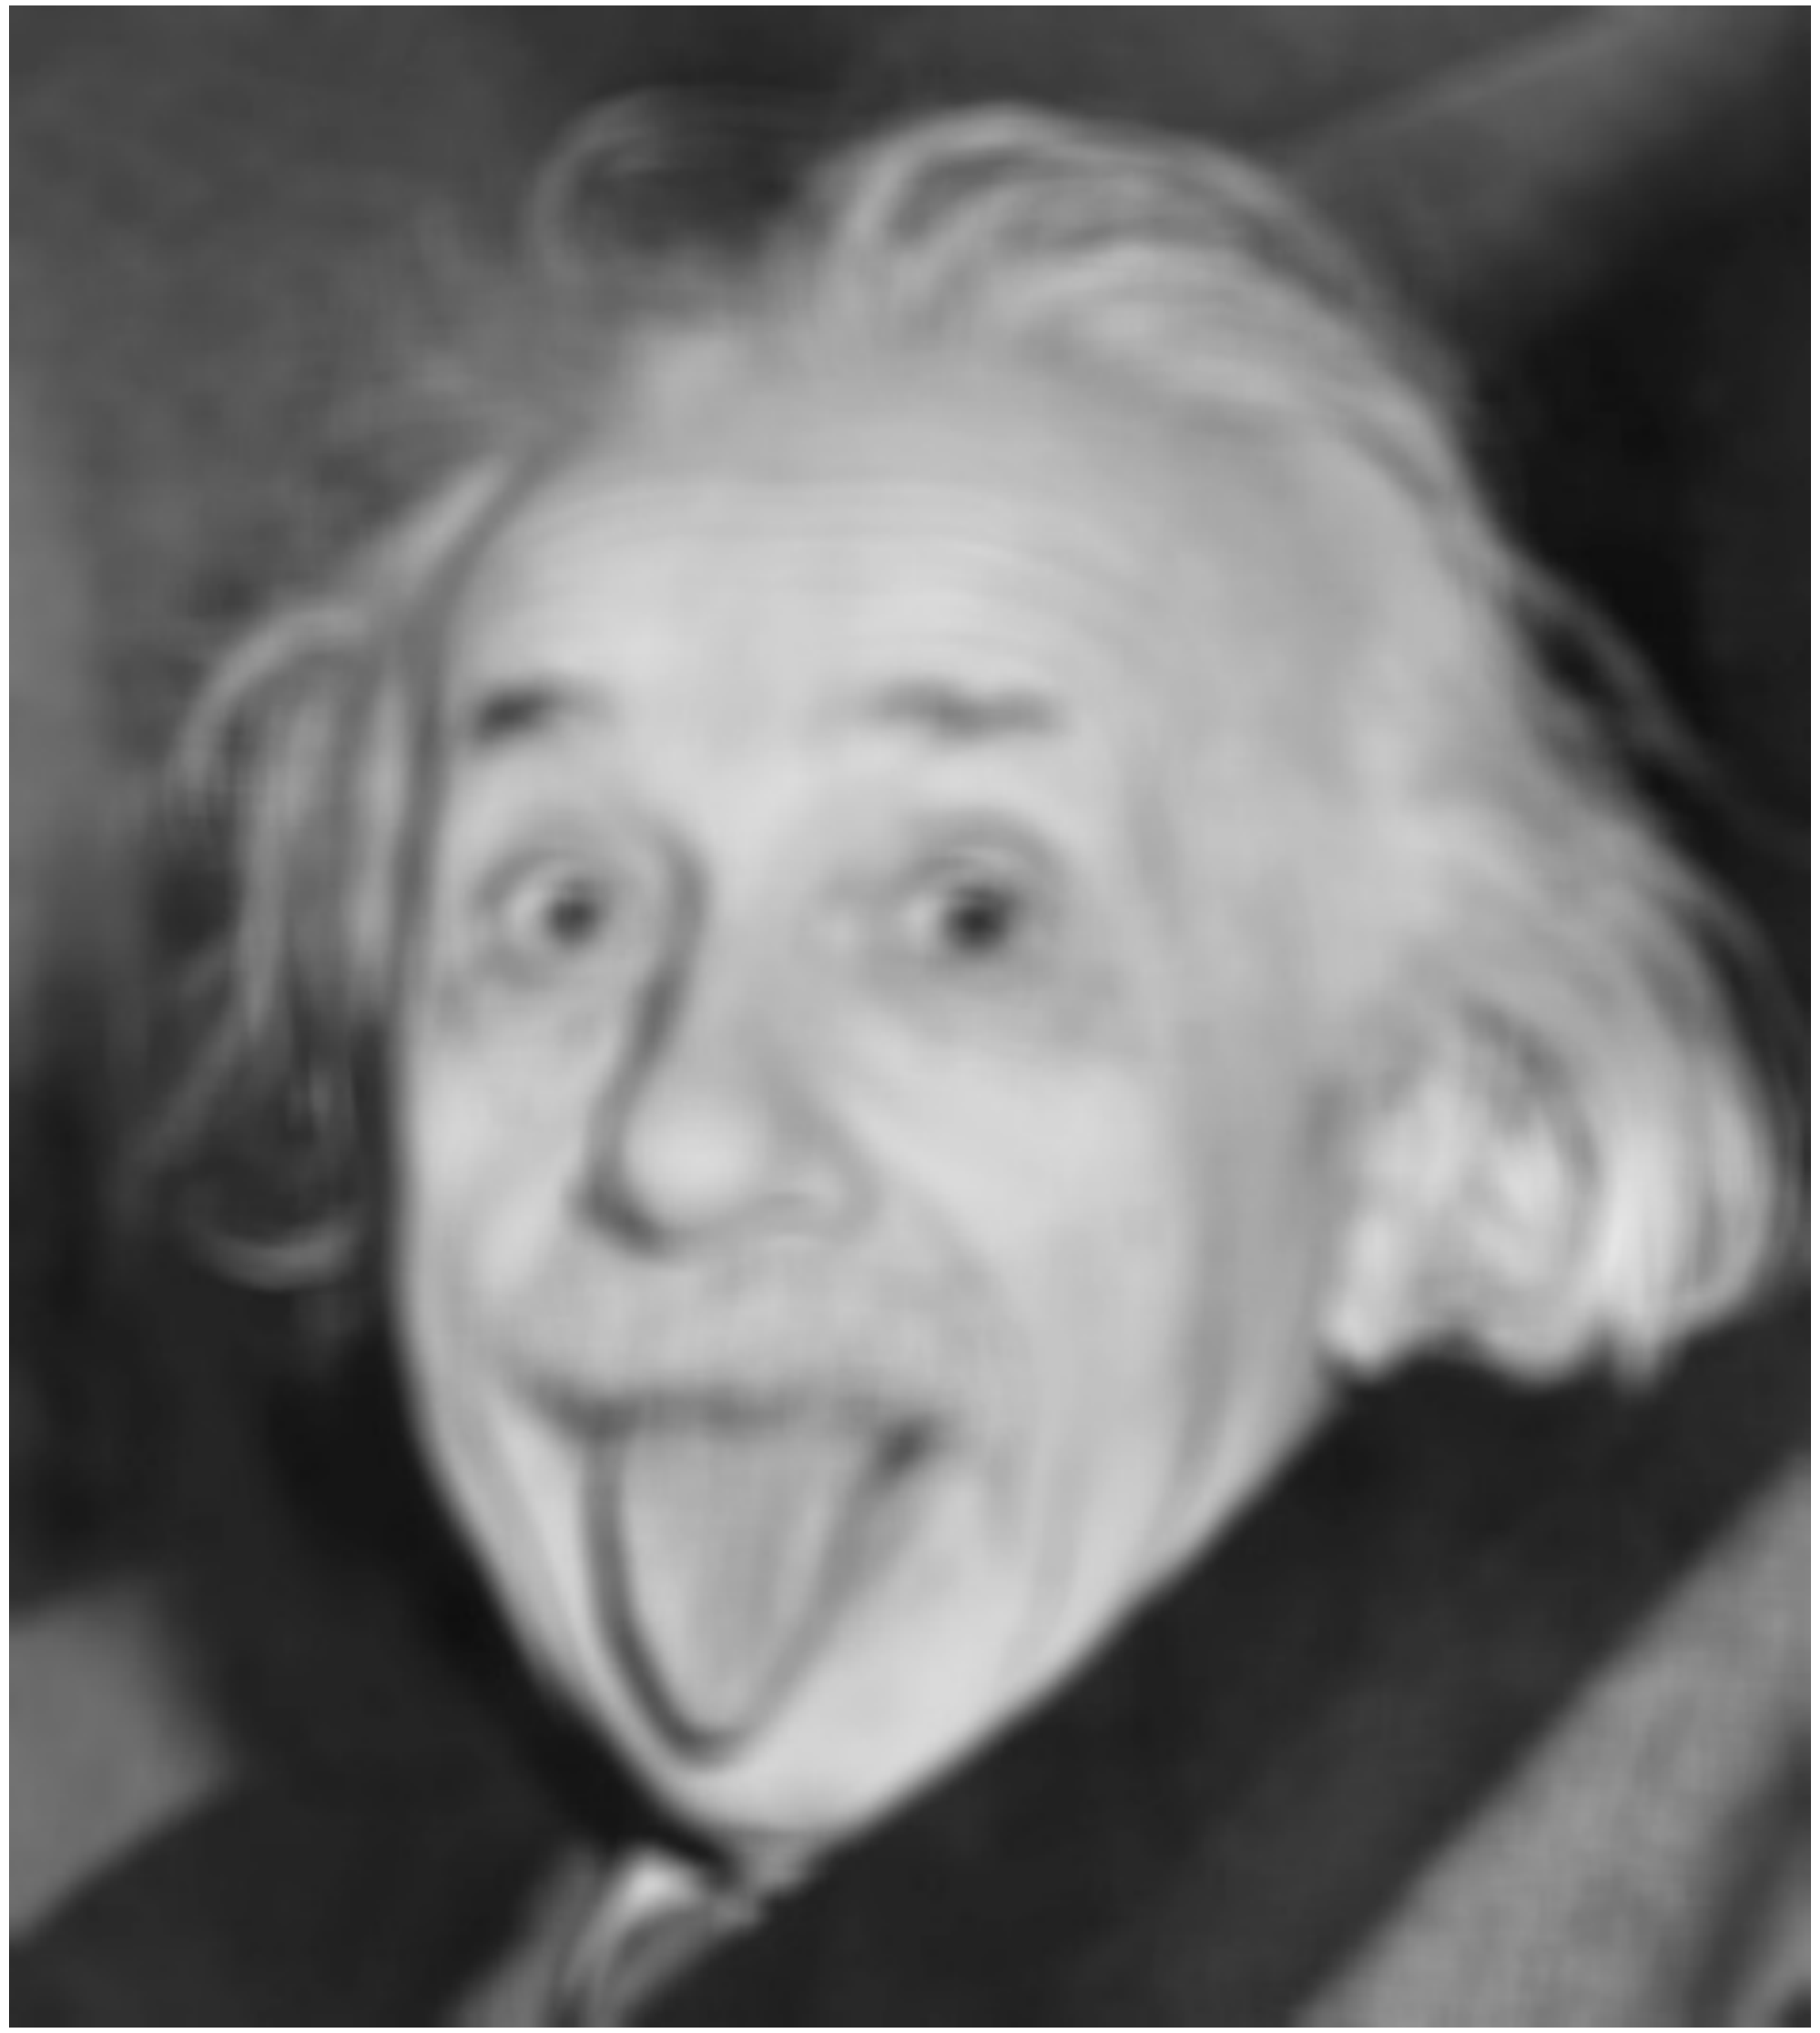

Some more realistic examples

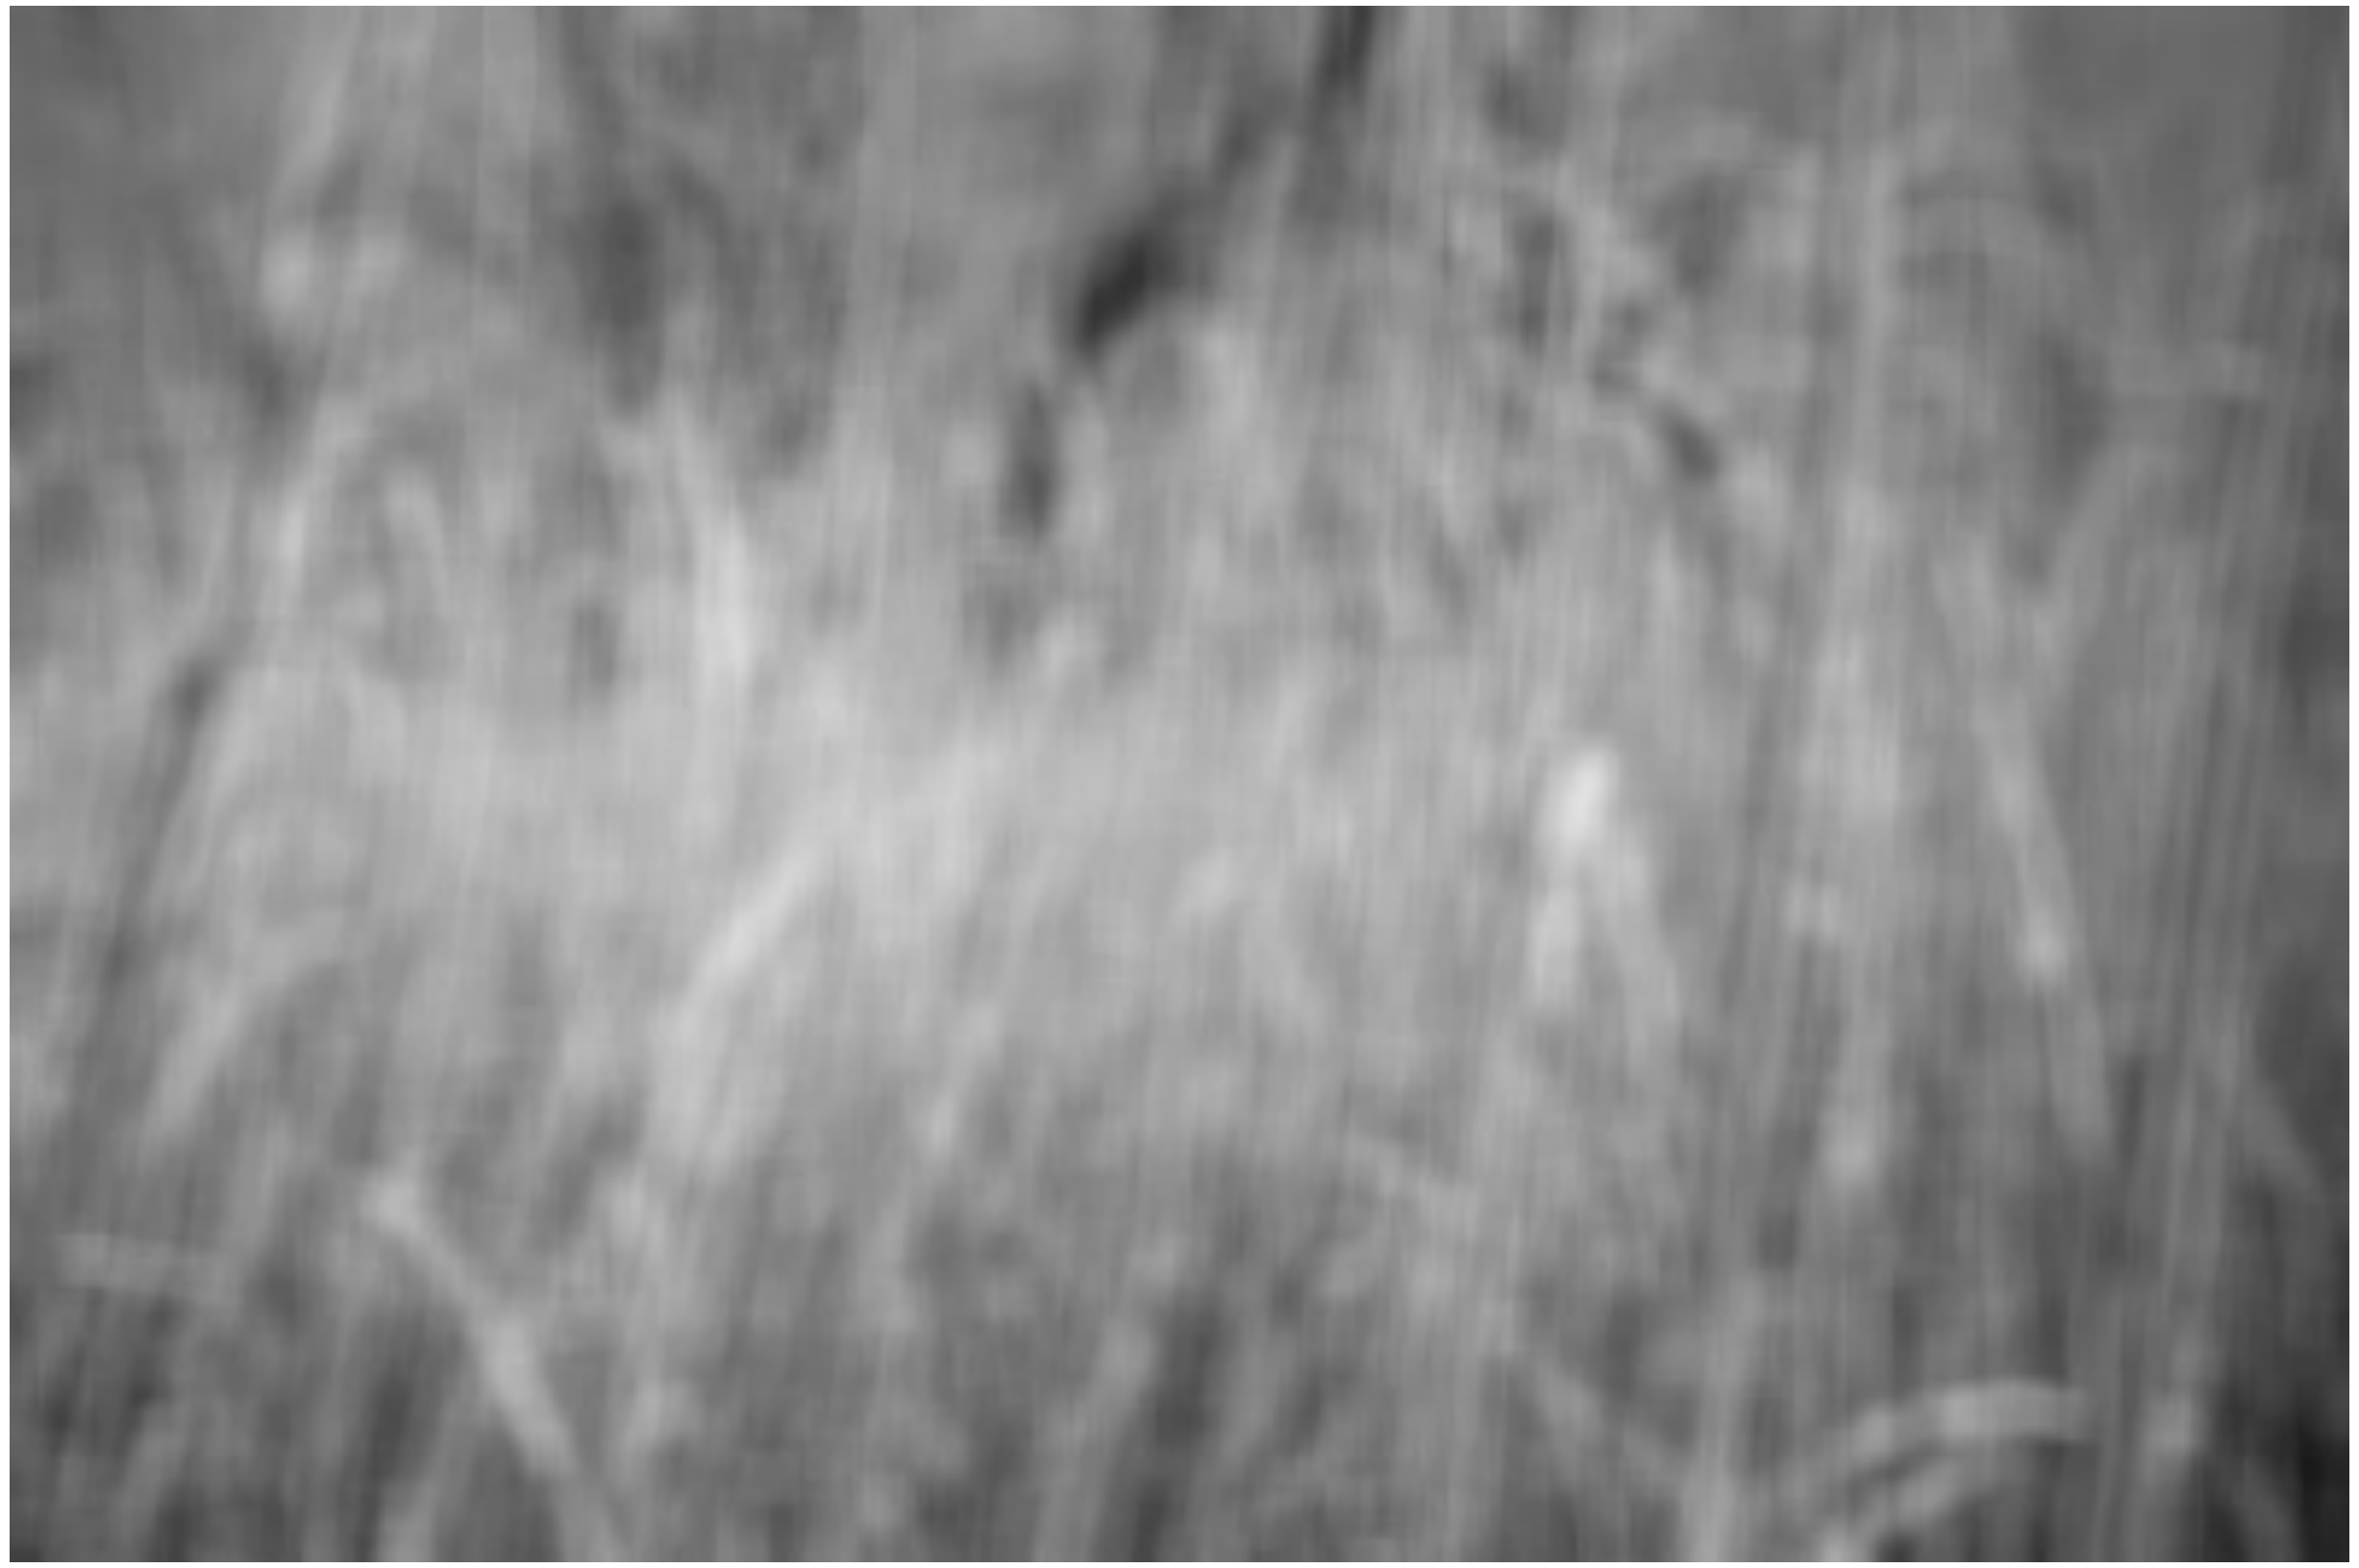

Some more realistic examples

Convolution

Convolution for 1D continuous signals

Definition of filtering as convolution:

notice the flip

$$(f * g)(x) = \int_{-\infty}^{\infty} f(y)g(x-y)dy$$

filtered signal

filter

input signal

Convolution for 1D continuous signals

Definition of filtering as convolution:

notice the flip

$$(f * g)(x) = \int_{-\infty}^{\infty} f(y) g(x - y) dy$$

filtered signal

filter

input signal

Consider the box filter example:

1D continuous box filter

$$f(x) = \begin{cases} 1 & |x| \leq 0.5 \\ 0 & otherwise \end{cases}$$

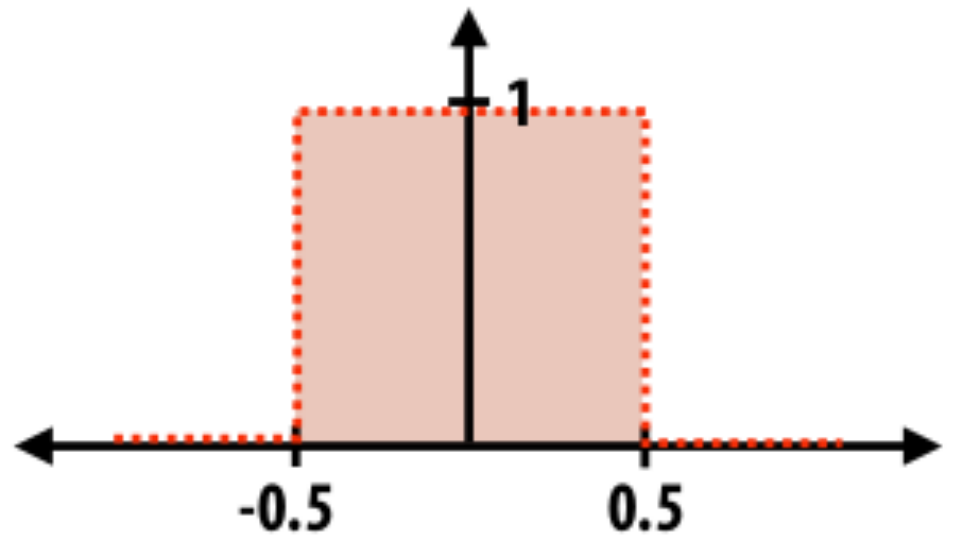

filtering output is a blurred version of g

$$(f * g)(x) = \int_{-0.5}^{0.5} g(x - y) dy$$

Convolution for 2D discrete signals

Definition of filtering as convolution:

notice the flip

$$(f * g)(x, y) = \sum_{i,j=-\infty}^{\infty} f(i,j) I(x-i, y-j)$$

filtered image

filter

input image

Convolution for 2D discrete signals

Definition of filtering as convolution:

notice the flip

$$(f * g)(x,y) = \sum_{i,j=-\infty}^{\infty} f(i,j) I(x-i, y-j)$$

filtered image

filter

input image

If the filter $f(i,j)$ is non-zero only within $-1 \leq i,j \leq 1$, then

$$(f * g)(x,y) = \sum_{i,j=-1}^{1} f(i,j) I(x-i, y-j)$$

The kernel we saw earlier is the 3x3 matrix representation of $f(i,j)$.

Convolution vs correlation

Definition of filtering as convolution:

notice the flip

$$(f * g)(x, y) = \sum_{i,j=-\infty}^{\infty} f(i,j) I(x - i, y - j)$$

Definition of filtering as correlation:

notice the lack of a flip

$$(f * g)(x, y) = \sum_{i,j=-\infty}^{\infty} f(i,j) I(x + i, y + j)$$

- Most of the time won't matter, because our kernels will be symmetric.
- Will be important when we discuss frequency-domain filtering (lectures 5-6).

Separable filters

A 2D filter is separable if it can be written as the product of a “column” and a “row”.

example:
box filter

$$\begin{bmatrix} 1 & 1 & 1 \\ 1 & 1 & 1 \\ 1 & 1 & 1 \end{bmatrix} = \underbrace{\begin{bmatrix} 1 \\ 1 \\ 1 \end{bmatrix}}_{\text{column}} * \underbrace{\begin{bmatrix} 1 & 1 & 1 \end{bmatrix}}_{\text{row}}$$

What is the rank of this filter matrix?

Separable filters

A 2D filter is separable if it can be written as the product of a “column” and a “row”.

example: box filter

$$\begin{bmatrix} 1 & 1 & 1 \\ 1 & 1 & 1 \\ 1 & 1 & 1 \end{bmatrix} = \underbrace{\begin{bmatrix} 1 \\ 1 \\ 1 \end{bmatrix}}_{\text{column}} * \underbrace{\begin{bmatrix} 1 & 1 & 1 \end{bmatrix}}_{\text{row}}$$

Why is this important?

Separable filters

A 2D filter is separable if it can be written as the product of a “column” and a “row”.

example:
box filter

$$\begin{bmatrix}1&1&1\\1&1&1\\1&1&1\end{bmatrix} = \underbrace{\begin{bmatrix}1\\1\\1\end{bmatrix}}_{\text{column}} * \underbrace{\begin{bmatrix}1&1&1\end{bmatrix}}_{\text{row}}$$

2D convolution with a separable filter is equivalent to two 1D convolutions (with the “column” and “row” filters).

Separable filters

A 2D filter is separable if it can be written as the product of a "column" and a "row".

example:
box filter

$$\begin{bmatrix} 1 & 1 & 1 \\ 1 & 1 & 1 \\ 1 & 1 & 1 \end{bmatrix} = \underbrace{\begin{bmatrix} 1 \\ 1 \\ 1 \end{bmatrix}}_{\text{column}} * \underbrace{\begin{bmatrix} 1 & 1 & 1 \end{bmatrix}}_{\text{row}}$$

2D convolution with a separable filter is equivalent to two 1D convolutions (with the "column" and "row" filters).

If the image has M x M pixels and the filter kernel has size N x N:
- What is the cost of convolution with a non-separable filter?

Separable filters

A 2D filter is separable if it can be written as the product of a “column” and a “row”.

example:
box filter

$$\begin{bmatrix} 1 & 1 & 1 \\ 1 & 1 & 1 \\ 1 & 1 & 1 \end{bmatrix} = \underbrace{\begin{bmatrix} 1 \\ 1 \\ 1 \end{bmatrix}}_{\text{column}} * \underbrace{\begin{bmatrix} 1 & 1 & 1 \end{bmatrix}}_{\text{row}}$$

2D convolution with a separable filter is equivalent to two 1D convolutions (with the “column” and “row” filters).

If the image has M x M pixels and the filter kernel has size N x N:

- What is the cost of convolution with a non-separable filter? $\longrightarrow$ $M^2 \times N^2$
- What is the cost of convolution with a separable filter?

Separable filters

A 2D filter is separable if it can be written as the product of a “column” and a “row”.

example: box filter

$$\begin{bmatrix} 1 & 1 & 1 \\ 1 & 1 & 1 \\ 1 & 1 & 1 \end{bmatrix} = \underbrace{\begin{bmatrix} 1 \\ 1 \\ 1 \end{bmatrix}}_{\text{column}} * \underbrace{\begin{bmatrix} 1 & 1 & 1 \end{bmatrix}}_{\text{row}}$$

2D convolution with a separable filter is equivalent to two 1D convolutions (with the “column” and “row” filters).

If the image has M x M pixels and the filter kernel has size N x N:

- What is the cost of convolution with a non-separable filter? $\longrightarrow$ $M^2 \times N^2$
- What is the cost of convolution with a separable filter? $\longrightarrow$ $2 \times N \times M^2$

A few more filters

original

3x3 box filter

do you see
any problems
in this image?

The Gaussian filter

- named (like many other things) after Carl Friedrich Gauss

- kernel values sampled from the 2D Gaussian function:

$$f(i,j) = \frac{1}{2\pi\sigma^2} e^{-\frac{i^2+j^2}{2\sigma^2}}$$

- weight falls off with distance from center pixel

- theoretically infinite, in practice truncated to some maximum distance

Any heuristics for selecting where to truncate?

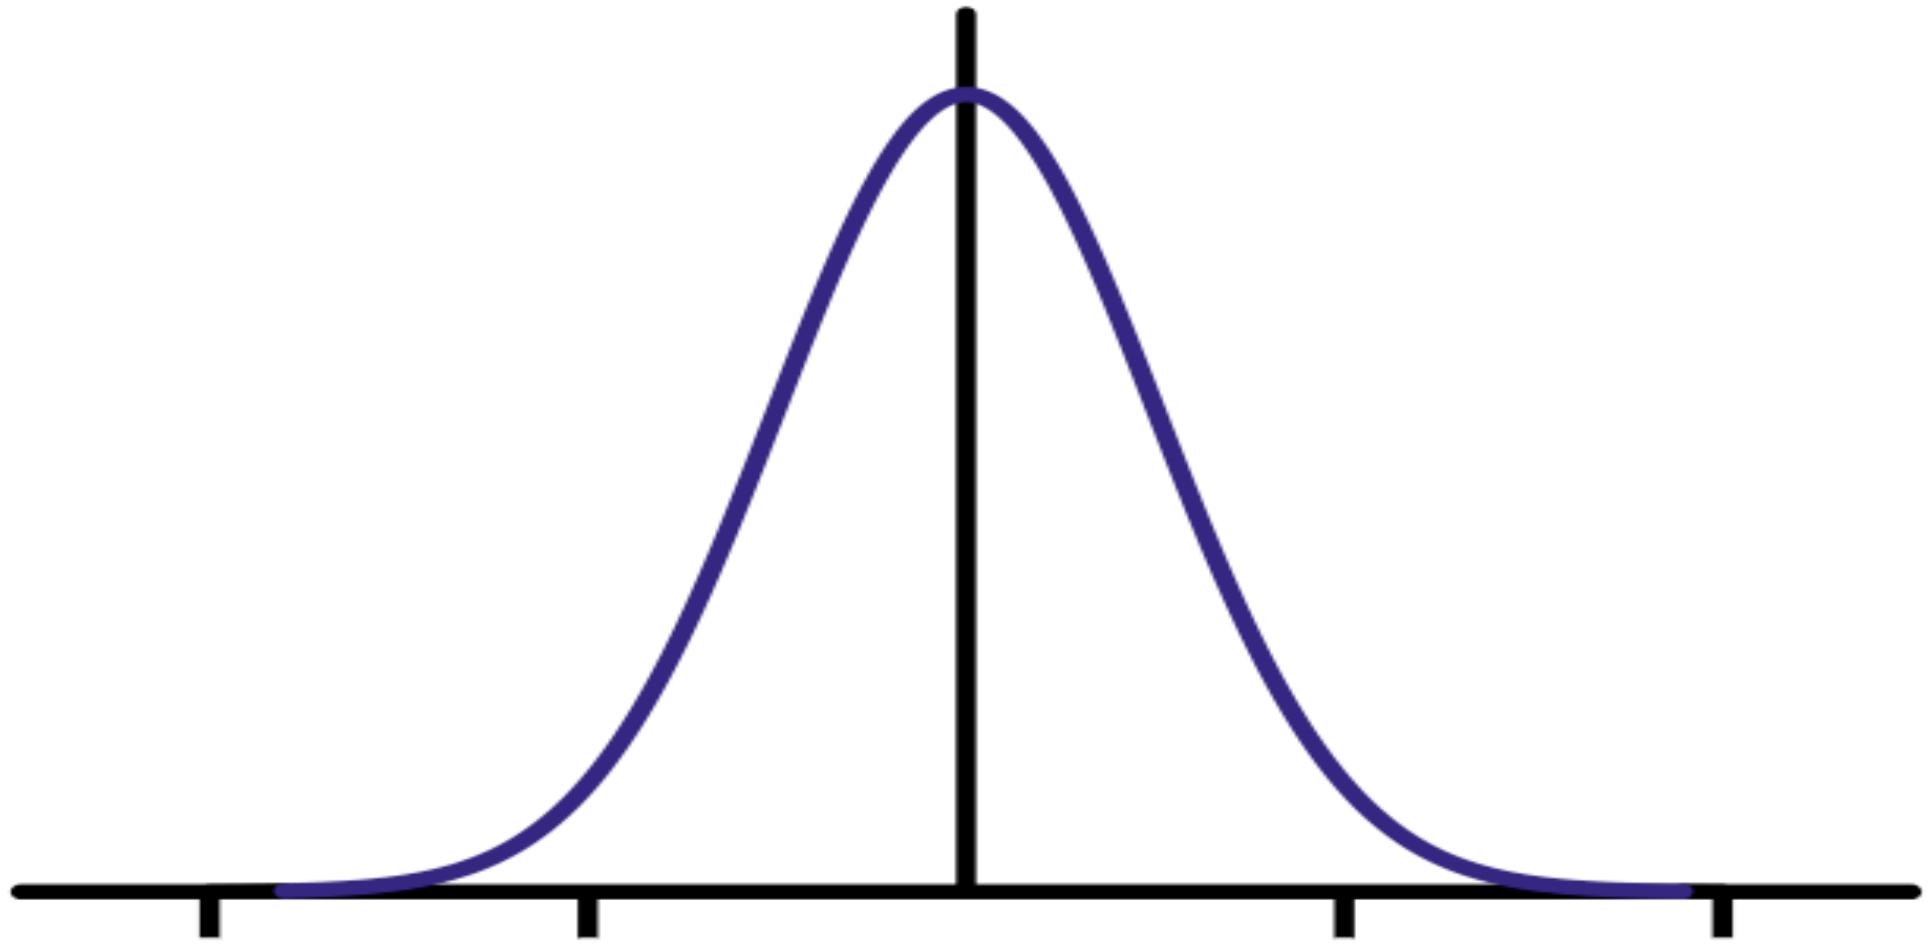

The Gaussian filter

- named (like many other things) after Carl Friedrich Gauss

- kernel values sampled from the 2D Gaussian function:

$$f(i,j) = \frac{1}{2\pi\sigma^2} e^{-\frac{i^2+j^2}{2\sigma^2}}$$

- weight falls off with distance from center pixel

- theoretically infinite, in practice truncated to some maximum distance

Any heuristics for selecting where to truncate?

- usually at 2-3σ

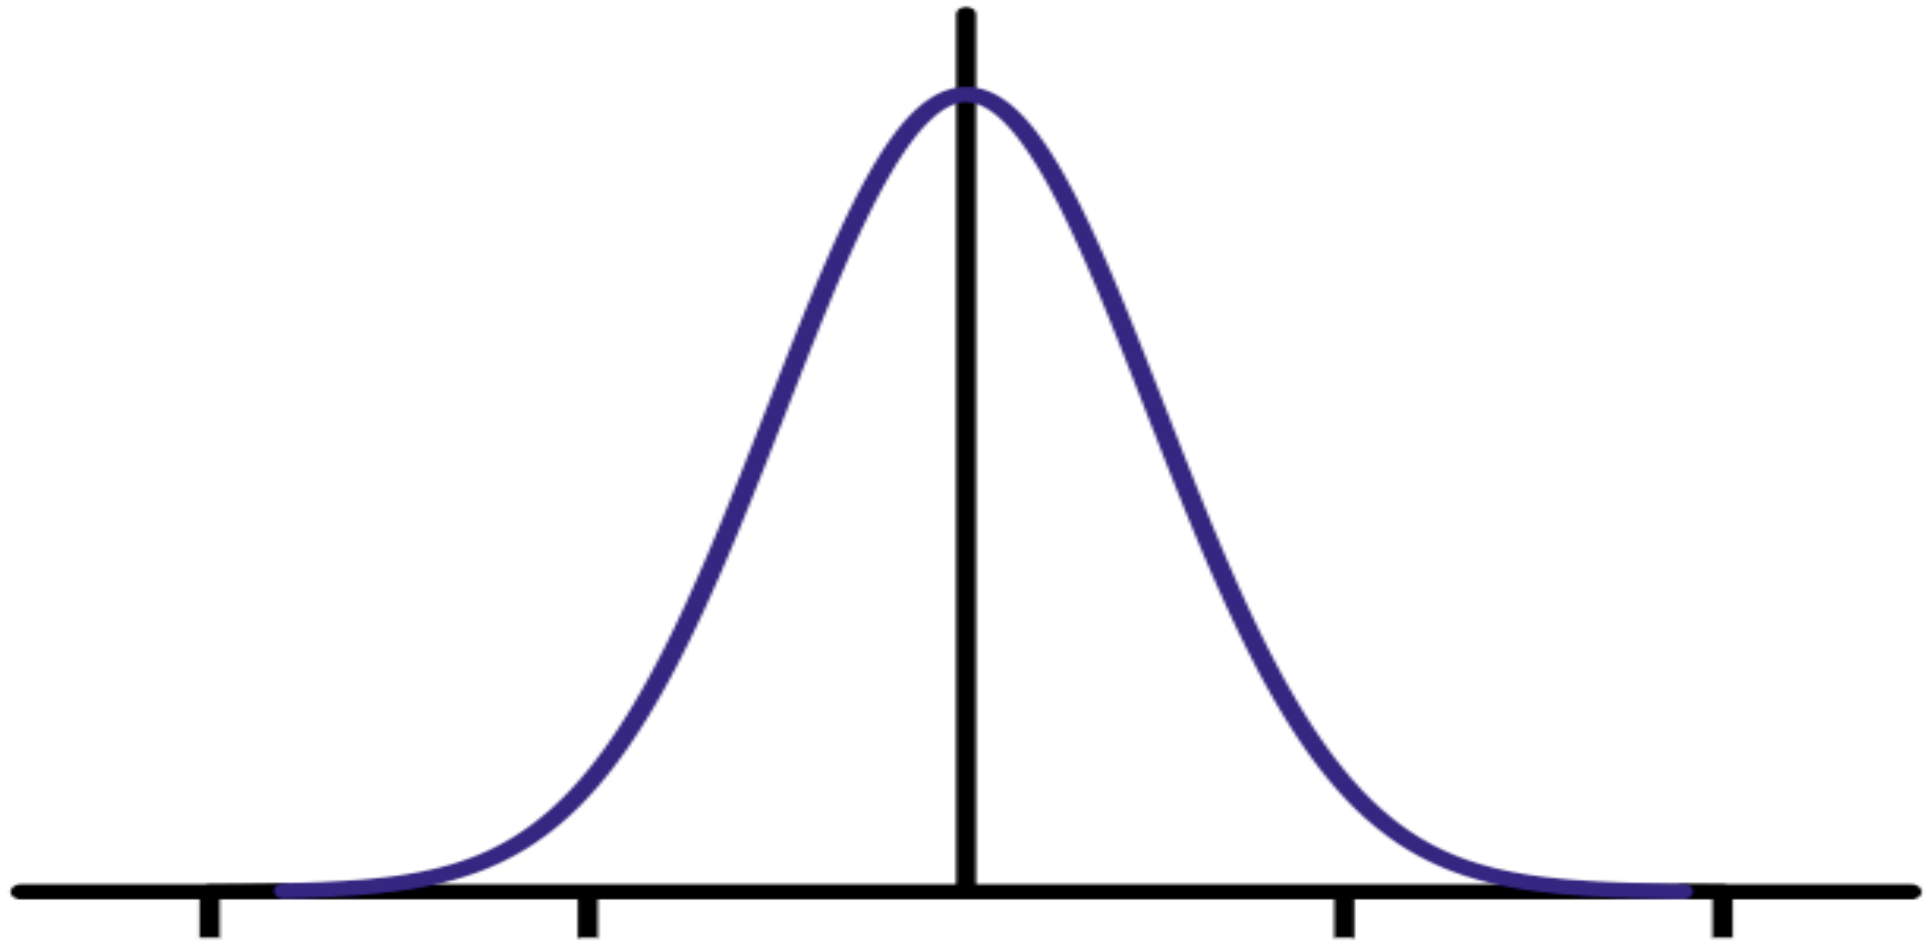

Is this a separable filter?

kernel $\frac{1}{16}\begin{array}{|c|c|c|}\hline 1 & 2 & 1 \\ \hline 2 & 4 & 2 \\ \hline 1 & 2 & 1 \\ \hline\end{array}$

The Gaussian filter

- named (like many other things) after Carl Friedrich Gauss

- kernel values sampled from the 2D Gaussian function:

$$f(i,j) = \frac{1}{2\pi\sigma^2} e^{-\frac{i^2+j^2}{2\sigma^2}}$$

- weight falls off with distance from center pixel

- theoretically infinite, in practice truncated to some maximum distance

Any heuristics for selecting where to truncate?

- usually at 2-3σ

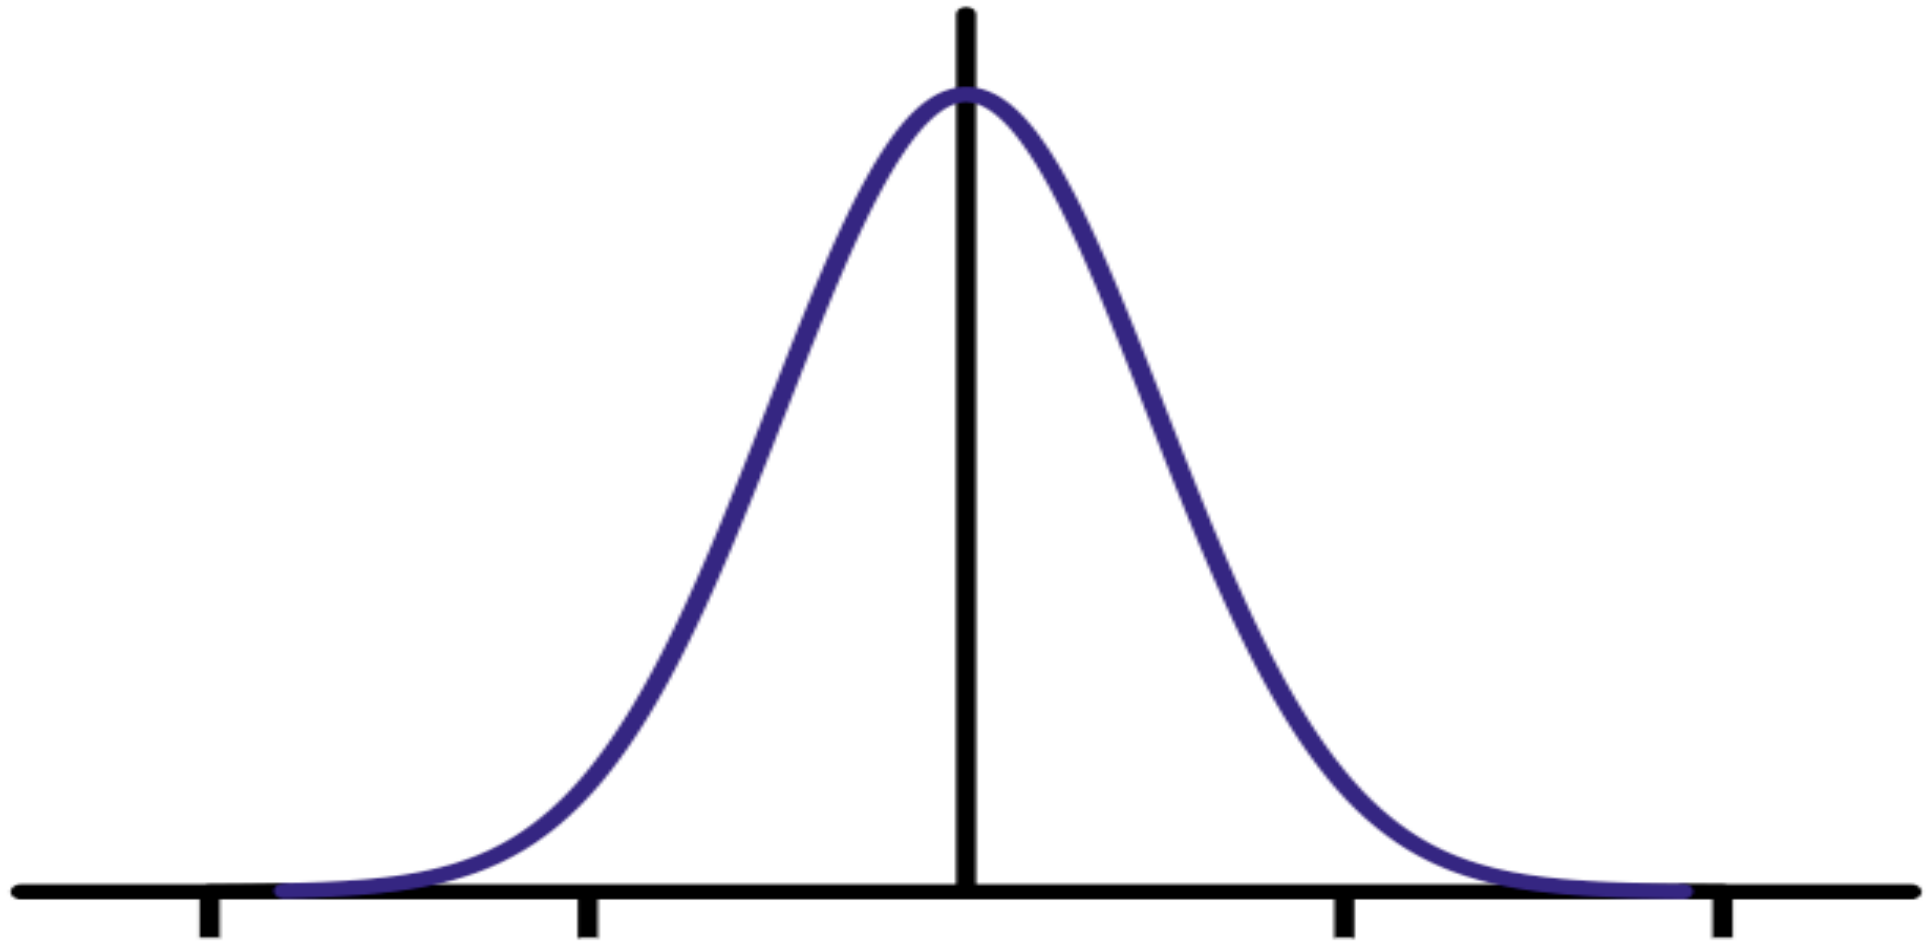

Is this a separable filter? Yes!

kernel $\frac{1}{16}\begin{array}{|c|c|c|}\hline 1 & 2 & 1 \\ \hline 2 & 4 & 2 \\ \hline 1 & 2 & 1 \\ \hline\end{array}$

Gaussian filtering example

Gaussian vs box filtering

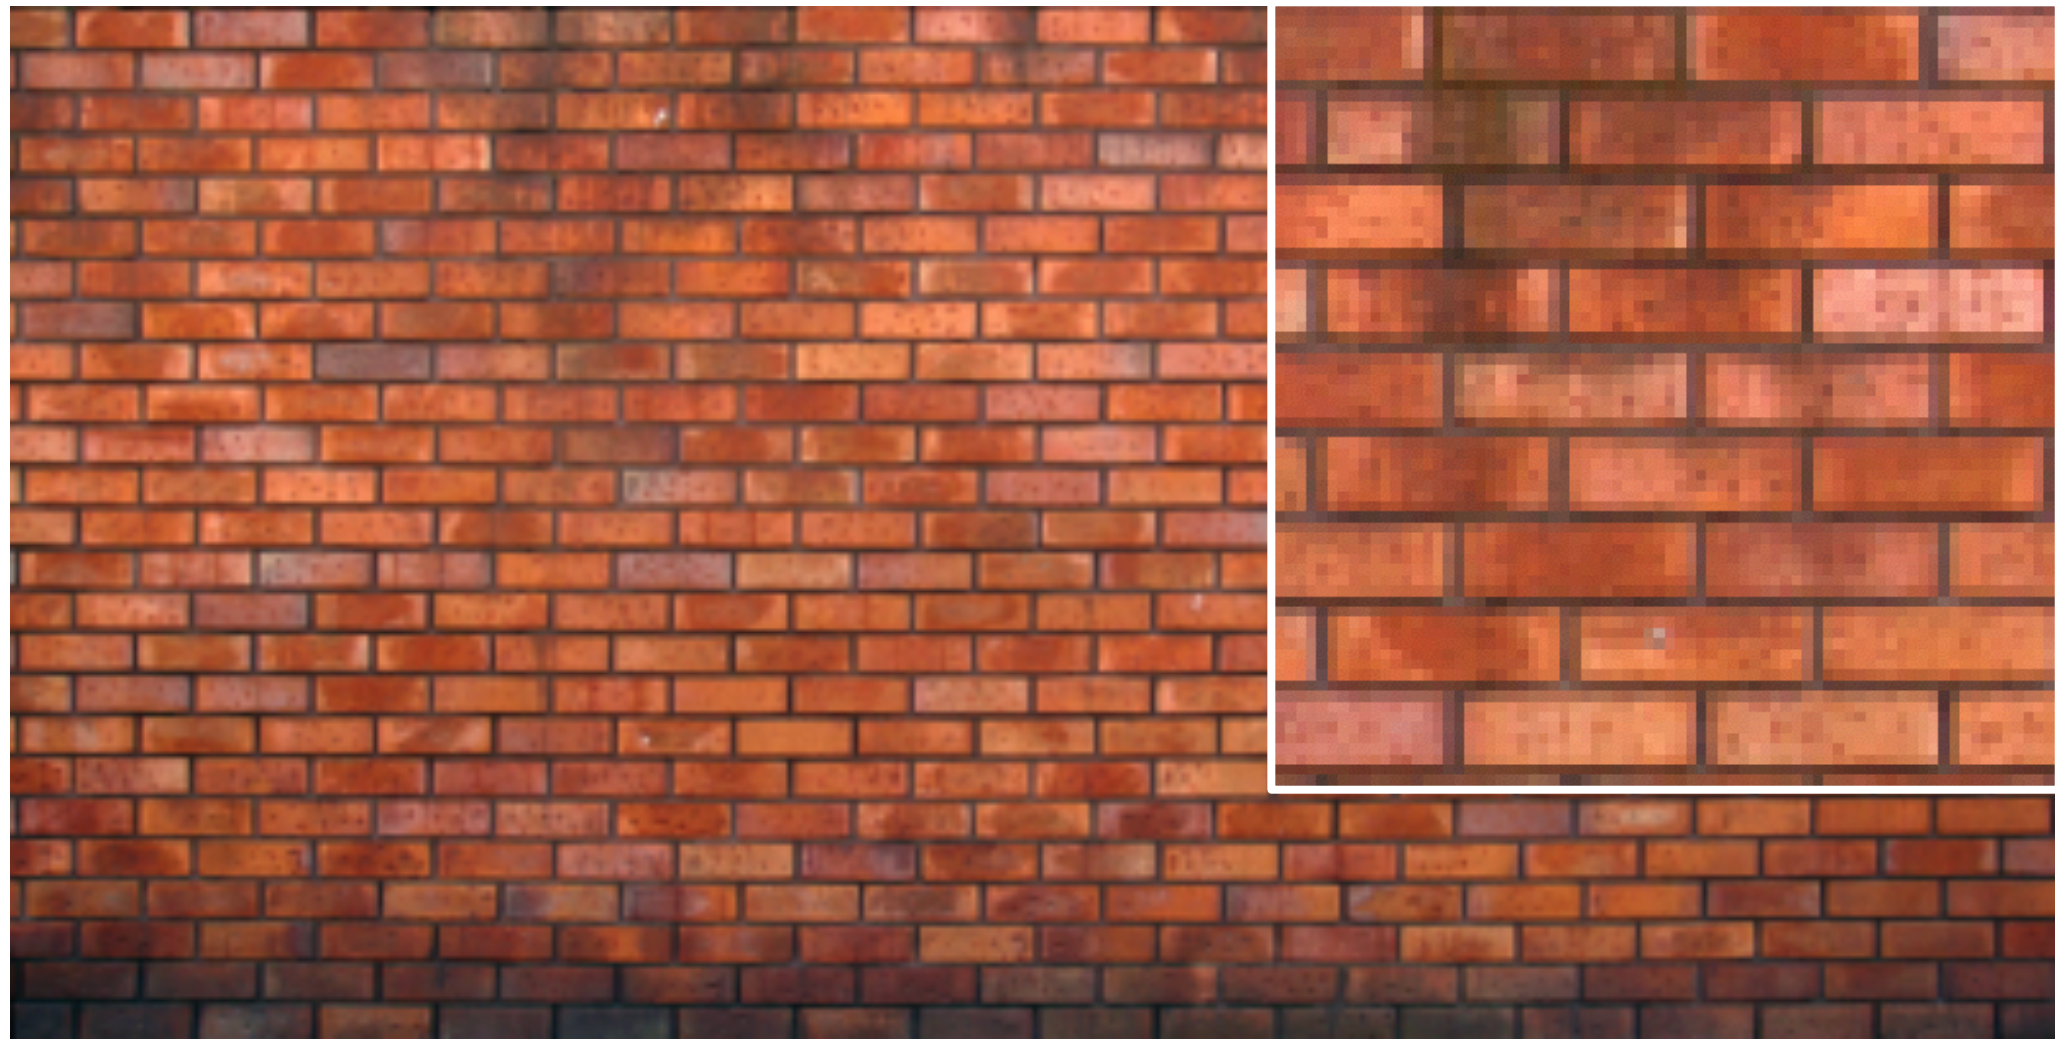

original

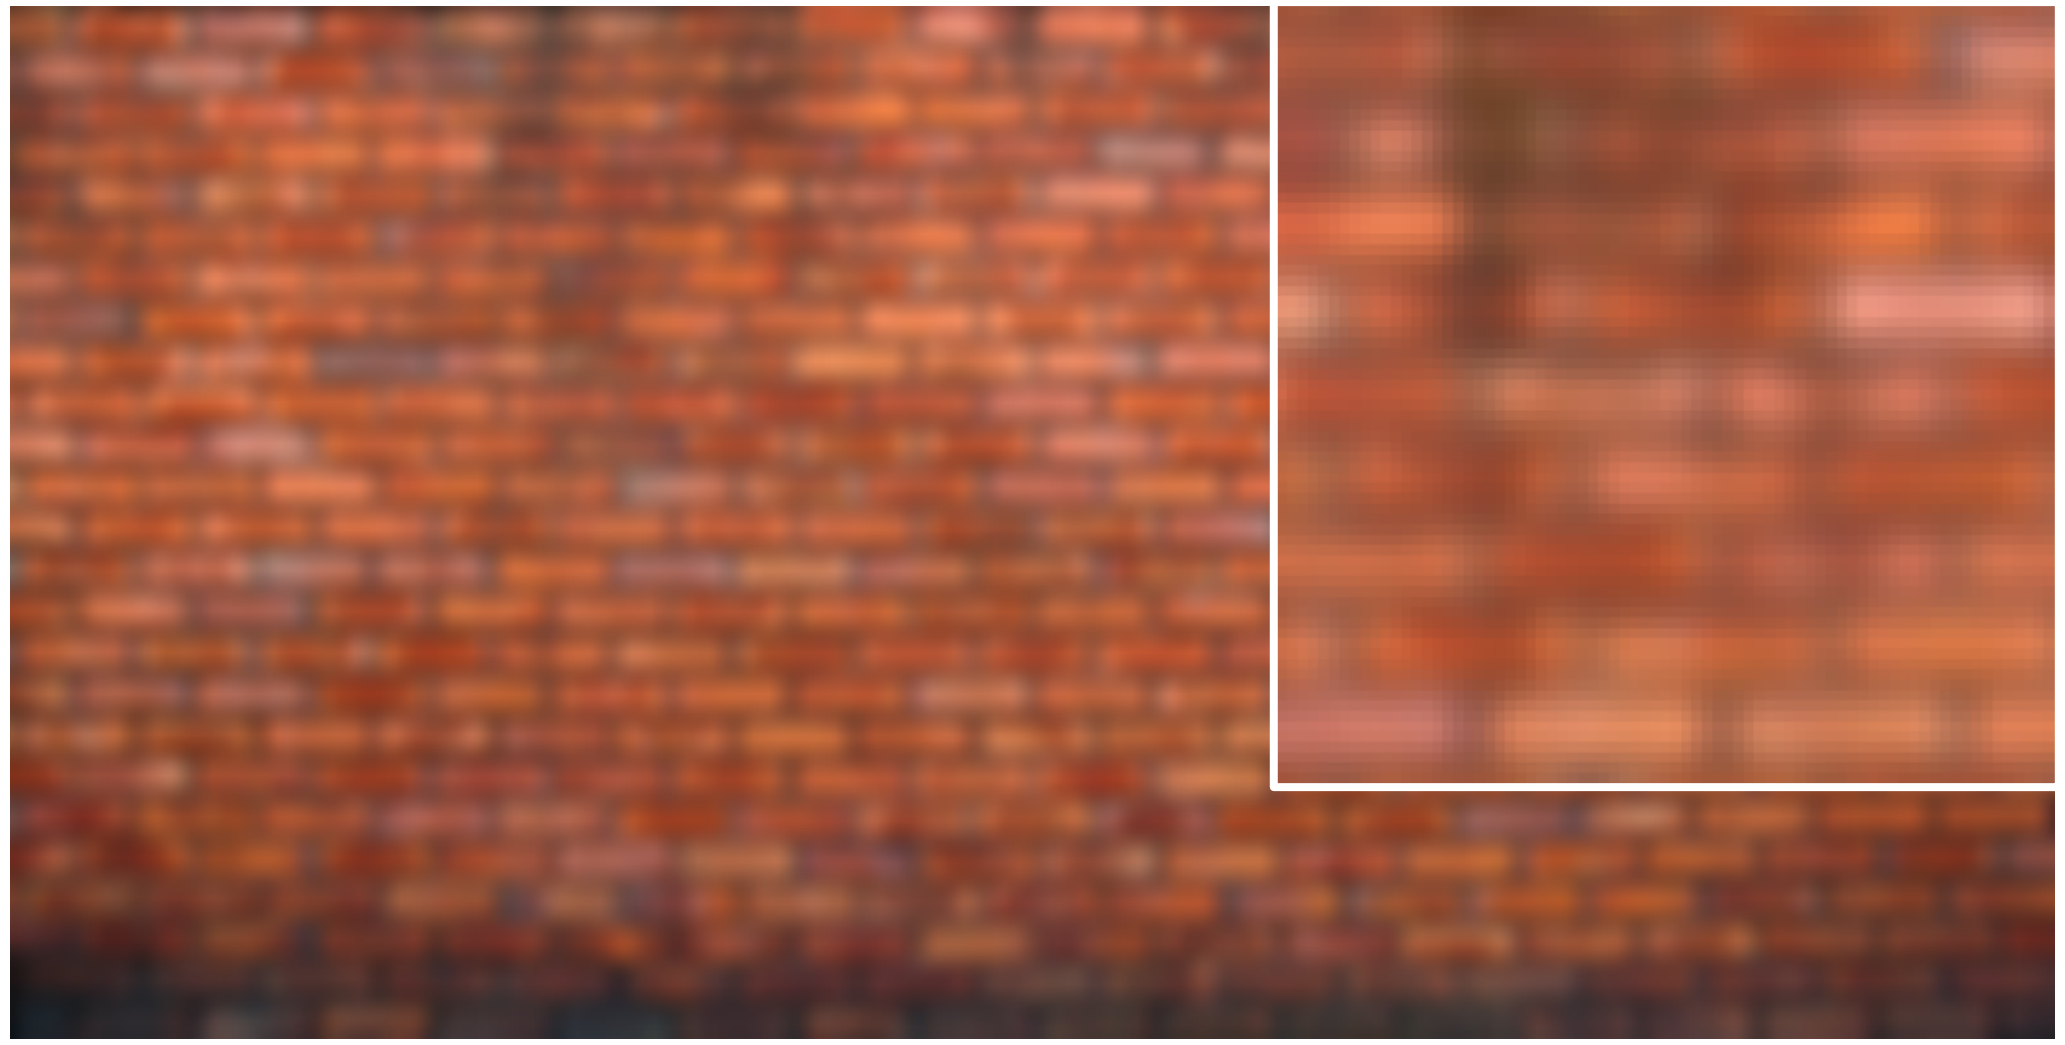

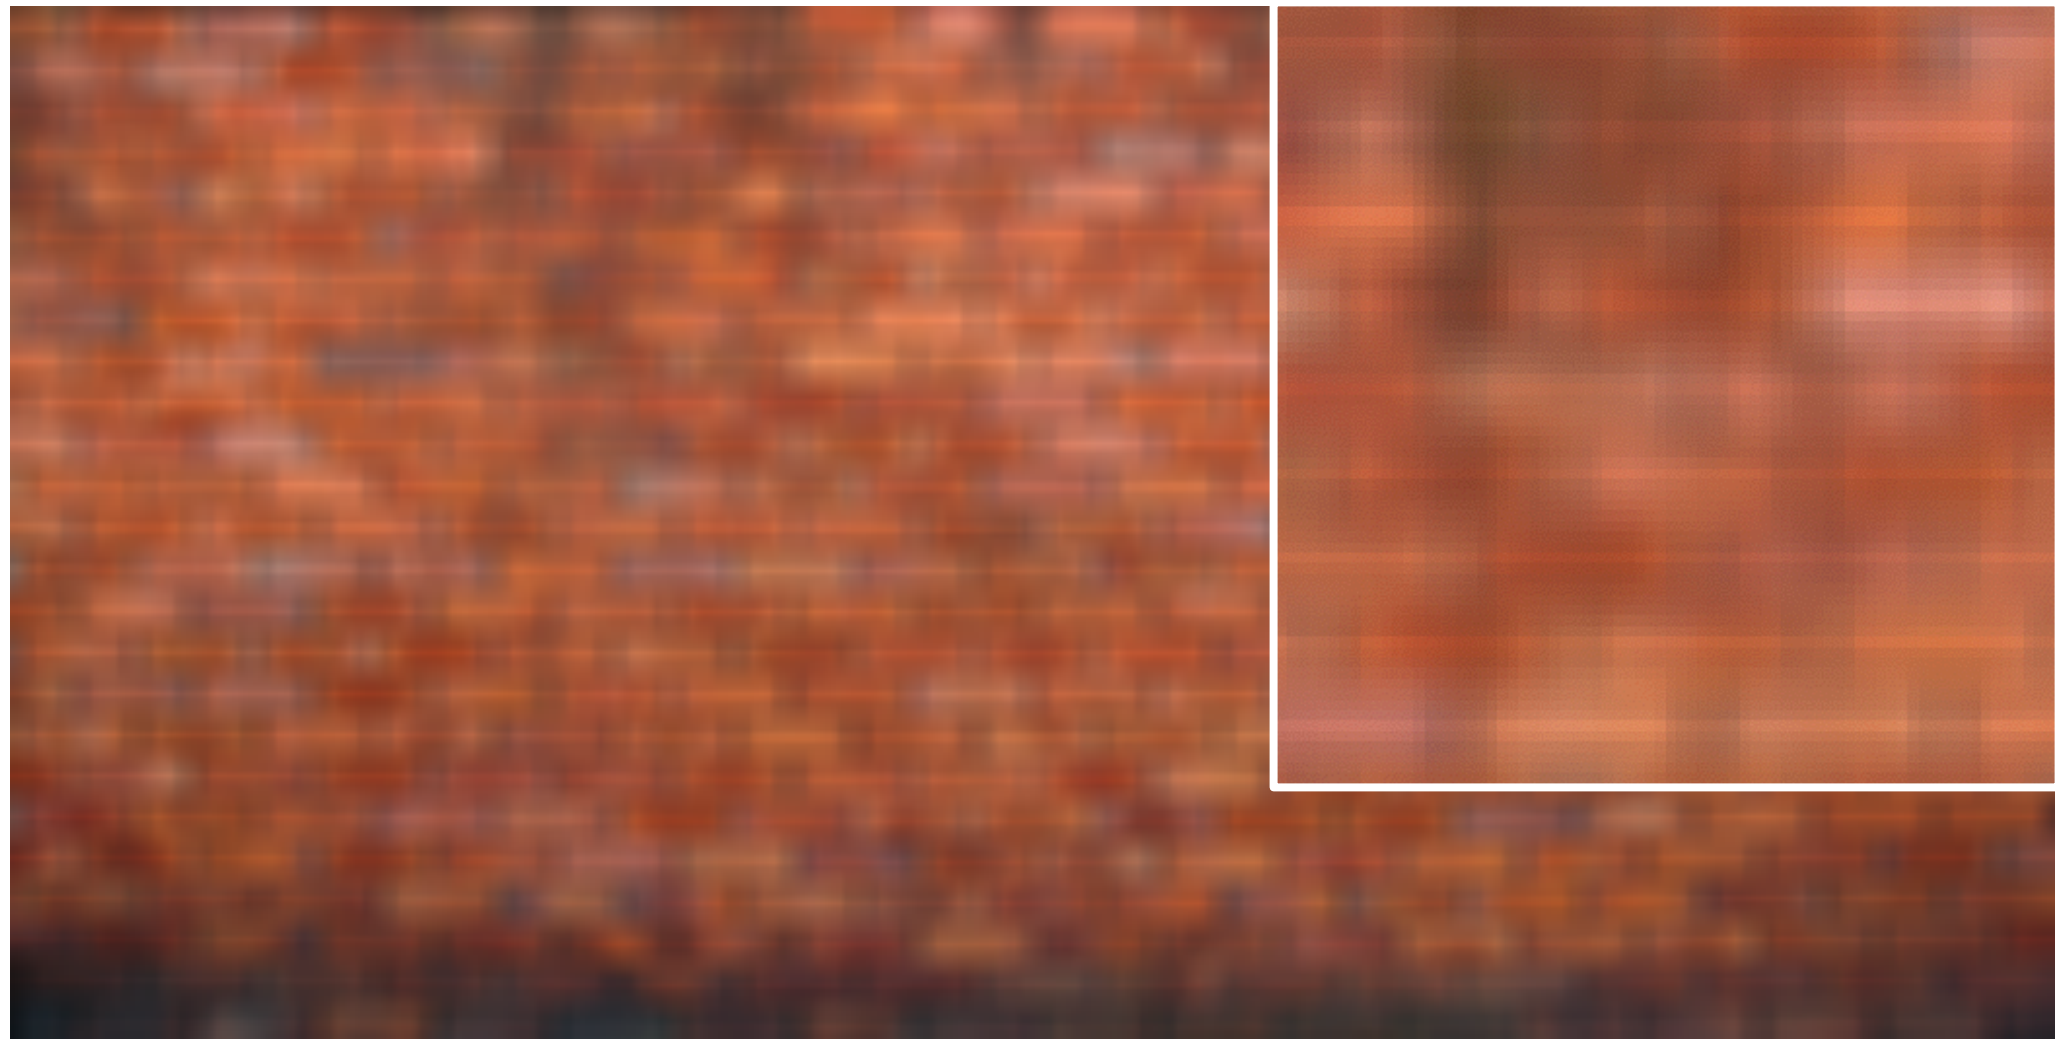

Which blur do you like better?

Gaussian vs box filtering

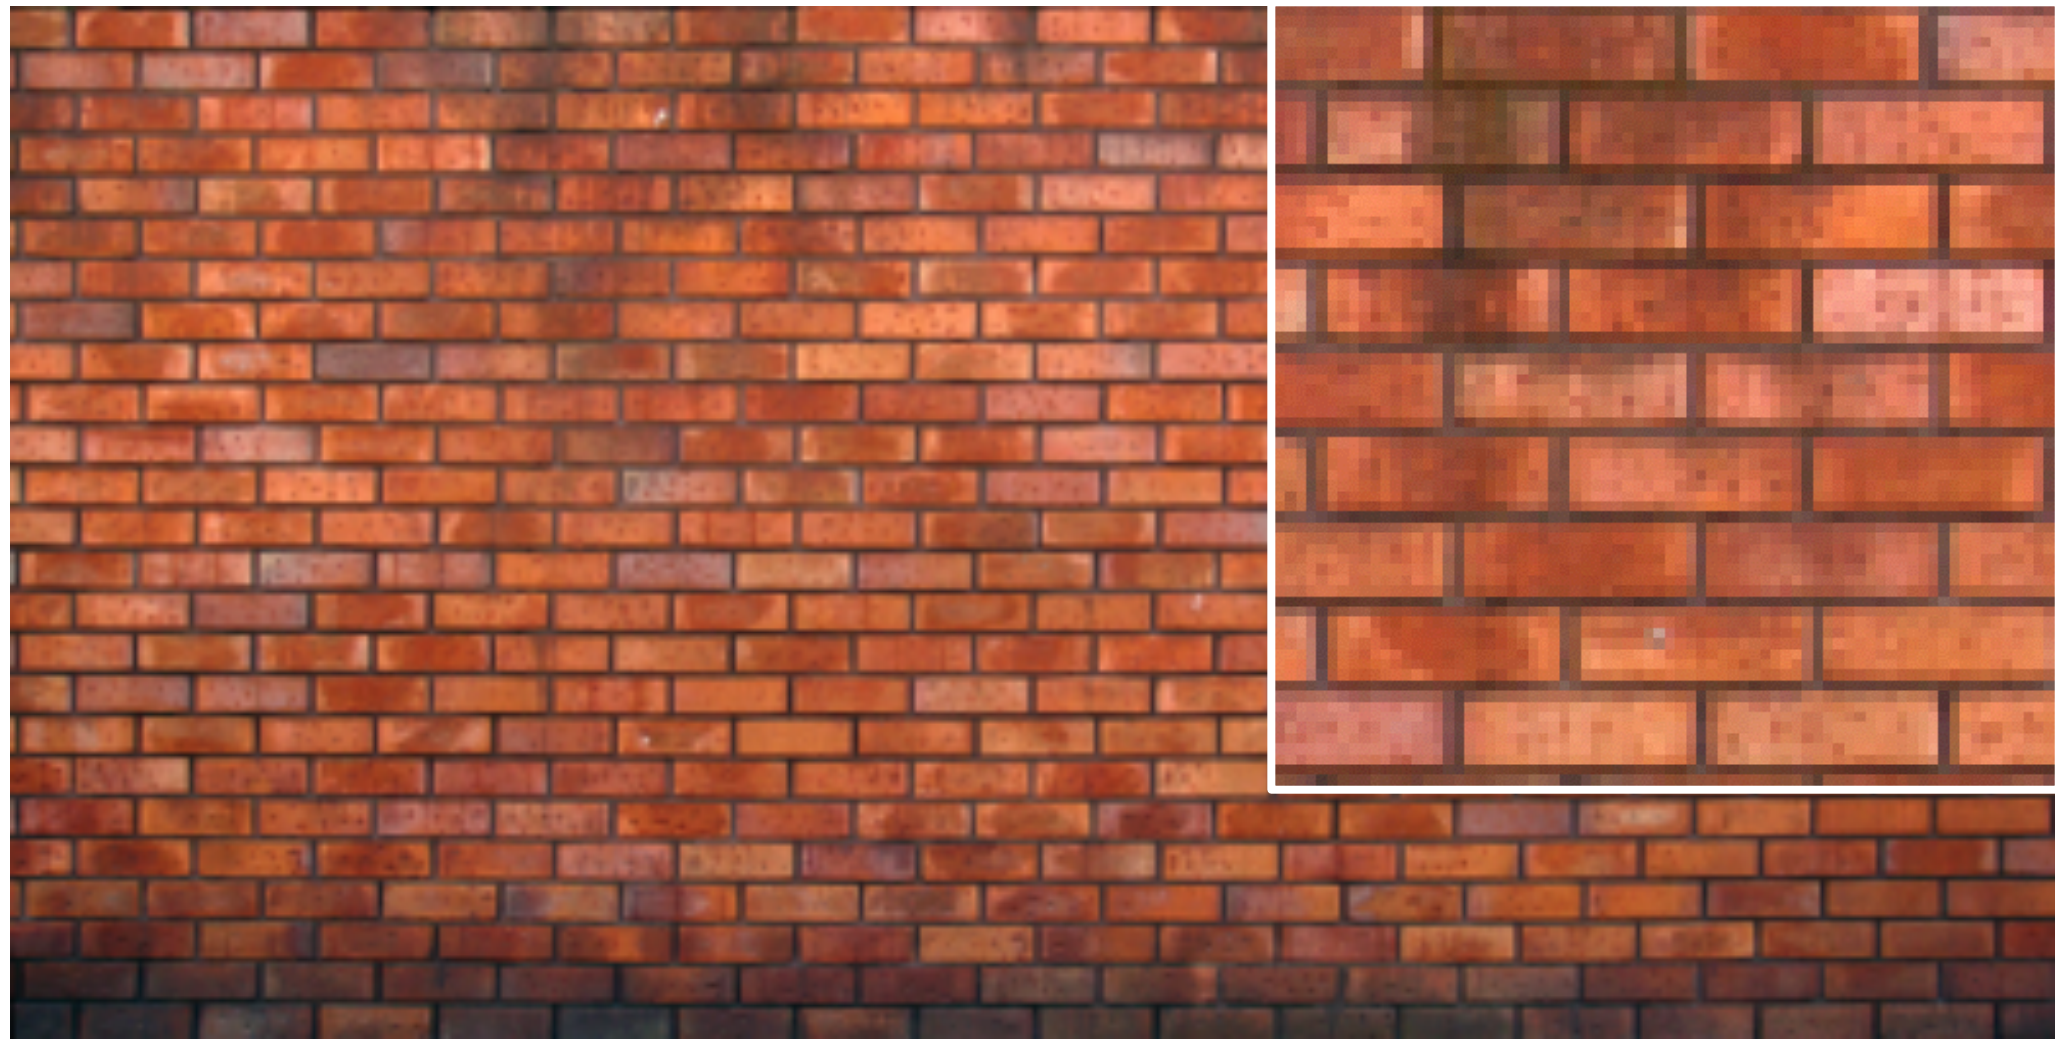
original

Which blur do you like better?

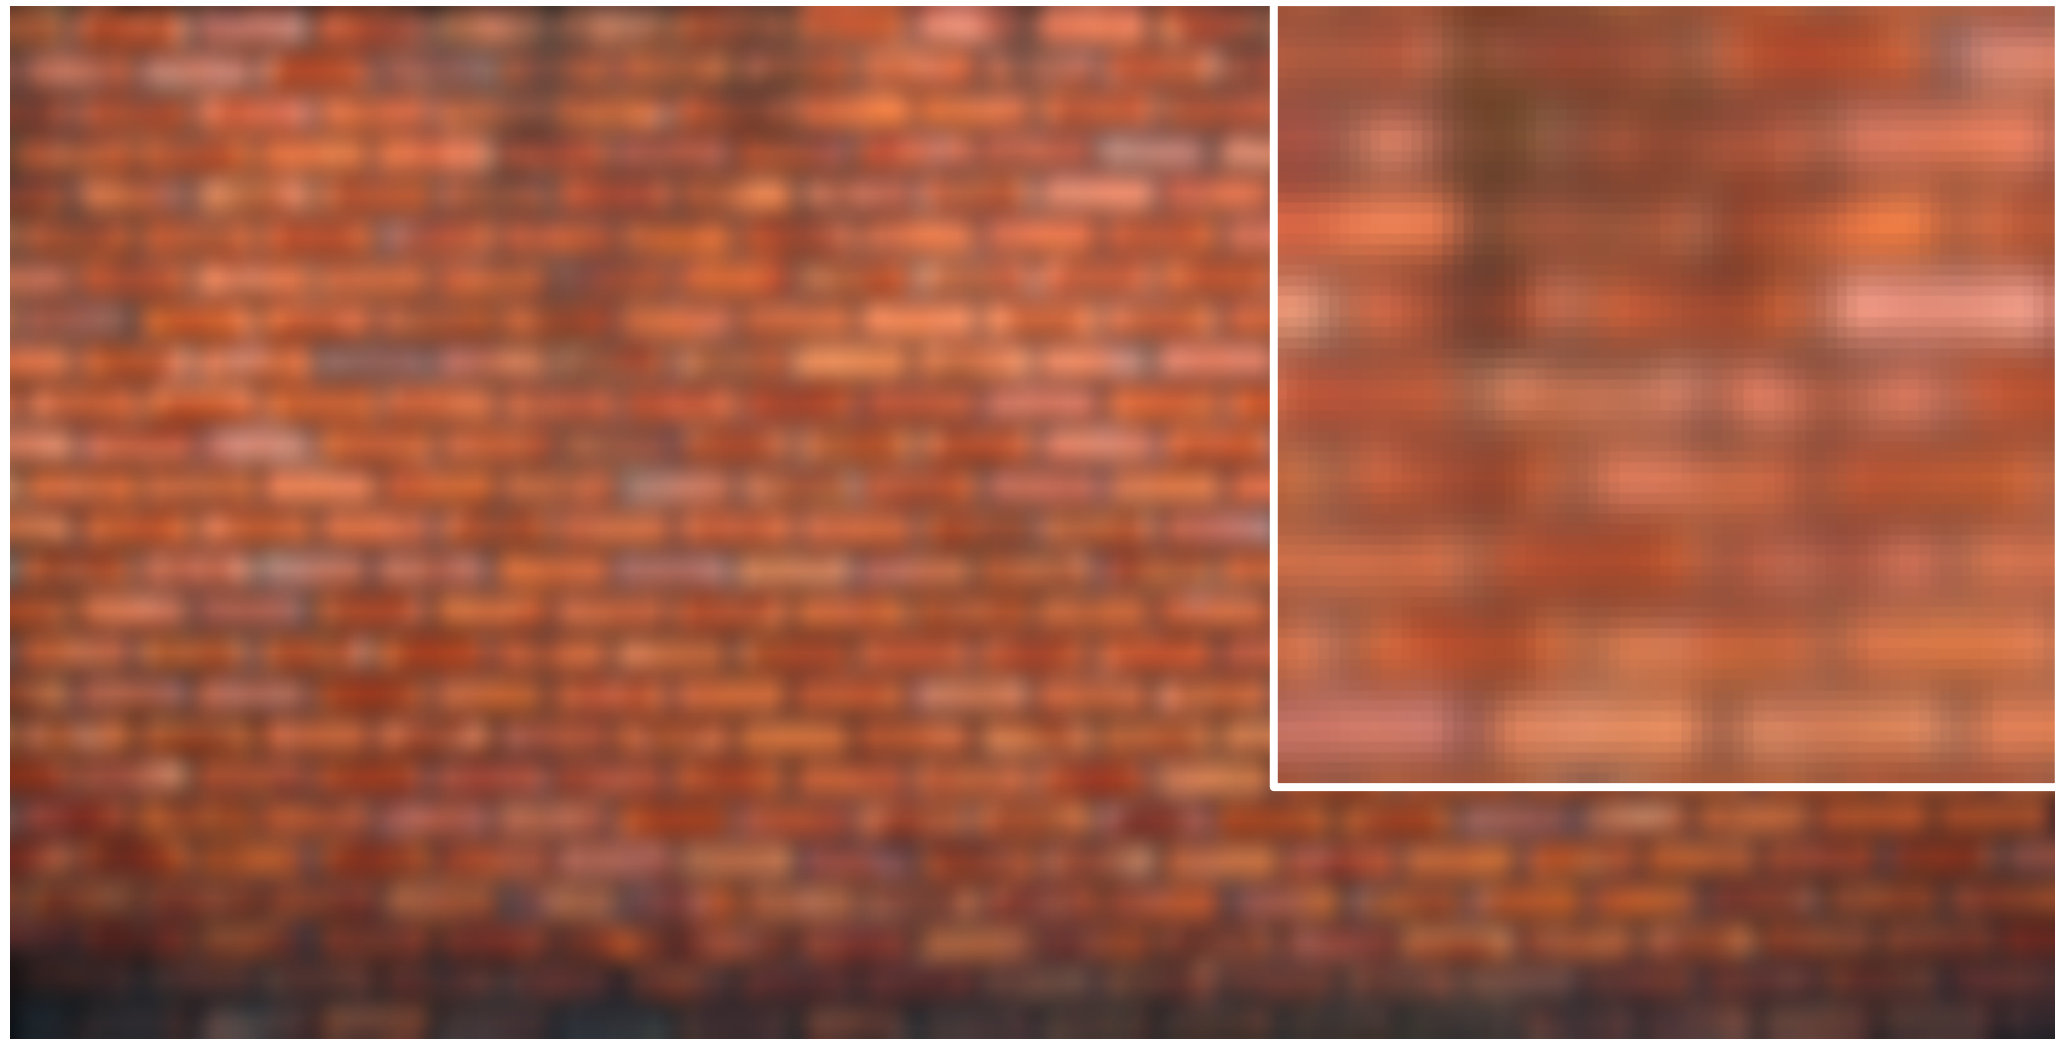
7x7 Gaussian

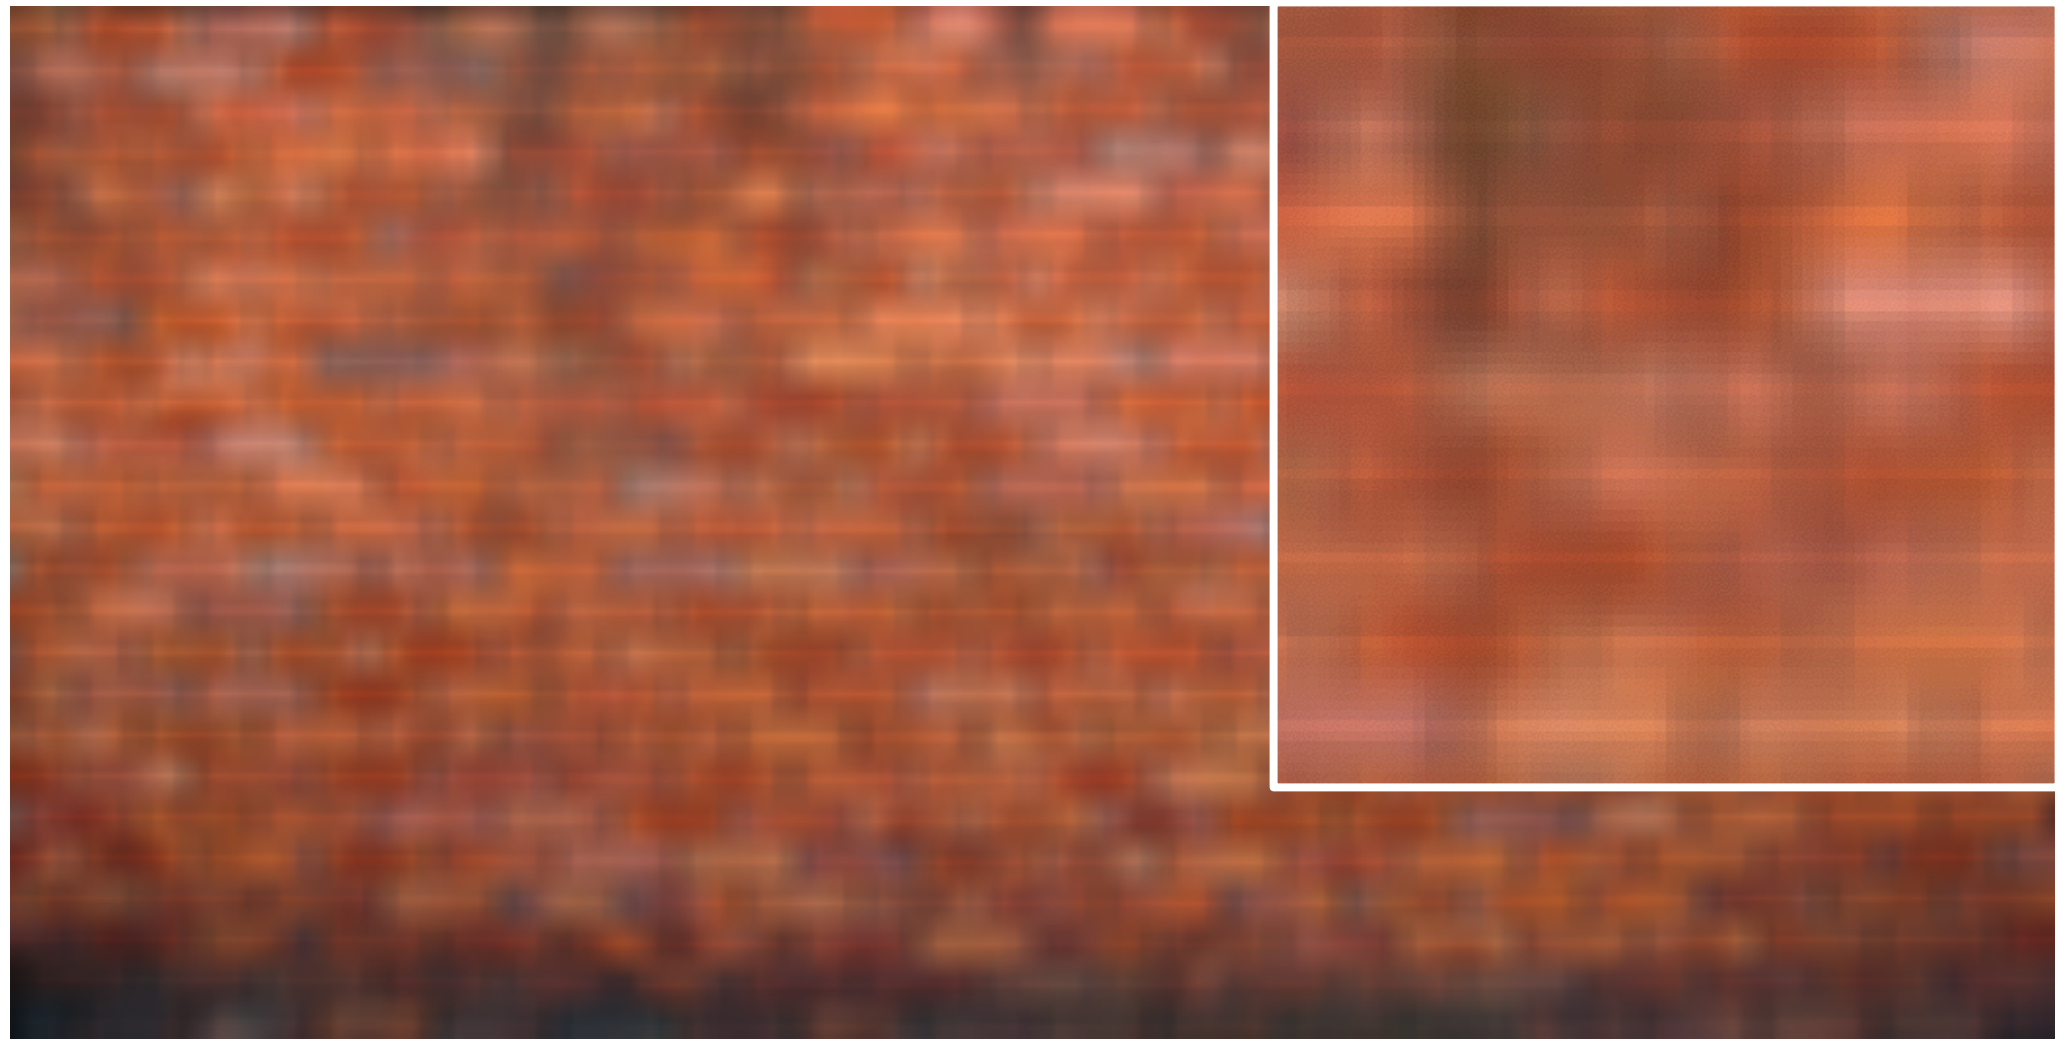
7x7 box

How would you create a soft shadow effect?

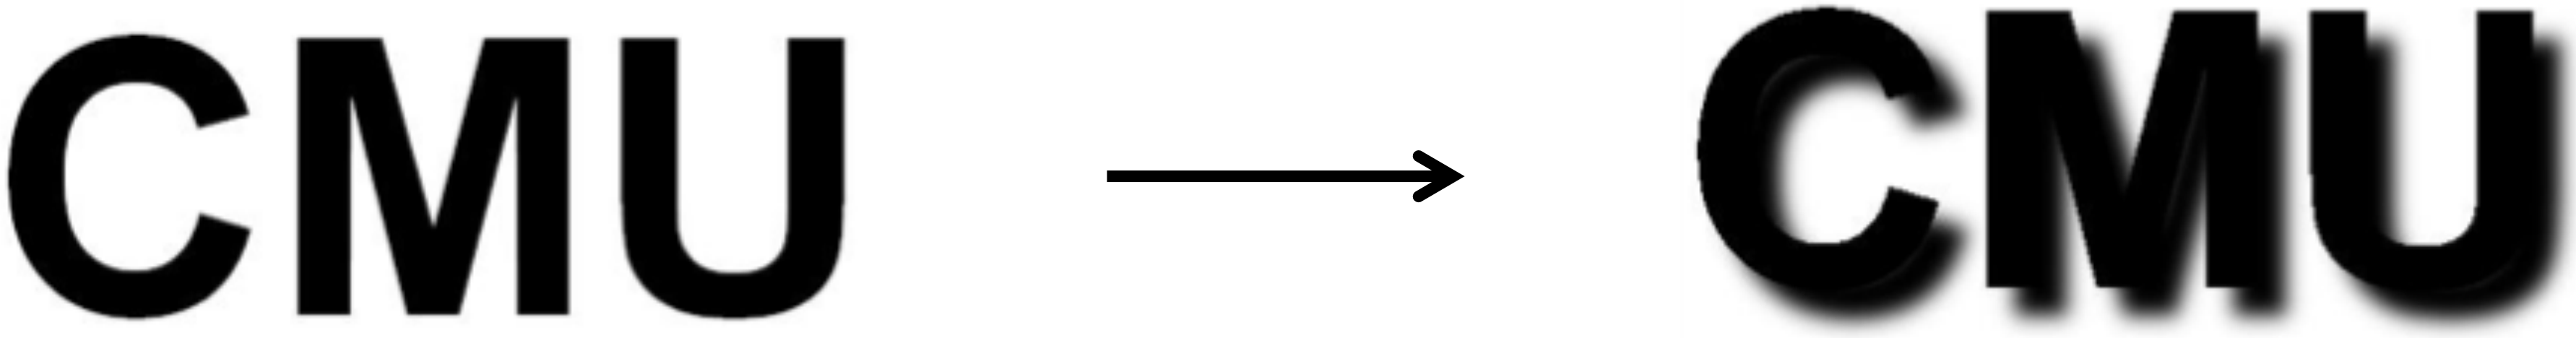

How would you create a soft shadow effect?

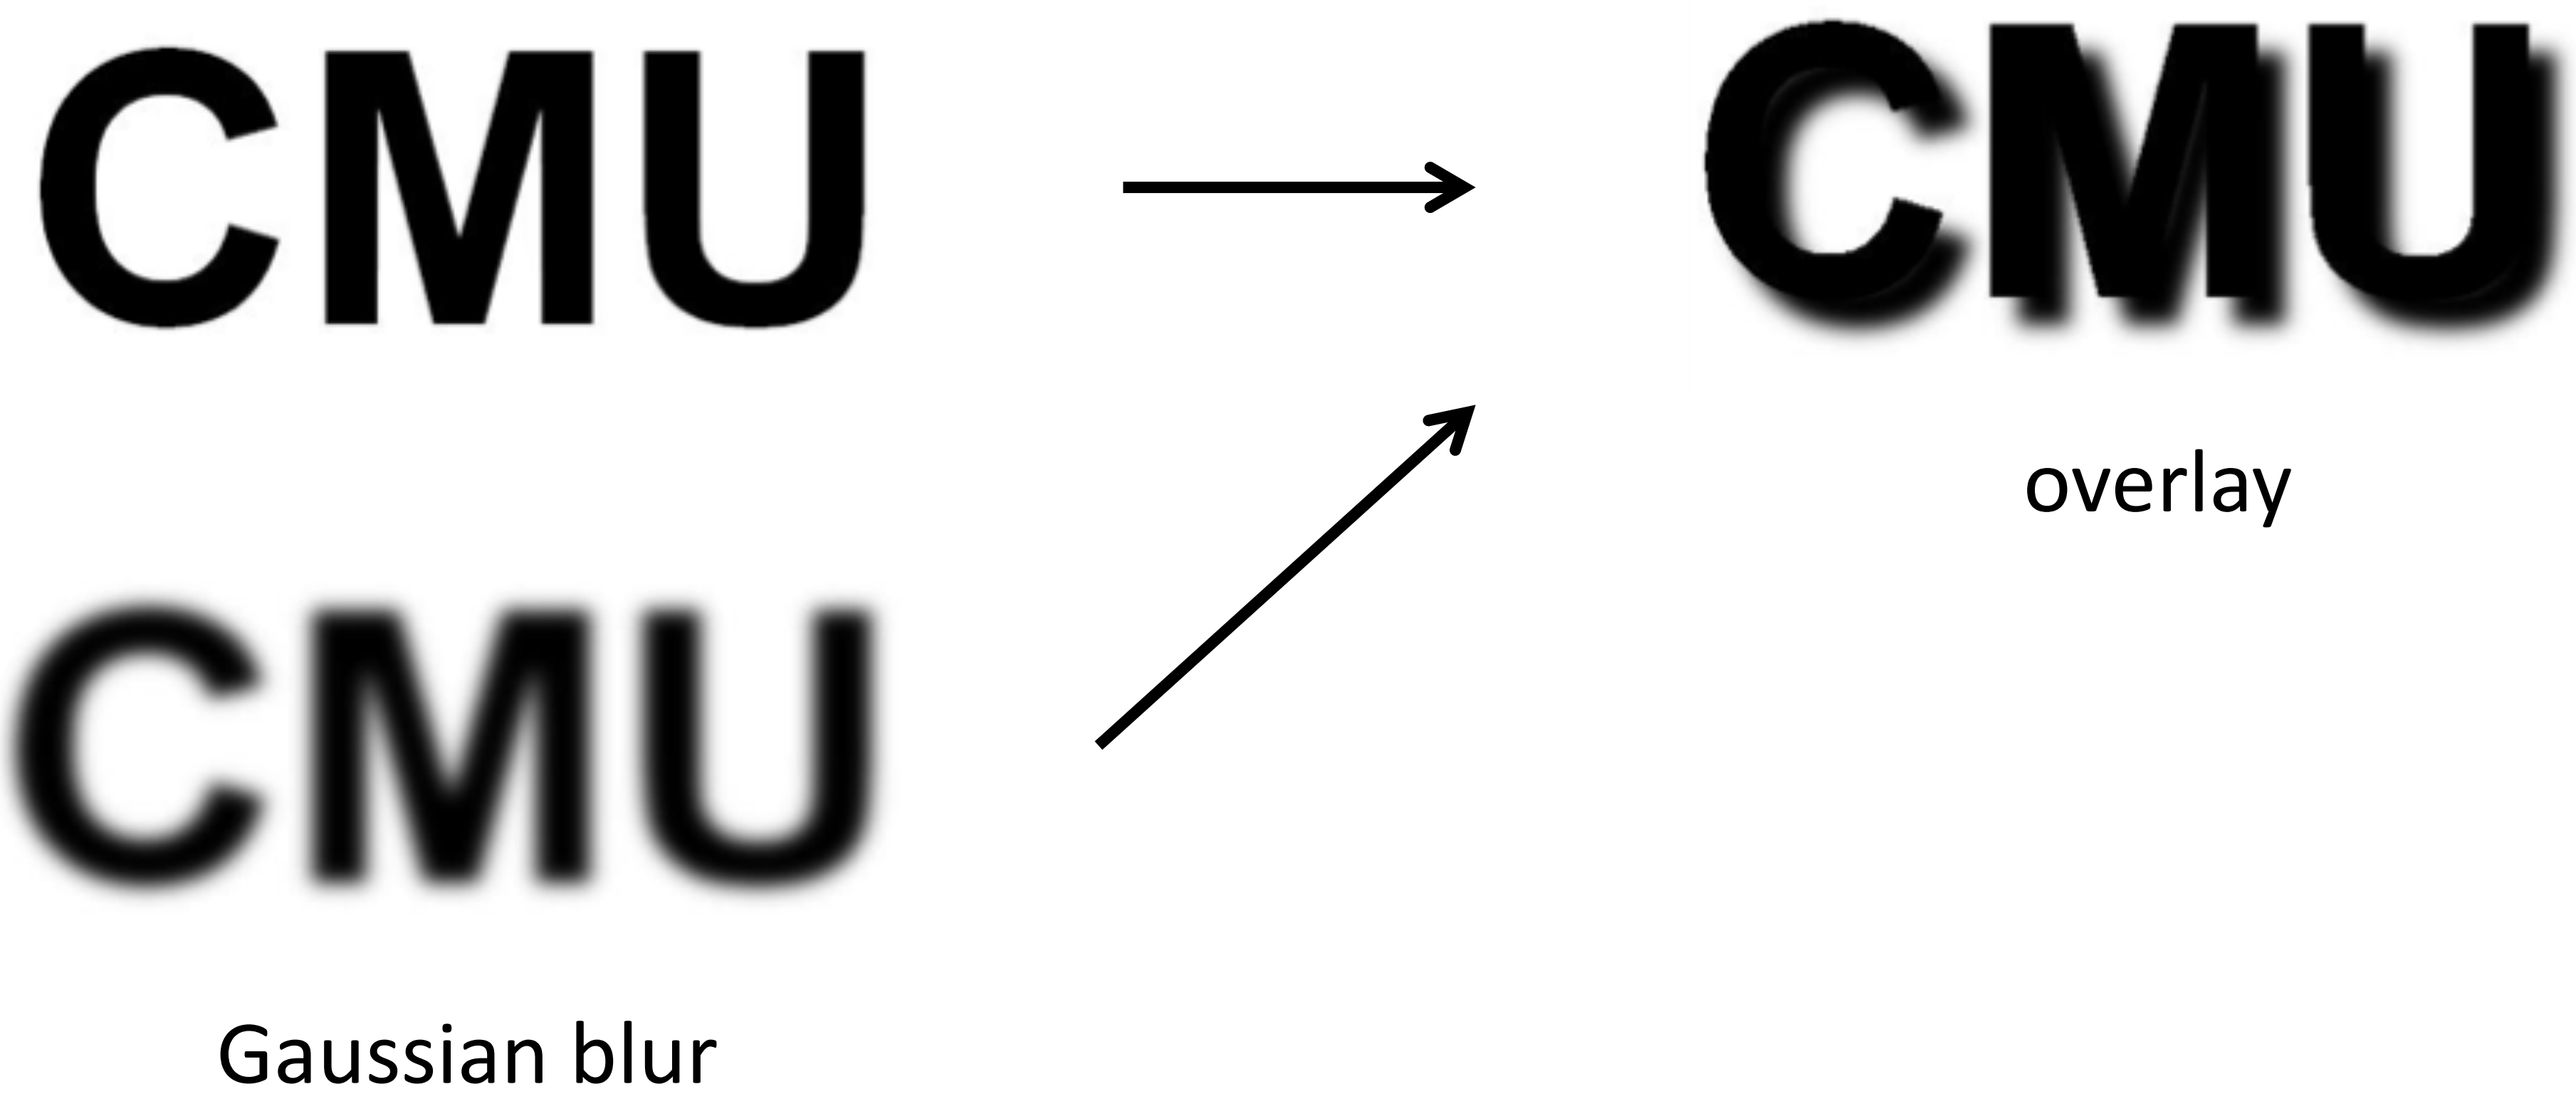

Other filters

input

filter

0	0	0
0	1	0
0	0	0

output

?

Other filters

input

filter

0	0	0
0	1	0
0	0	0

output

unchanged

Other filters

input

filter

0	0	0
0	1	0
0	0	0

output

unchanged

input

filter

0	0	0
0	0	1
0	0	0

output

?

Other filters

input

filter

0	0	0
0	1	0
0	0	0

output

unchanged

input

filter

0	0	0
0	0	1
0	0	0

output



shift to left
by one

Other filters

input	filter	output
	$\begin{bmatrix} 0 & 0 & 0 \\ 0 & 2 & 0 \\ 0 & 0 & 0 \end{bmatrix} - \frac{1}{9} \begin{bmatrix} 1 & 1 & 1 \\ 1 & 1 & 1 \\ 1 & 1 & 1 \end{bmatrix}$	**?**

Other filters

input

filter

$$\begin{bmatrix} 0 & 0 & 0 \\ 0 & 2 & 0 \\ 0 & 0 & 0 \end{bmatrix} - \frac{1}{9} \begin{bmatrix} 1 & 1 & 1 \\ 1 & 1 & 1 \\ 1 & 1 & 1 \end{bmatrix}$$

output

sharpening

- do nothing for flat areas
- stress intensity peaks

Sharpening examples

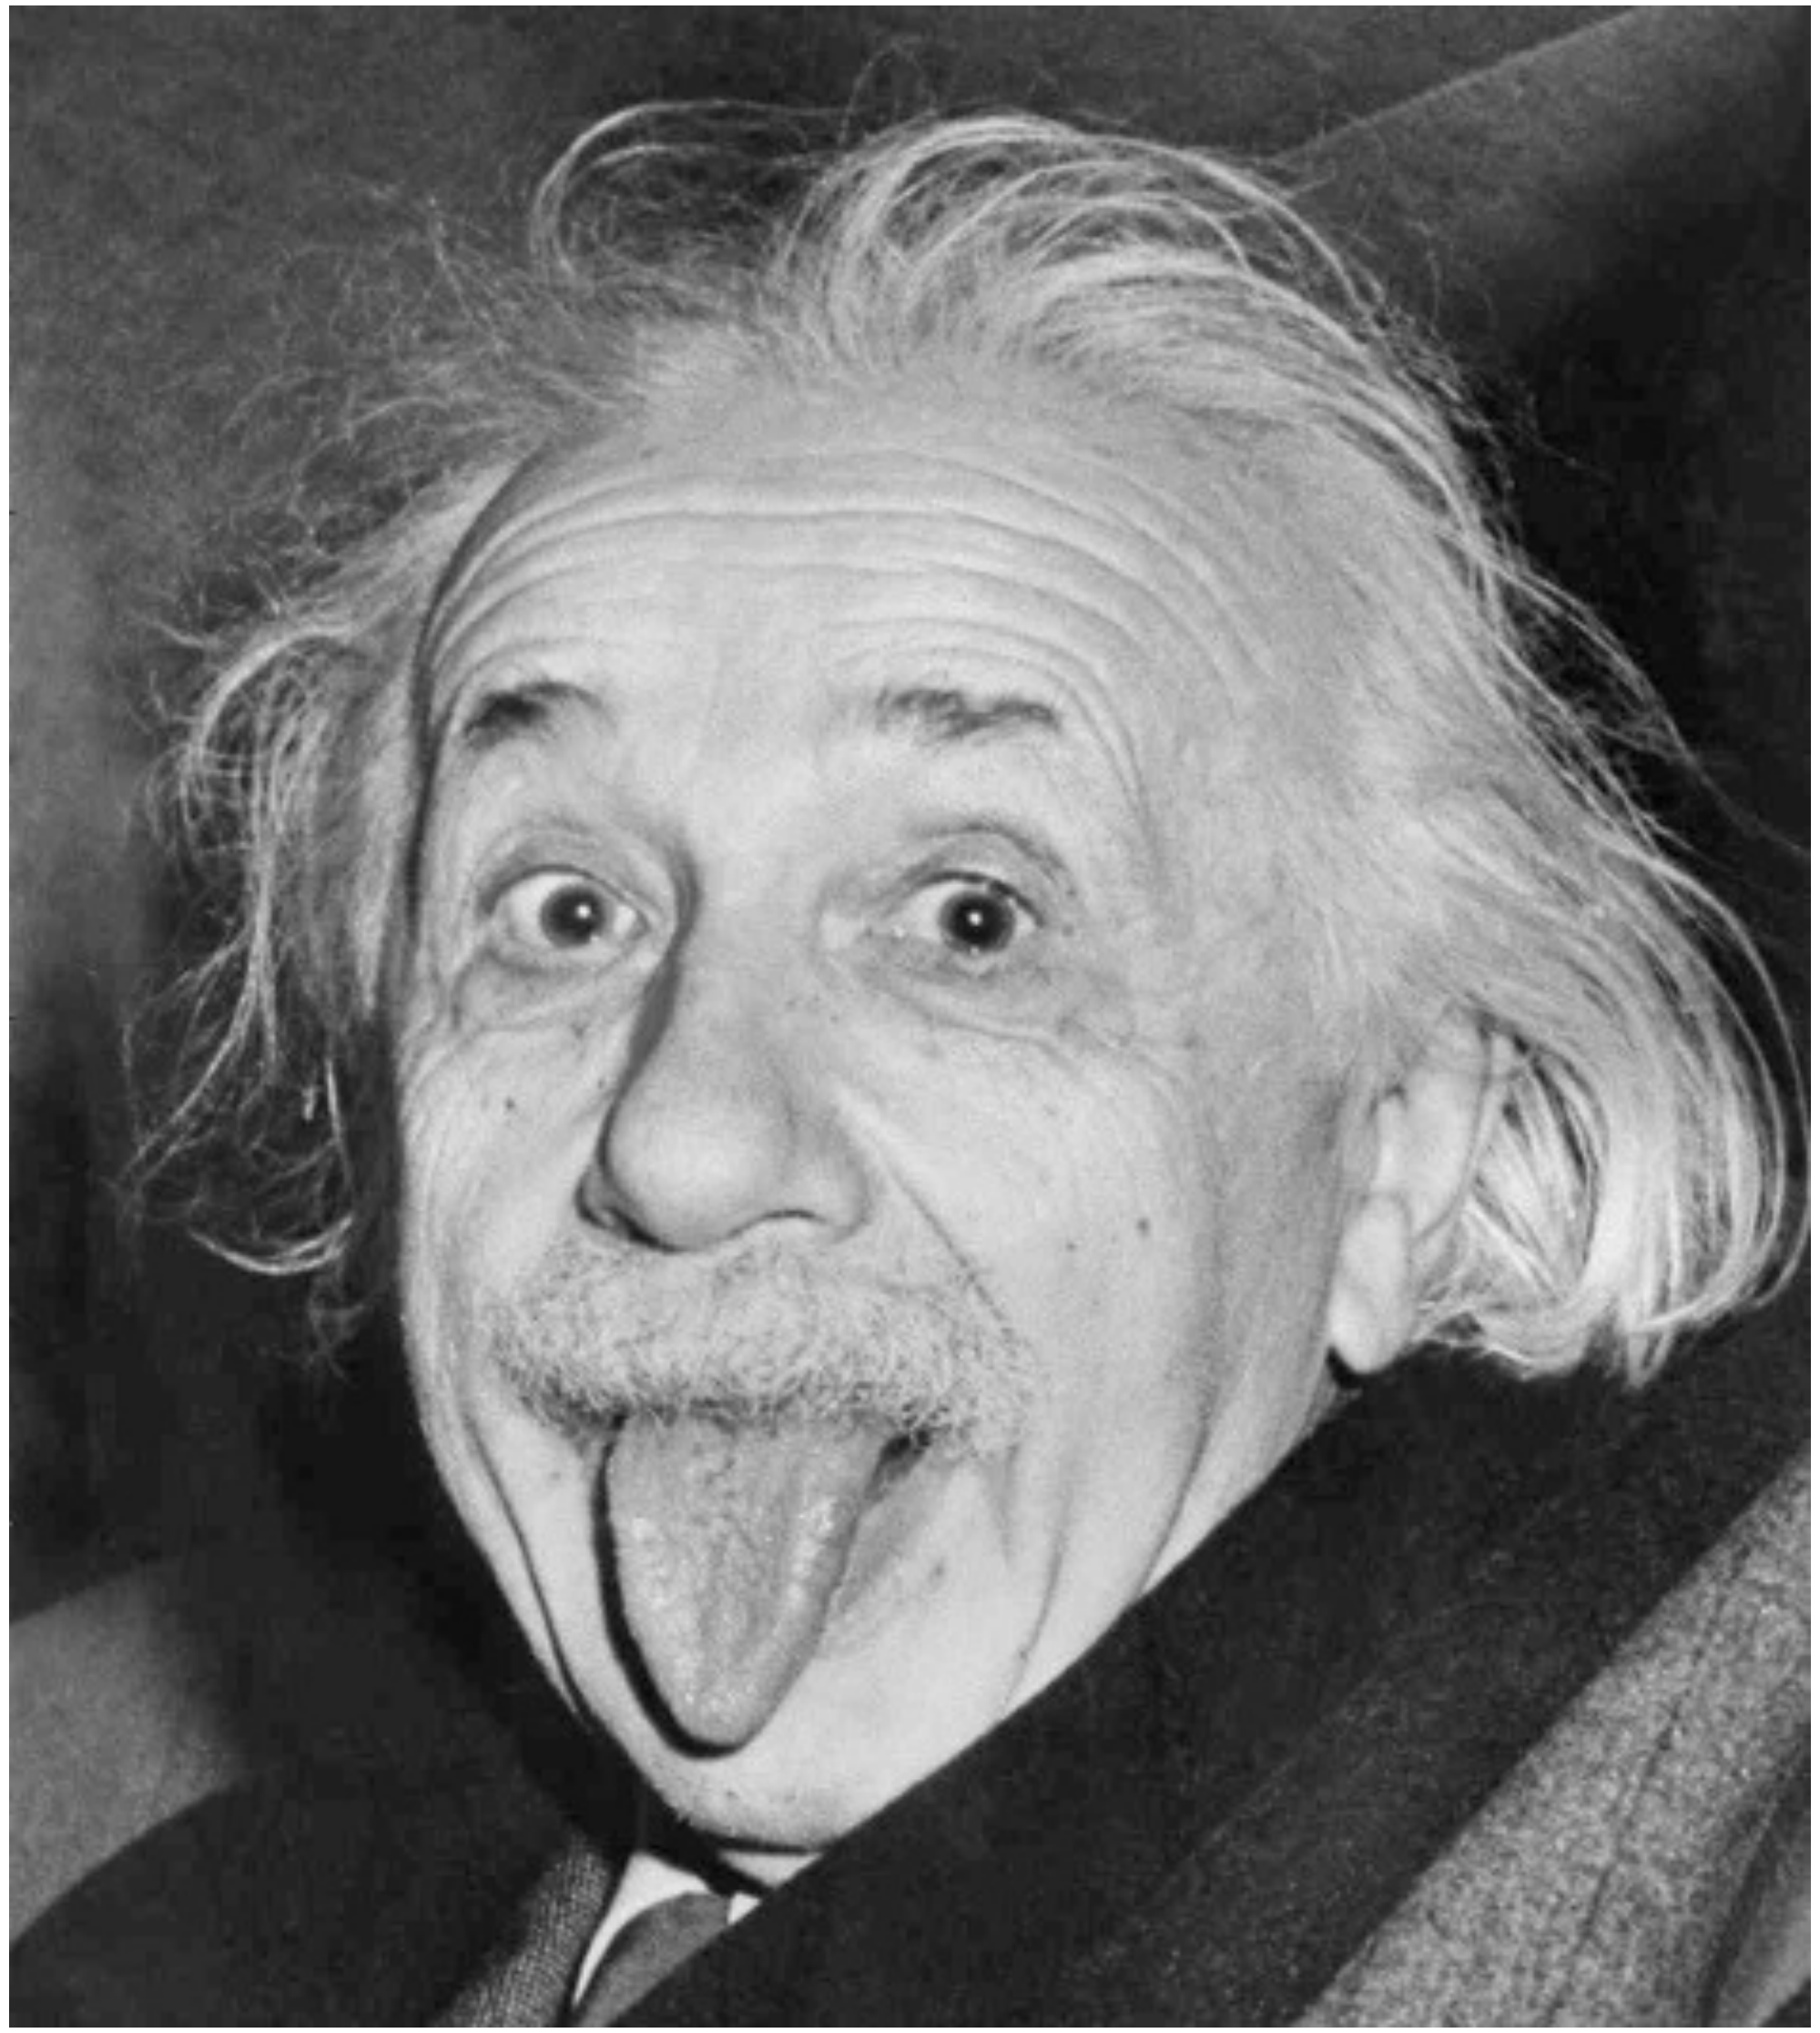

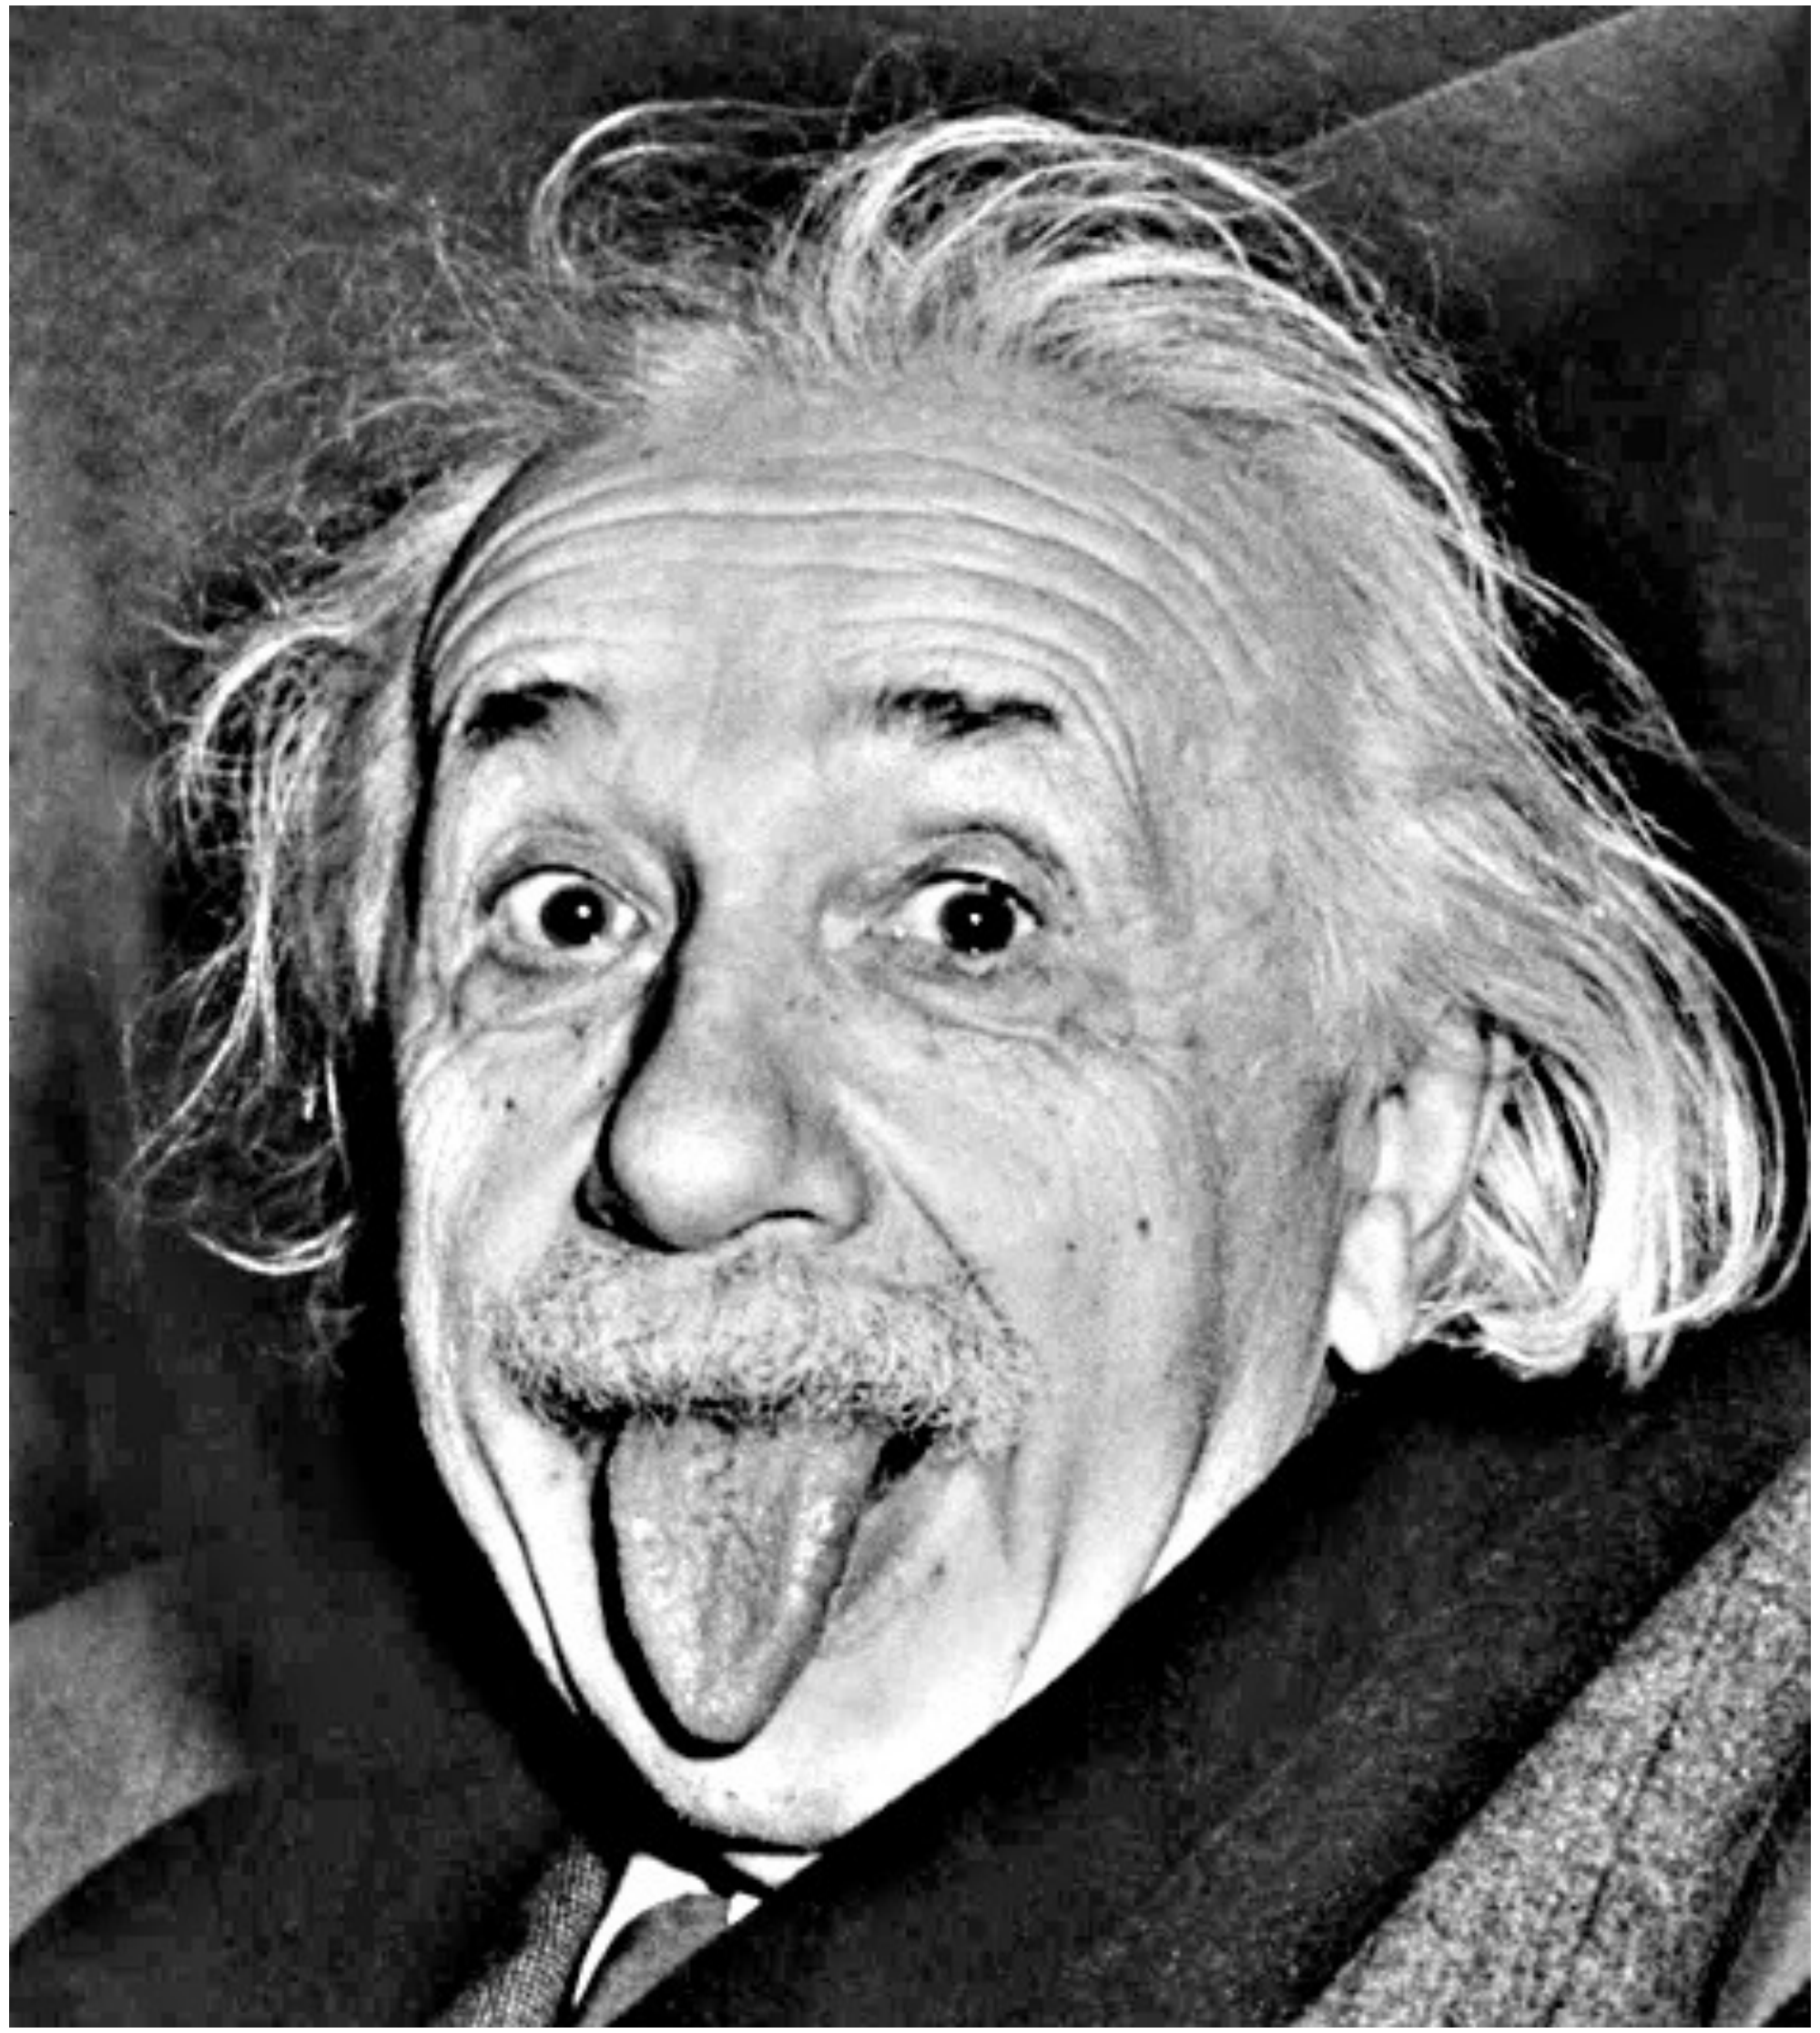

Sharpening examples

Sharpening examples

Sharpening examples

do you see
any problems
in this image?

Do not overdo it with sharpening

original

sharpened

oversharpened

What is wrong in this image?

Image gradients

What are image edges?

grayscale image

$f(\boldsymbol{x})$

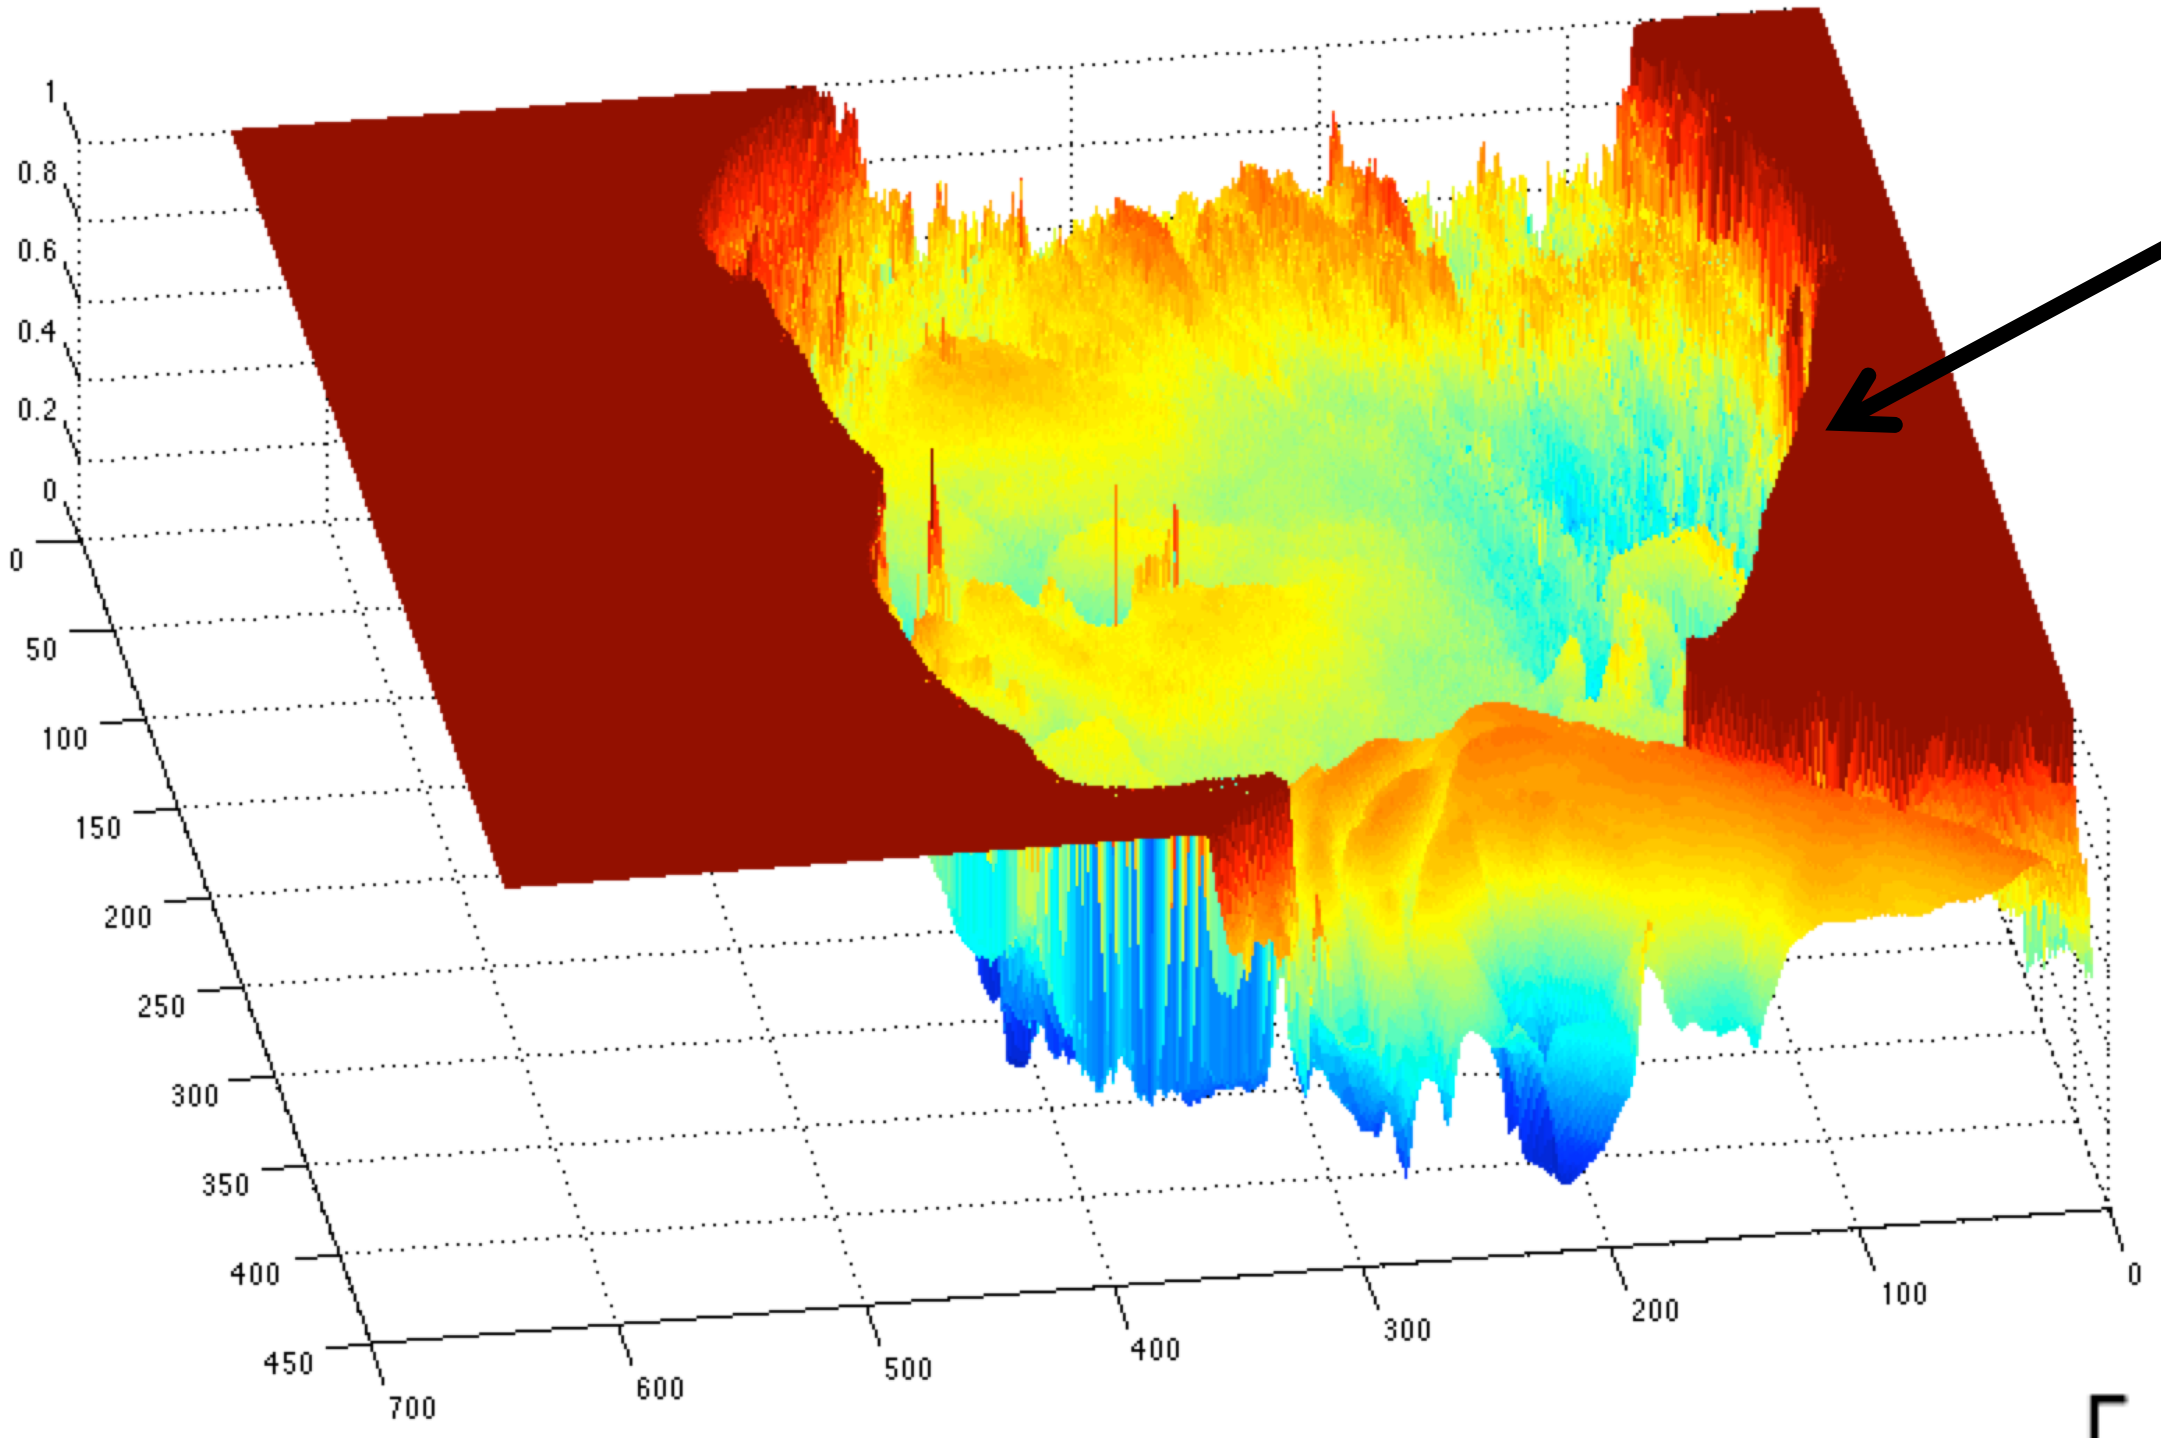

Very sharp discontinuities in intensity.

domain $\boldsymbol{x} = \begin{bmatrix} x \\ y \end{bmatrix}$

Detecting edges

How would you go about detecting edges in an image (i.e., discontinuities in a function)?

Detecting edges

How would you go about detecting edges in an image (i.e., discontinuities in a function)?

✓ You take derivatives: derivatives are large at discontinuities.

How do you differentiate a discrete image (or any other discrete signal)?

Detecting edges

How would you go about detecting edges in an image (i.e., discontinuities in a function)?

✓ You take derivatives: derivatives are large at discontinuities.

How do you differentiate a discrete image (or any other discrete signal)?

✓ You use finite differences.

Finite differences

High-school reminder: definition of a derivative using forward difference

$$f'(x) = \lim_{h \to 0} \frac{f(x+h) - f(x)}{h}$$

Finite differences

High-school reminder: definition of a derivative using forward difference

$$f'(x) = \lim_{h \to 0} \frac{f(x+h) - f(x)}{h}$$

Alternative: use central difference

$$f'(x) = \lim_{h \to 0} \frac{f(x+0.5h) - f(x-0.5h)}{h}$$

For discrete signals: Remove limit and set h = 2

$$f'(x) = \frac{f(x+1) - f(x-1)}{2}$$

What convolution kernel does this correspond to?

Finite differences

High-school reminder: definition of a derivative using forward difference

$$f'(x) = \lim_{h \to 0} \frac{f(x+h) - f(x)}{h}$$

Alternative: use central difference

$$f'(x) = \lim_{h \to 0} \frac{f(x+0.5h) - f(x-0.5h)}{h}$$

For discrete signals: Remove limit and set h = 2

$$f'(x) = \frac{f(x+1) - f(x-1)}{2}$$

-1	0	1

?

1	0	-1

?

Finite differences

High-school reminder: definition of a derivative using forward difference

$$f'(x) = \lim_{h \to 0} \frac{f(x+h) - f(x)}{h}$$

Alternative: use central difference

$$f'(x) = \lim_{h \to 0} \frac{f(x+0.5h) - f(x-0.5h)}{h}$$

For discrete signals: Remove limit and set h = 2

$$f'(x) = \frac{f(x+1) - f(x-1)}{2}$$

1D derivative filter

1	0	-1

The Sobel filter

$$\begin{bmatrix} 1 & 0 & -1 \\ 2 & 0 & -2 \\ 1 & 0 & -1 \end{bmatrix} = \begin{bmatrix} 1 \\ 2 \\ 1 \end{bmatrix} * \begin{bmatrix} 1 & 0 & -1 \end{bmatrix}$$

Sobel filter

What filter is this?

1D derivative filter

The Sobel filter

$$\underbrace{\begin{array}{|c|c|c|}\hline 1 & 0 & -1 \\ \hline 2 & 0 & -2 \\ \hline 1 & 0 & -1 \\ \hline \end{array}}_{\text{Sobel filter}} = \underbrace{\begin{array}{|c|}\hline 1 \\ \hline 2 \\ \hline 1 \\ \hline \end{array}}_{\text{Blurring}} * \underbrace{\begin{array}{|c|c|c|}\hline 1 & 0 & -1 \\ \hline \end{array}}_{\text{1D derivative filter}}$$

Does this filter return large responses on vertical or horizontal lines?

The Sobel filter

Horizontal Sober filter:

$$\begin{bmatrix} 1 & 0 & -1 \\ 2 & 0 & -2 \\ 1 & 0 & -1 \end{bmatrix} = \begin{bmatrix} 1 \\ 2 \\ 1 \end{bmatrix} * \begin{bmatrix} 1 & 0 & -1 \end{bmatrix}$$

What does the vertical Sobel filter look like?

The Sobel filter

Horizontal Sober filter:

$$\begin{bmatrix} 1 & 0 & -1 \\ 2 & 0 & -2 \\ 1 & 0 & -1 \end{bmatrix} = \begin{bmatrix} 1 \\ 2 \\ 1 \end{bmatrix} * \begin{bmatrix} 1 & 0 & -1 \end{bmatrix}$$

Vertical Sobel filter:

$$\begin{bmatrix} 1 & 2 & 1 \\ 0 & 0 & 0 \\ -1 & -2 & -1 \end{bmatrix} = \begin{bmatrix} 1 \\ 0 \\ -1 \end{bmatrix} * \begin{bmatrix} 1 & 2 & 1 \end{bmatrix}$$

Sobel filter example

original

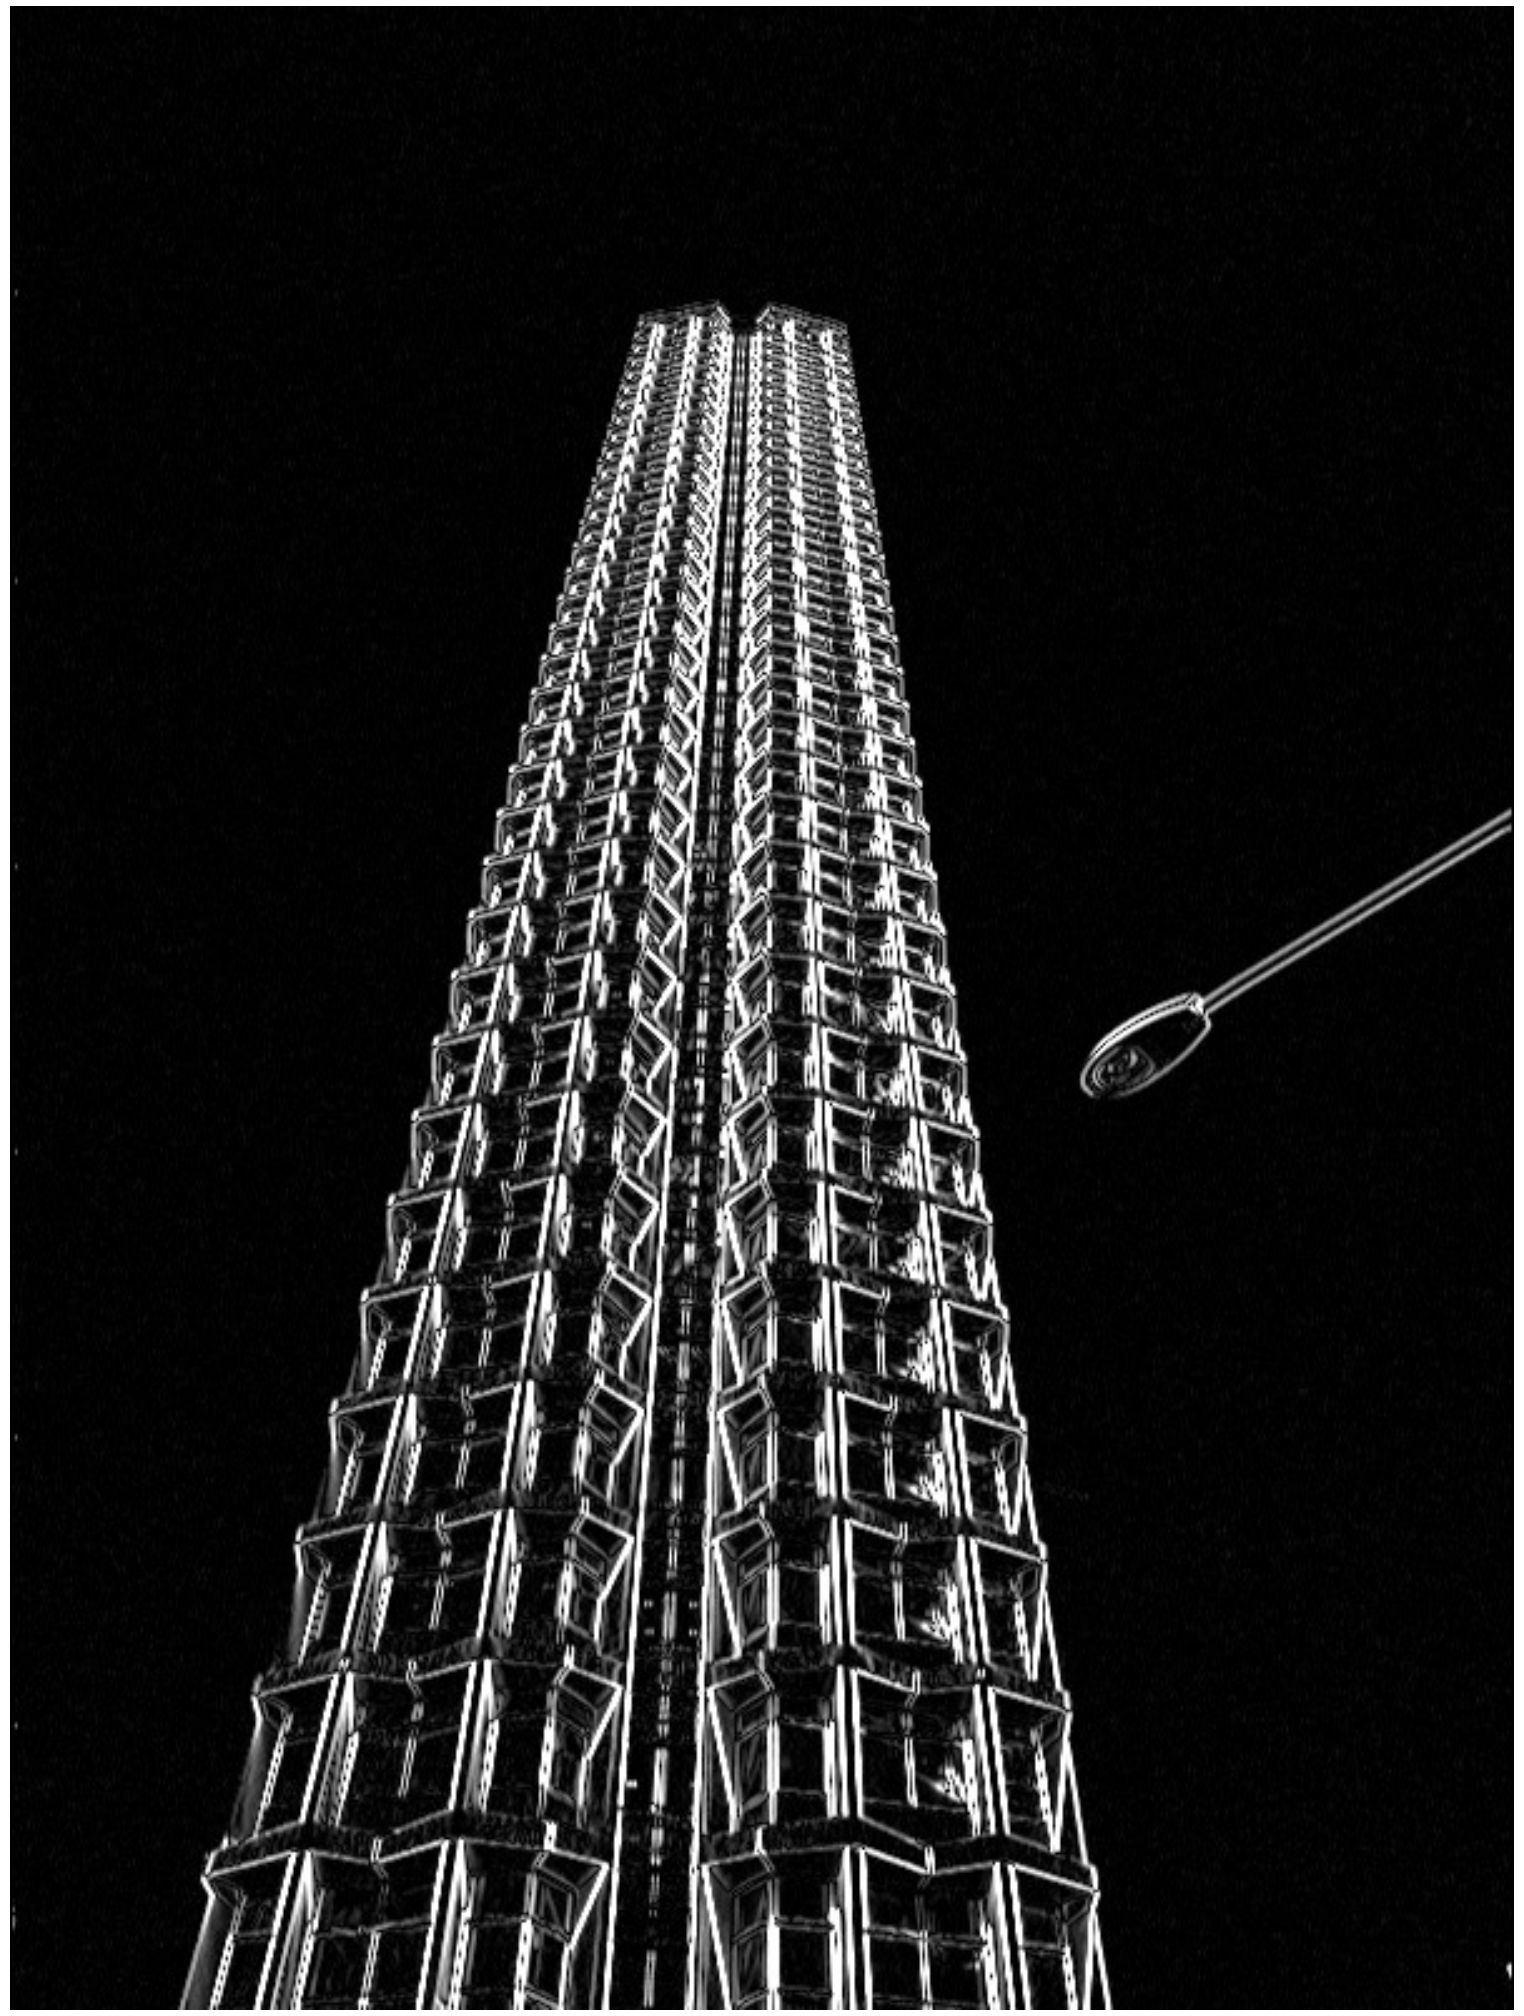

which Sobel filter?

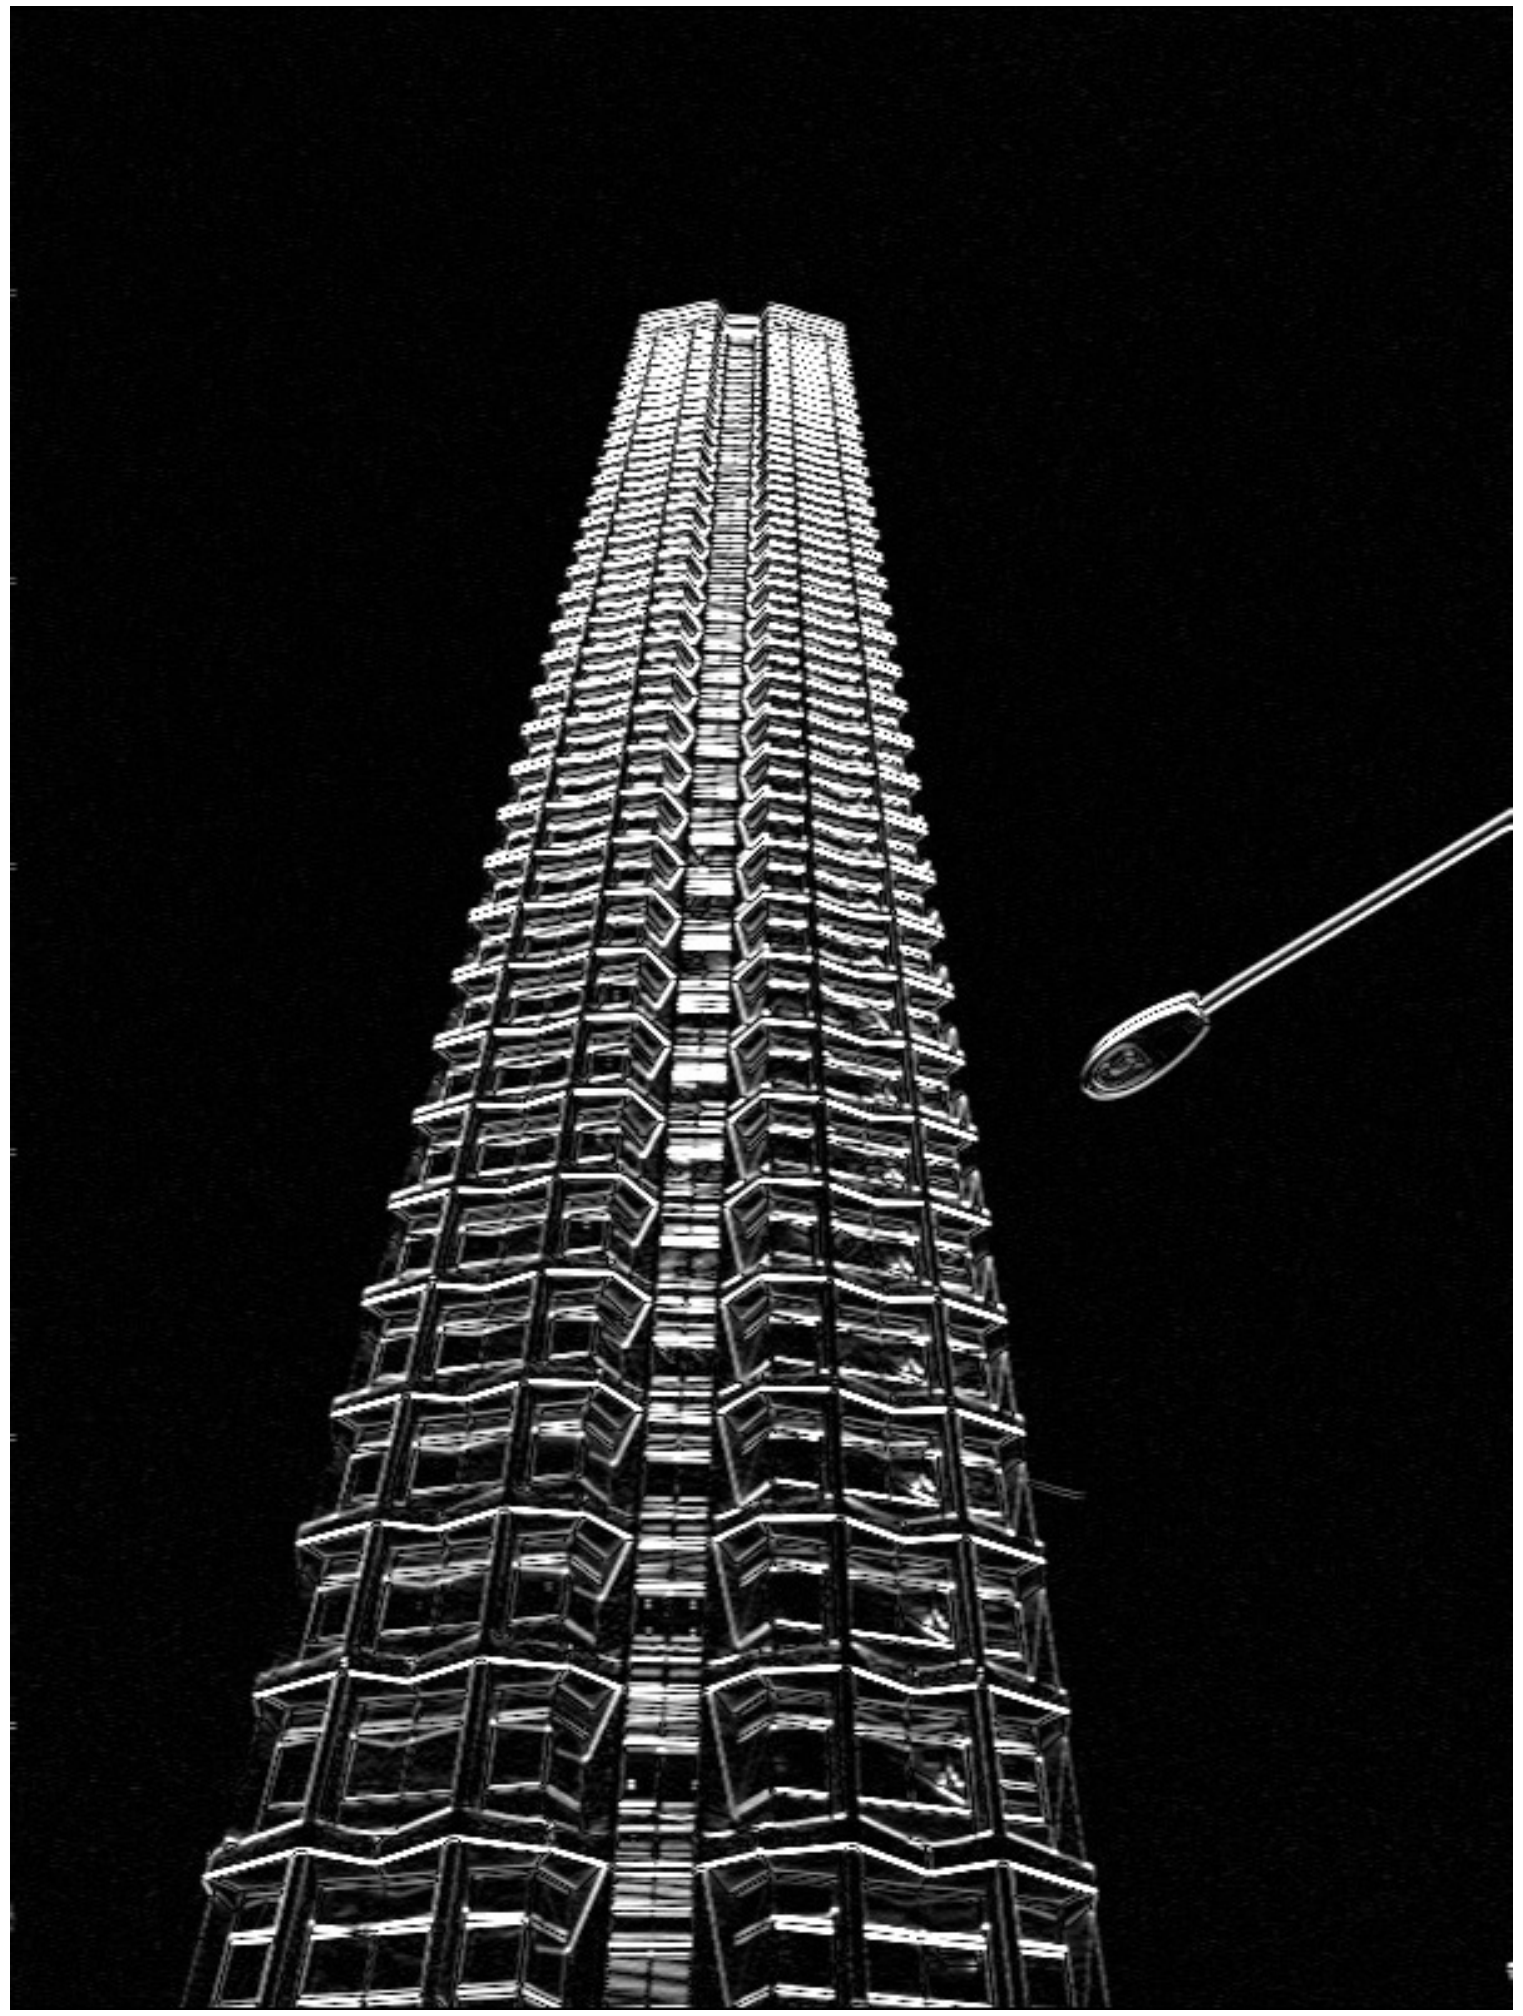

which Sobel filter?

Sobel filter example


original

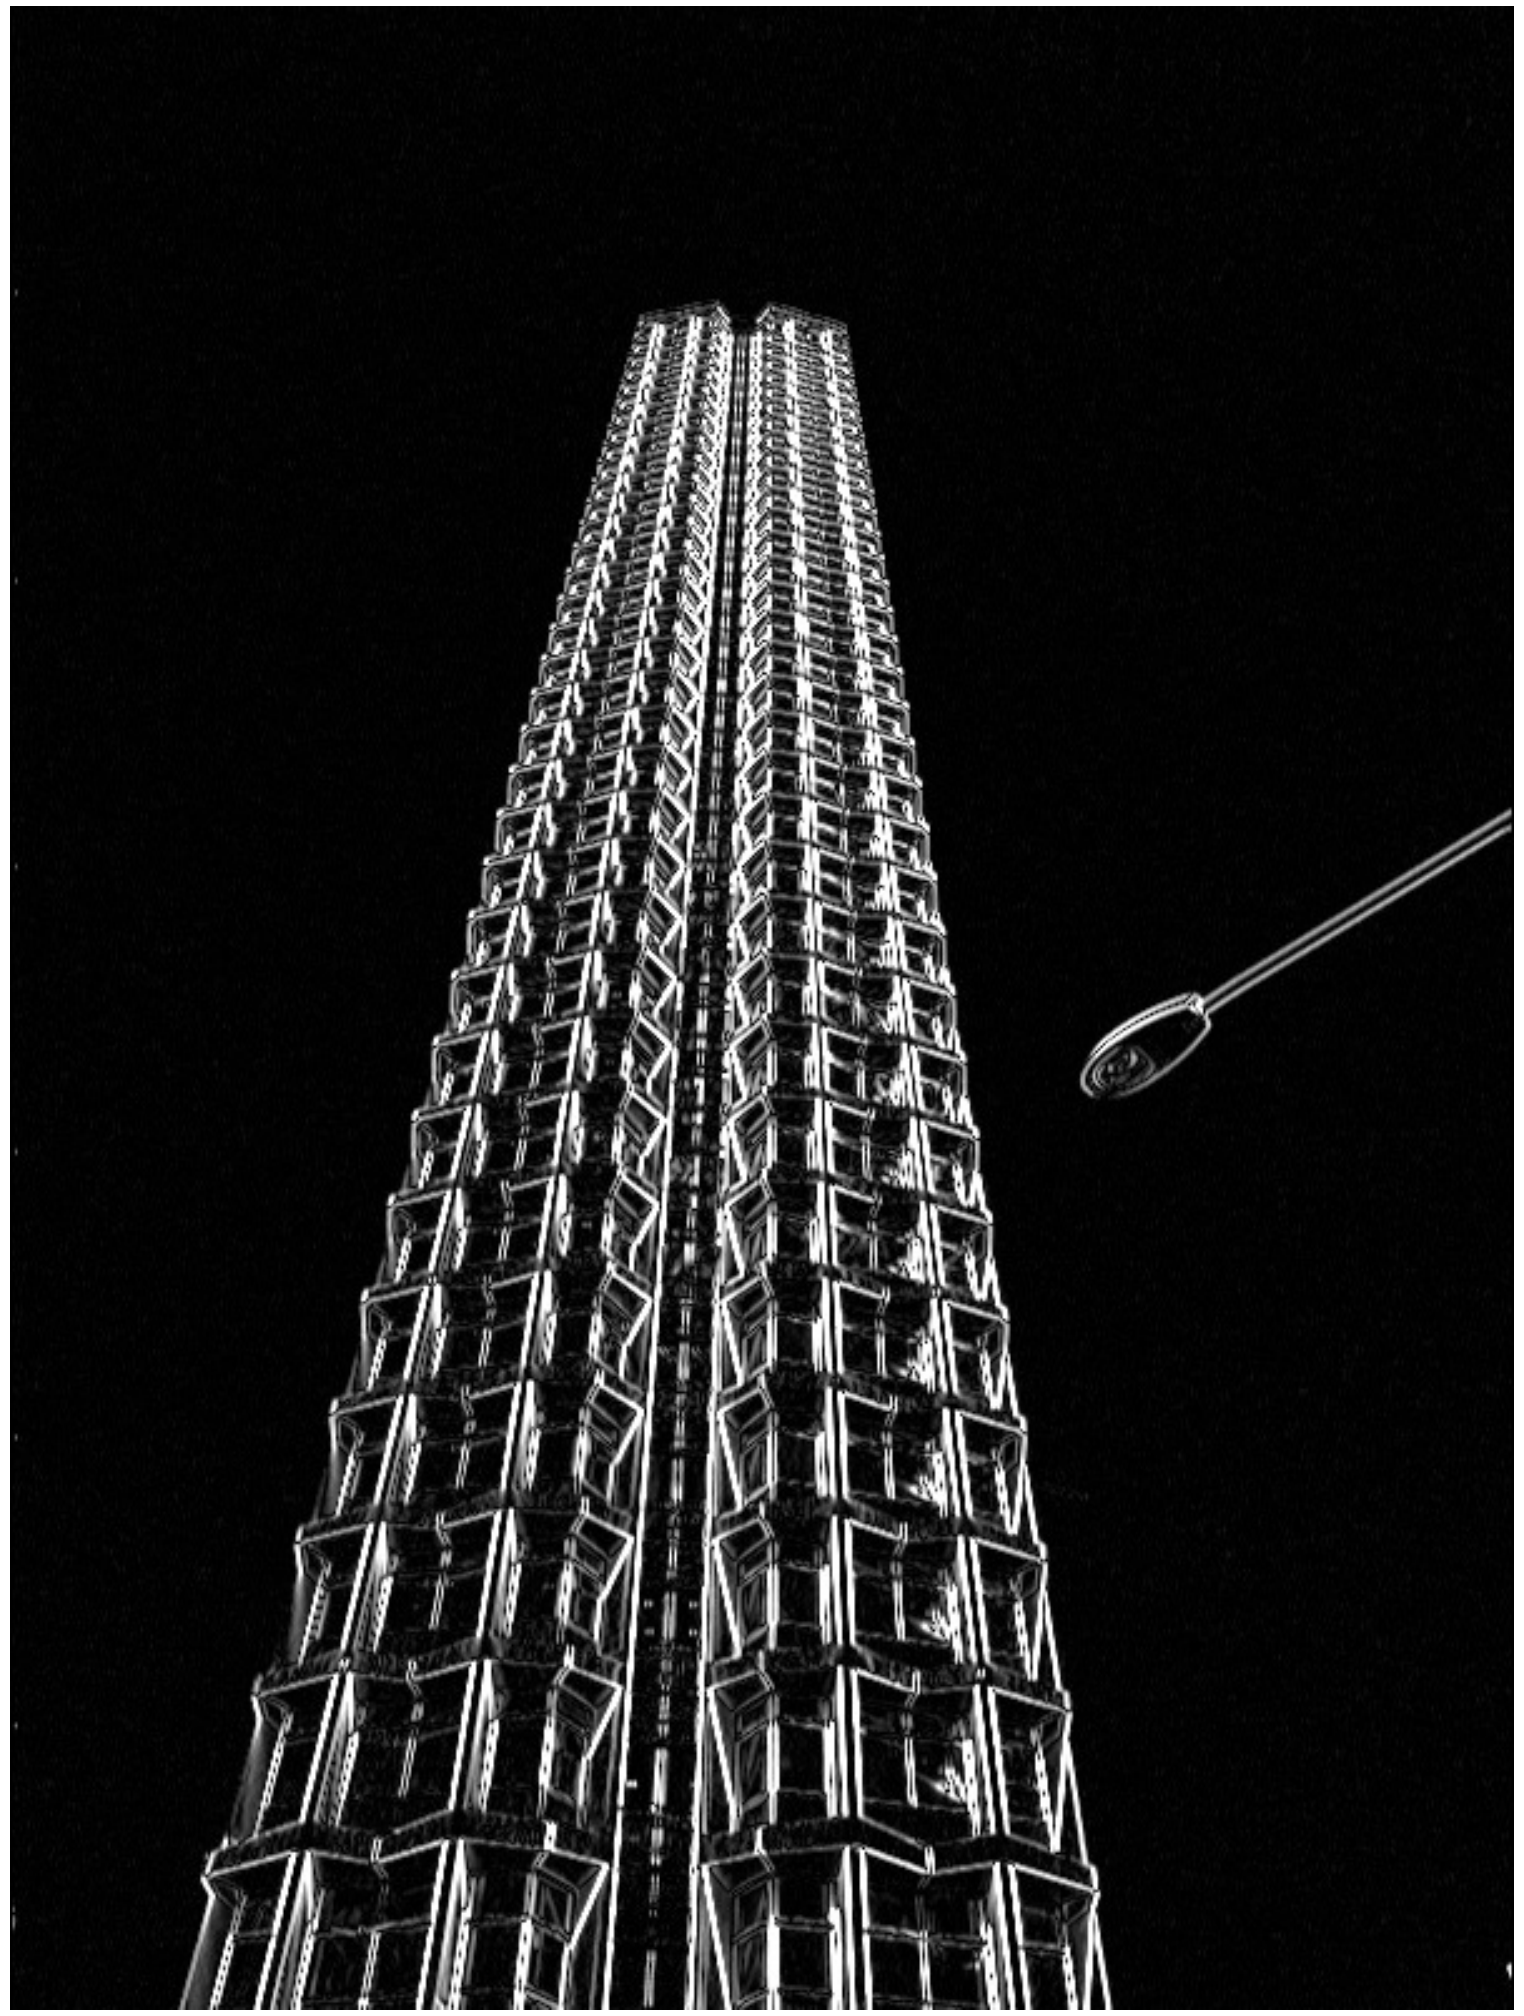
horizontal Sobel filter

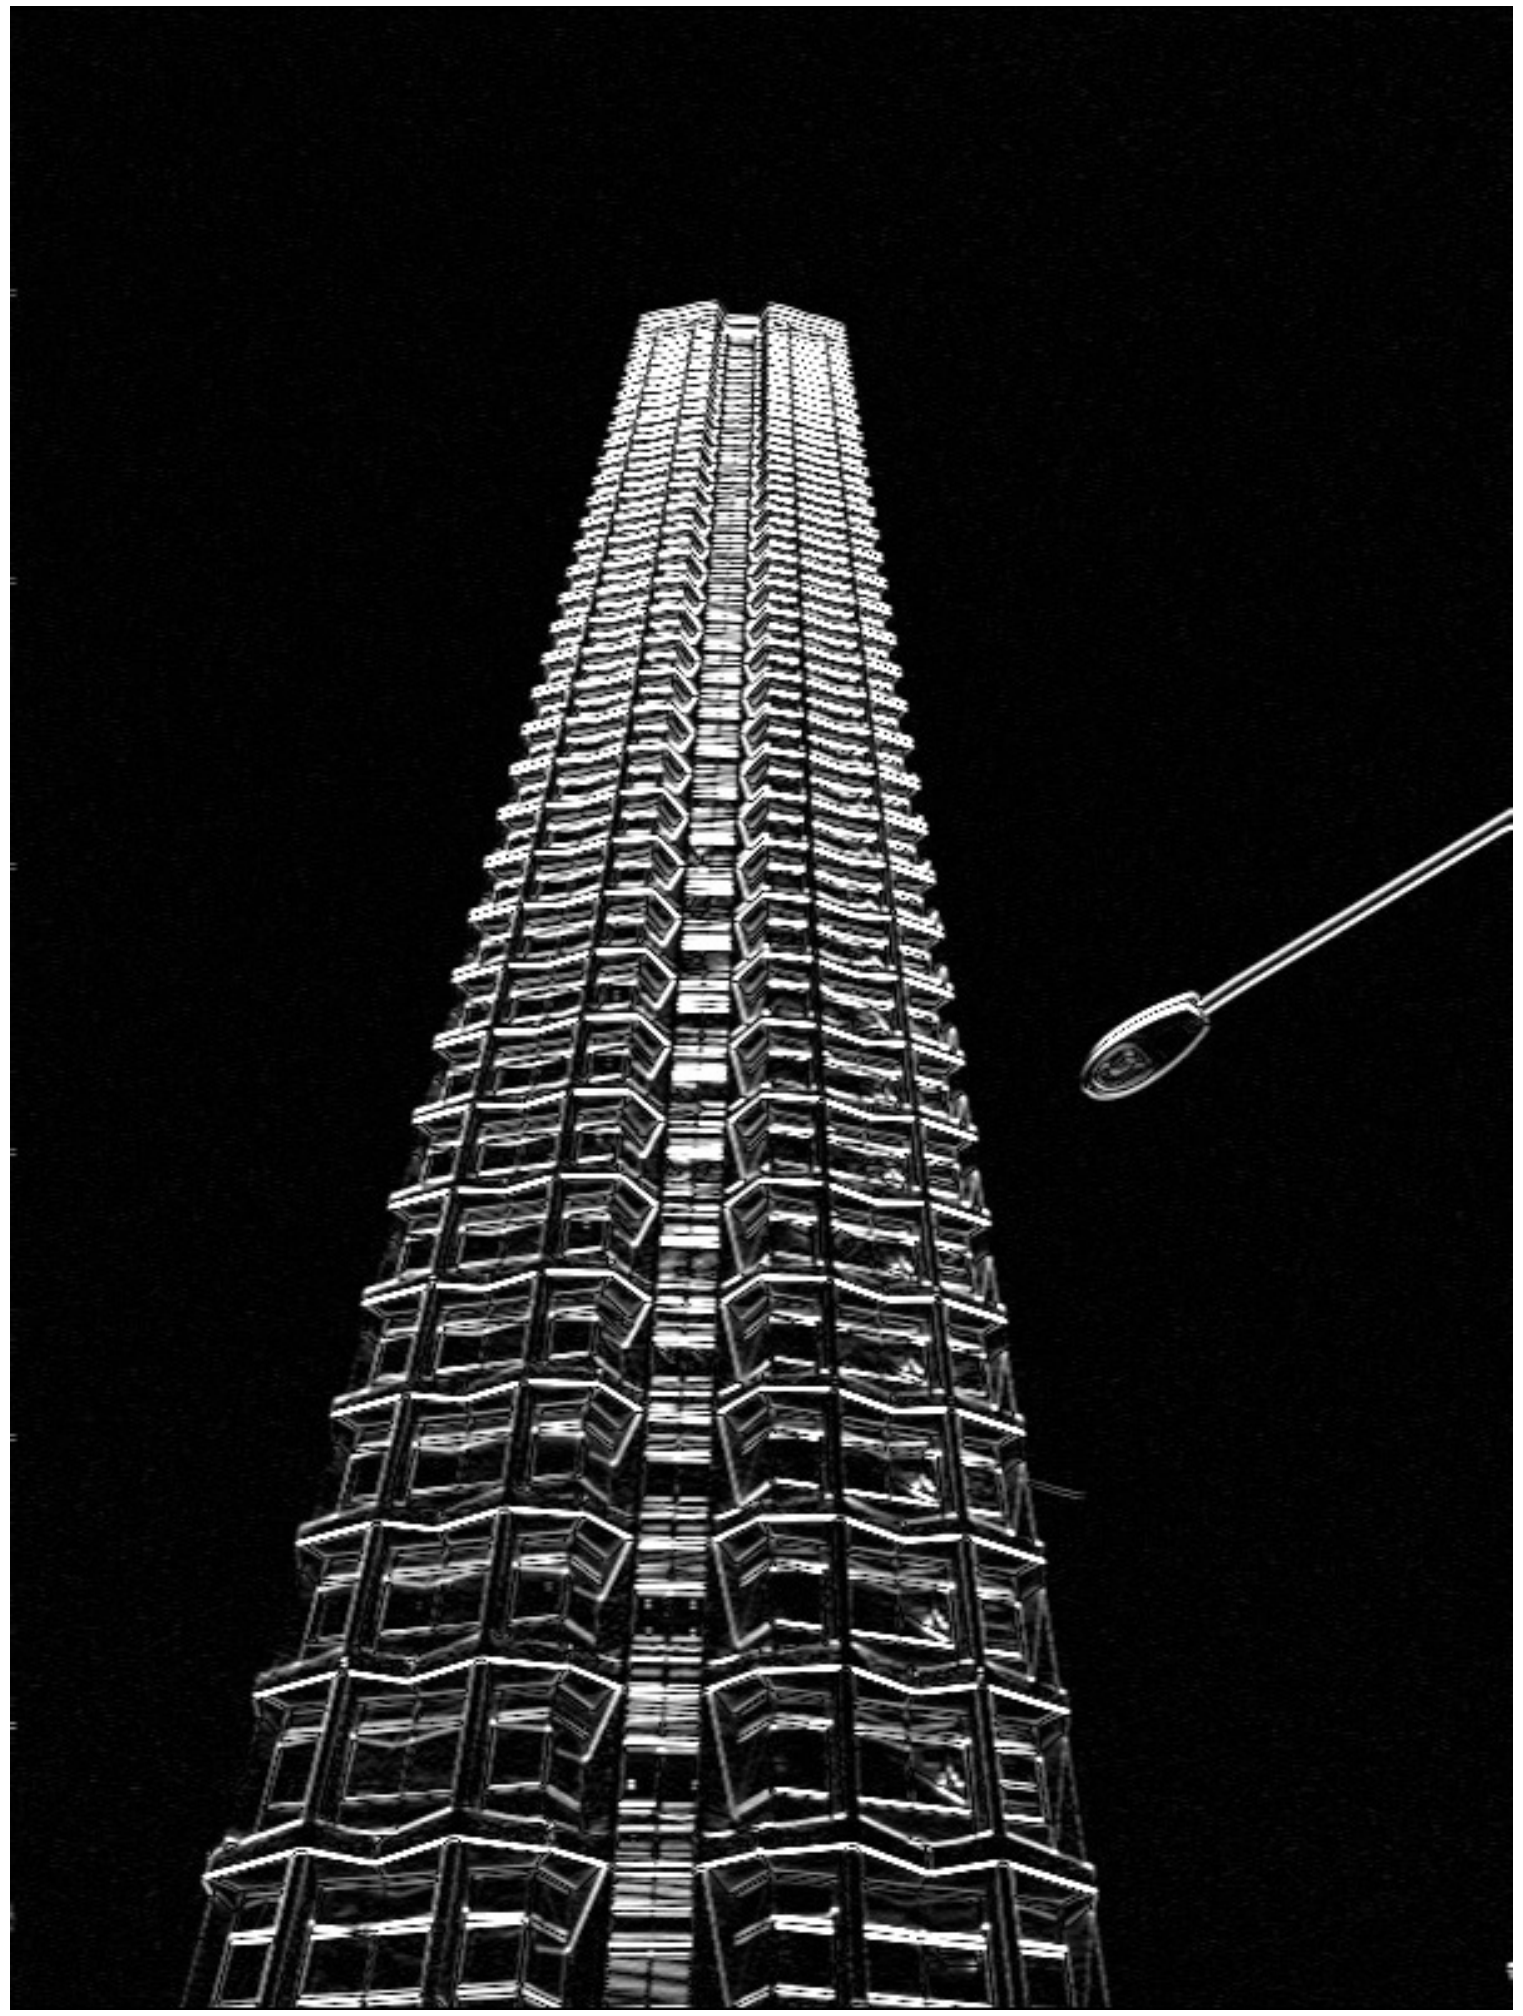
vertical Sobel filter

Sobel filter example

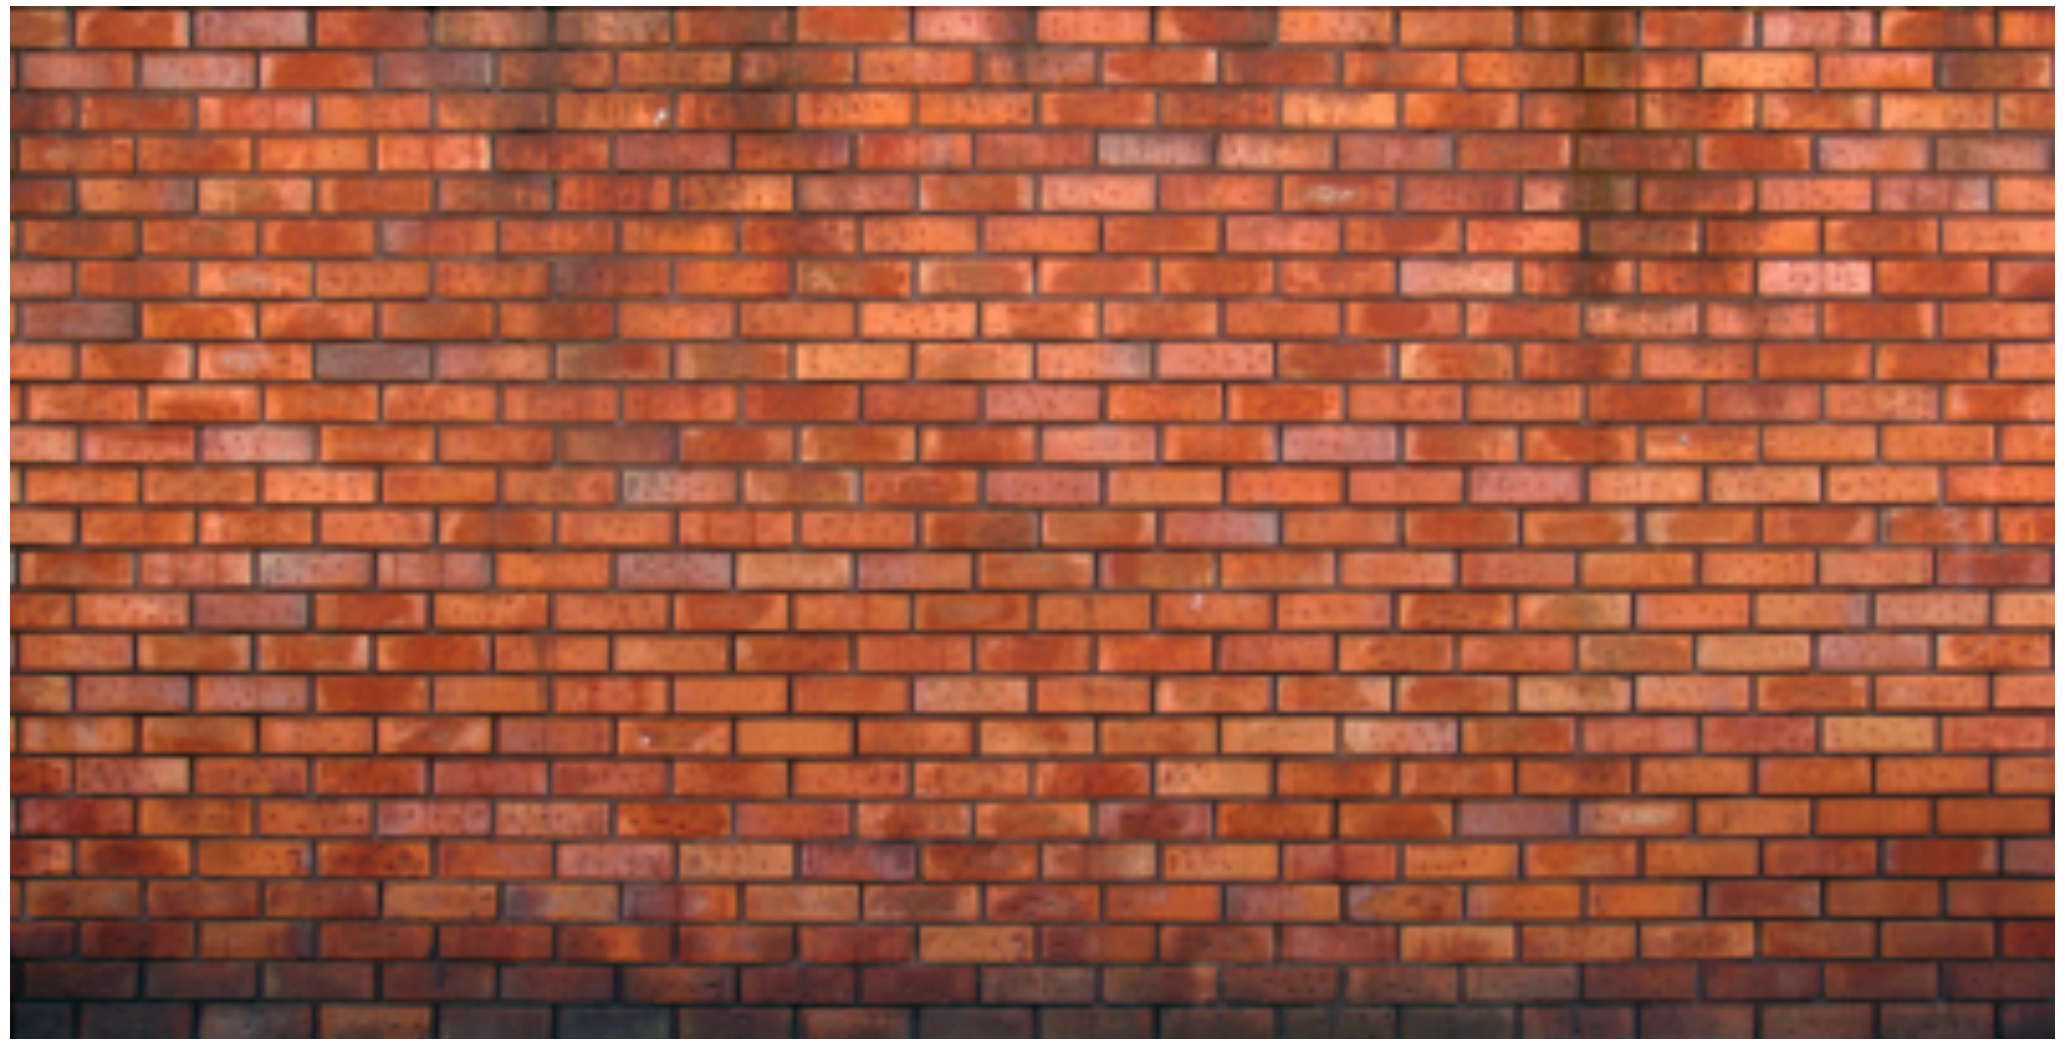

original

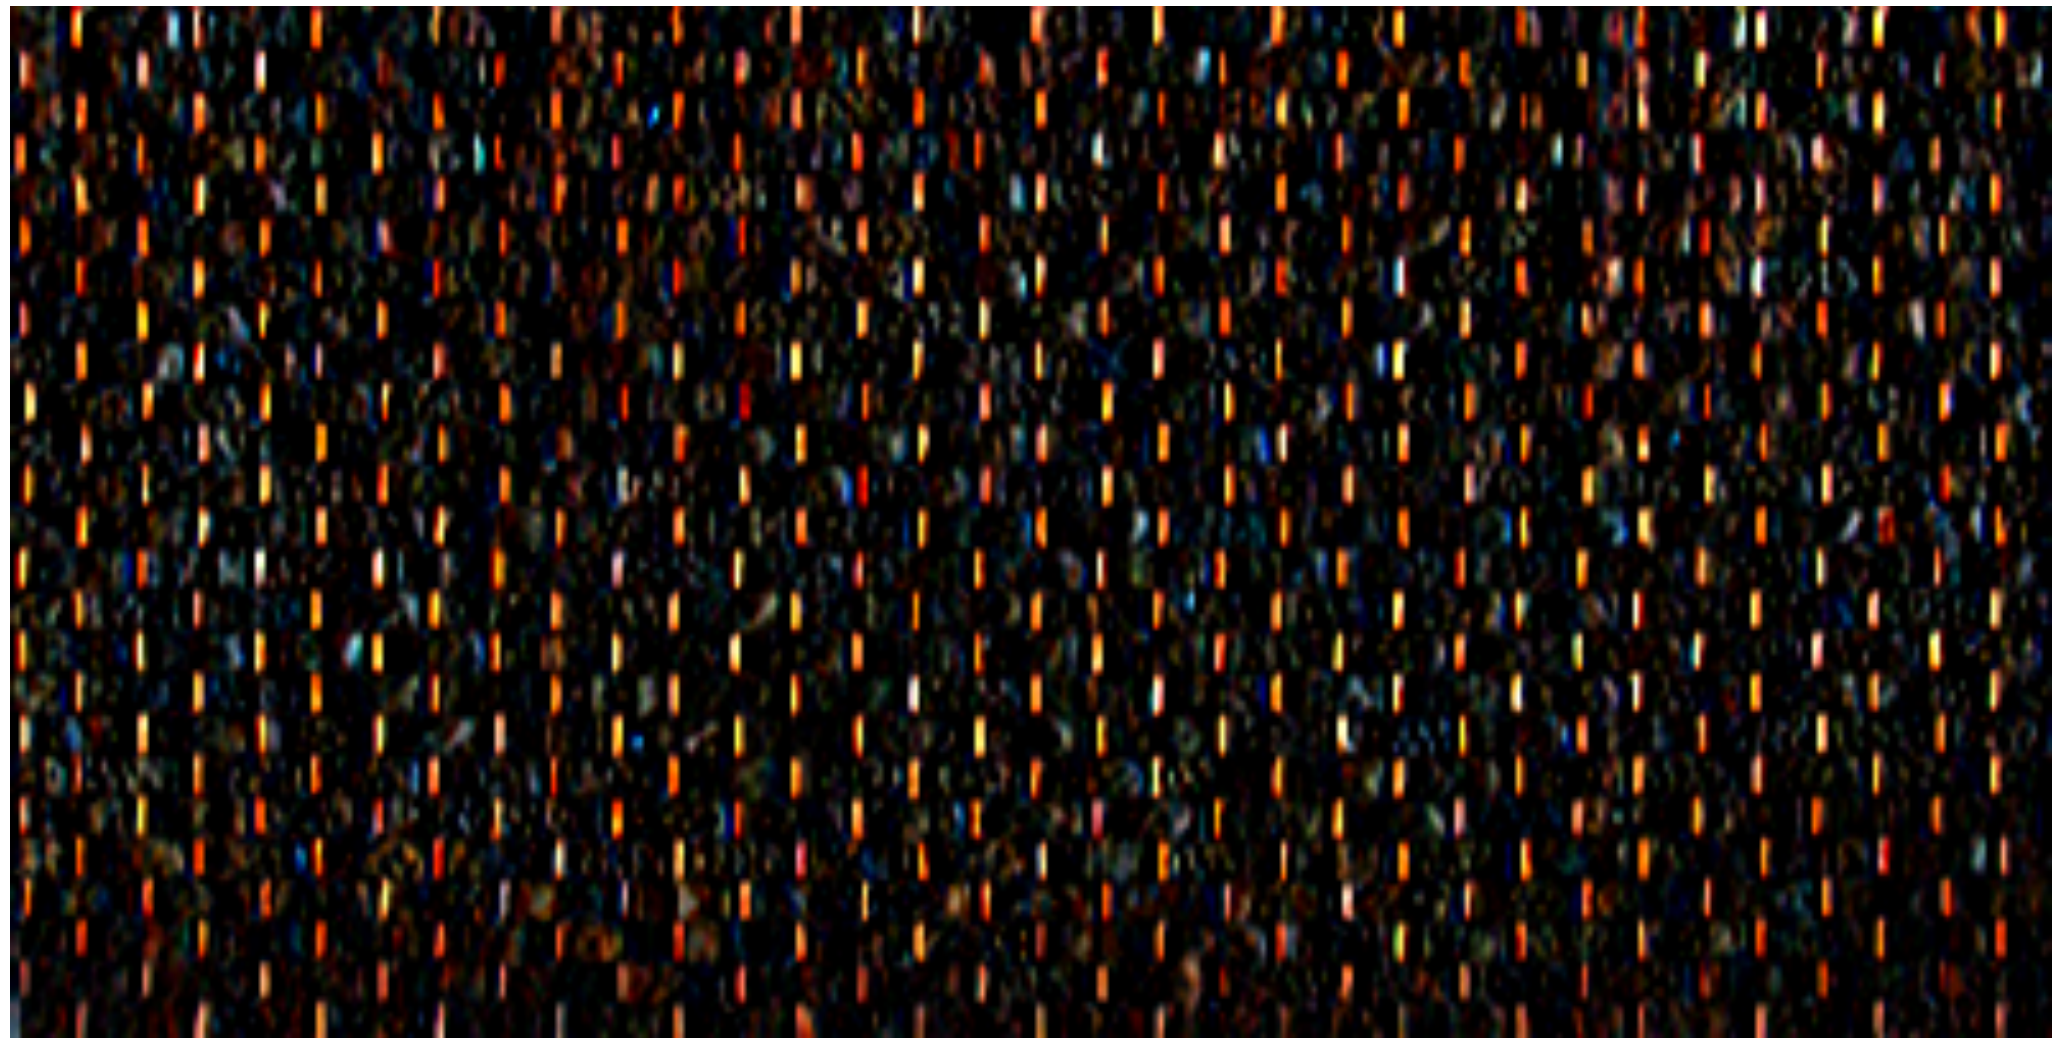

horizontal Sobel filter

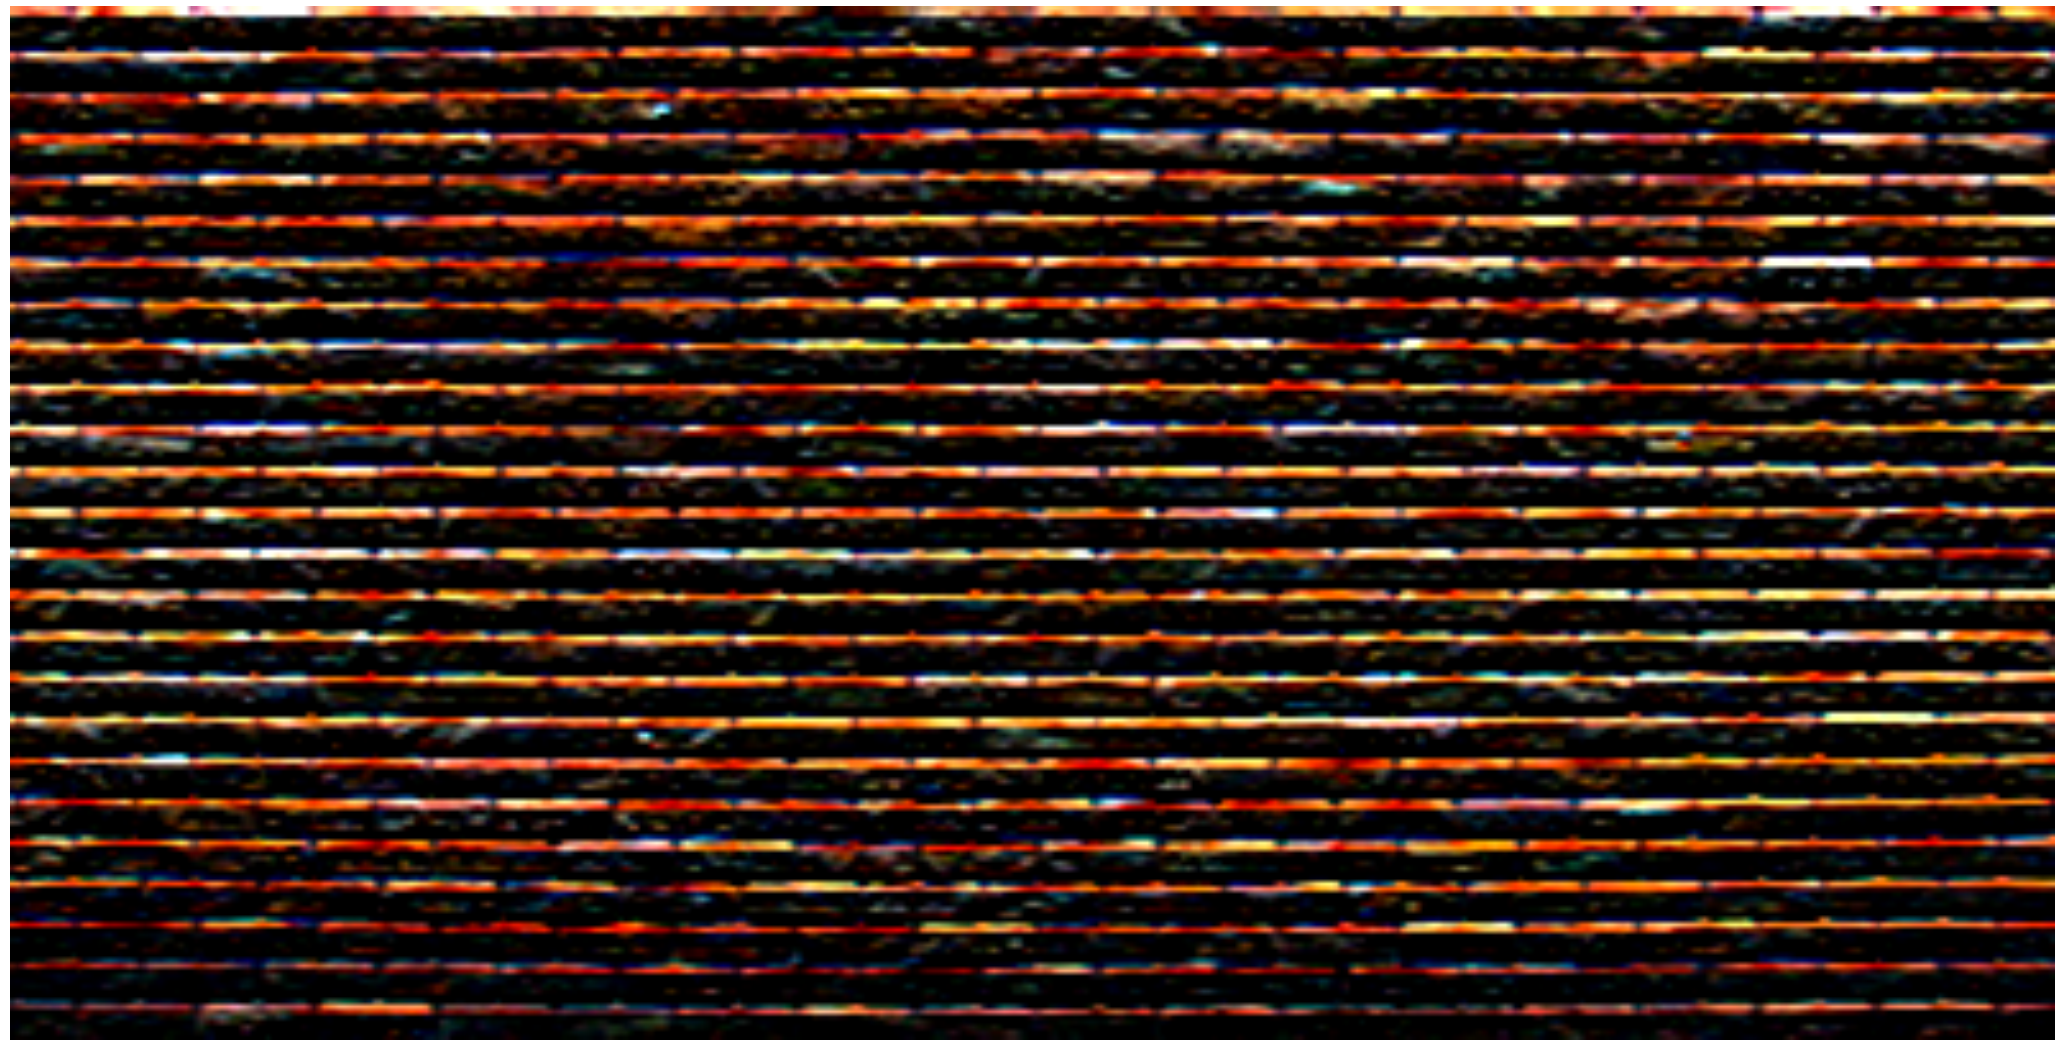

vertical Sobel filter

Several derivative filters

Sobel

1	0	-1
2	0	-2
1	0	-1

1	2	1
0	0	0
-1	-2	-1

Scharr

3	0	-3
10	0	-10
3	0	-3

3	10	3
0	0	0
-3	-10	-3

Prewitt

1	0	-1
1	0	-1
1	0	-1

1	1	1
0	0	0
-1	-1	-1

Roberts

0	1
-1	0

1	0
0	-1

- How are the other filters derived and how do they relate to the Sobel filter?
- How would you derive a derivative filter that is larger than 3x3?

Computing image gradients

1. Select your favorite derivative filters.

$$
\boldsymbol{S}_x = \begin{array}{|c|c|c|} \hline 1 & 0 & -1 \\ \hline 2 & 0 & -2 \\ \hline 1 & 0 & -1 \\ \hline \end{array}
\qquad
\boldsymbol{S}_y = \begin{array}{|c|c|c|} \hline 1 & 2 & 1 \\ \hline 0 & 0 & 0 \\ \hline -1 & -2 & -1 \\ \hline \end{array}
$$

Computing image gradients

1. Select your favorite derivative filters.

$$\boldsymbol{S}_x = \begin{array}{|c|c|c|}\hline 1 & 0 & -1 \\ \hline 2 & 0 & -2 \\ \hline 1 & 0 & -1 \\ \hline \end{array} \qquad \boldsymbol{S}_y = \begin{array}{|c|c|c|}\hline 1 & 2 & 1 \\ \hline 0 & 0 & 0 \\ \hline -1 & -2 & -1 \\ \hline \end{array}$$

2. Convolve with the image to compute derivatives.

$$\frac{\partial \boldsymbol{f}}{\partial x} = \boldsymbol{S}_x \otimes \boldsymbol{f} \qquad \frac{\partial \boldsymbol{f}}{\partial y} = \boldsymbol{S}_y \otimes \boldsymbol{f}$$

Computing image gradients

1. Select your favorite derivative filters.

$$\boldsymbol{S}_x = \begin{array}{|c|c|c|}\hline 1 & 0 & -1 \\ \hline 2 & 0 & -2 \\ \hline 1 & 0 & -1 \\ \hline \end{array} \qquad \boldsymbol{S}_y = \begin{array}{|c|c|c|}\hline 1 & 2 & 1 \\ \hline 0 & 0 & 0 \\ \hline -1 & -2 & -1 \\ \hline \end{array}$$

2. Convolve with the image to compute derivatives.

$$\frac{\partial \boldsymbol{f}}{\partial x} = \boldsymbol{S}_x \otimes \boldsymbol{f} \qquad \frac{\partial \boldsymbol{f}}{\partial y} = \boldsymbol{S}_y \otimes \boldsymbol{f}$$

3. Form the image gradient, and compute its direction and amplitude.

$$\nabla \boldsymbol{f} = \left[\frac{\partial \boldsymbol{f}}{\partial x}, \frac{\partial \boldsymbol{f}}{\partial y}\right] \qquad \theta = \tan^{-1}\left(\frac{\partial f}{\partial y} \Big/ \frac{\partial f}{\partial x}\right) \qquad ||\nabla f|| = \sqrt{\left(\frac{\partial f}{\partial x}\right)^2 + \left(\frac{\partial f}{\partial y}\right)^2}$$

gradient direction amplitude

Image gradient example

original

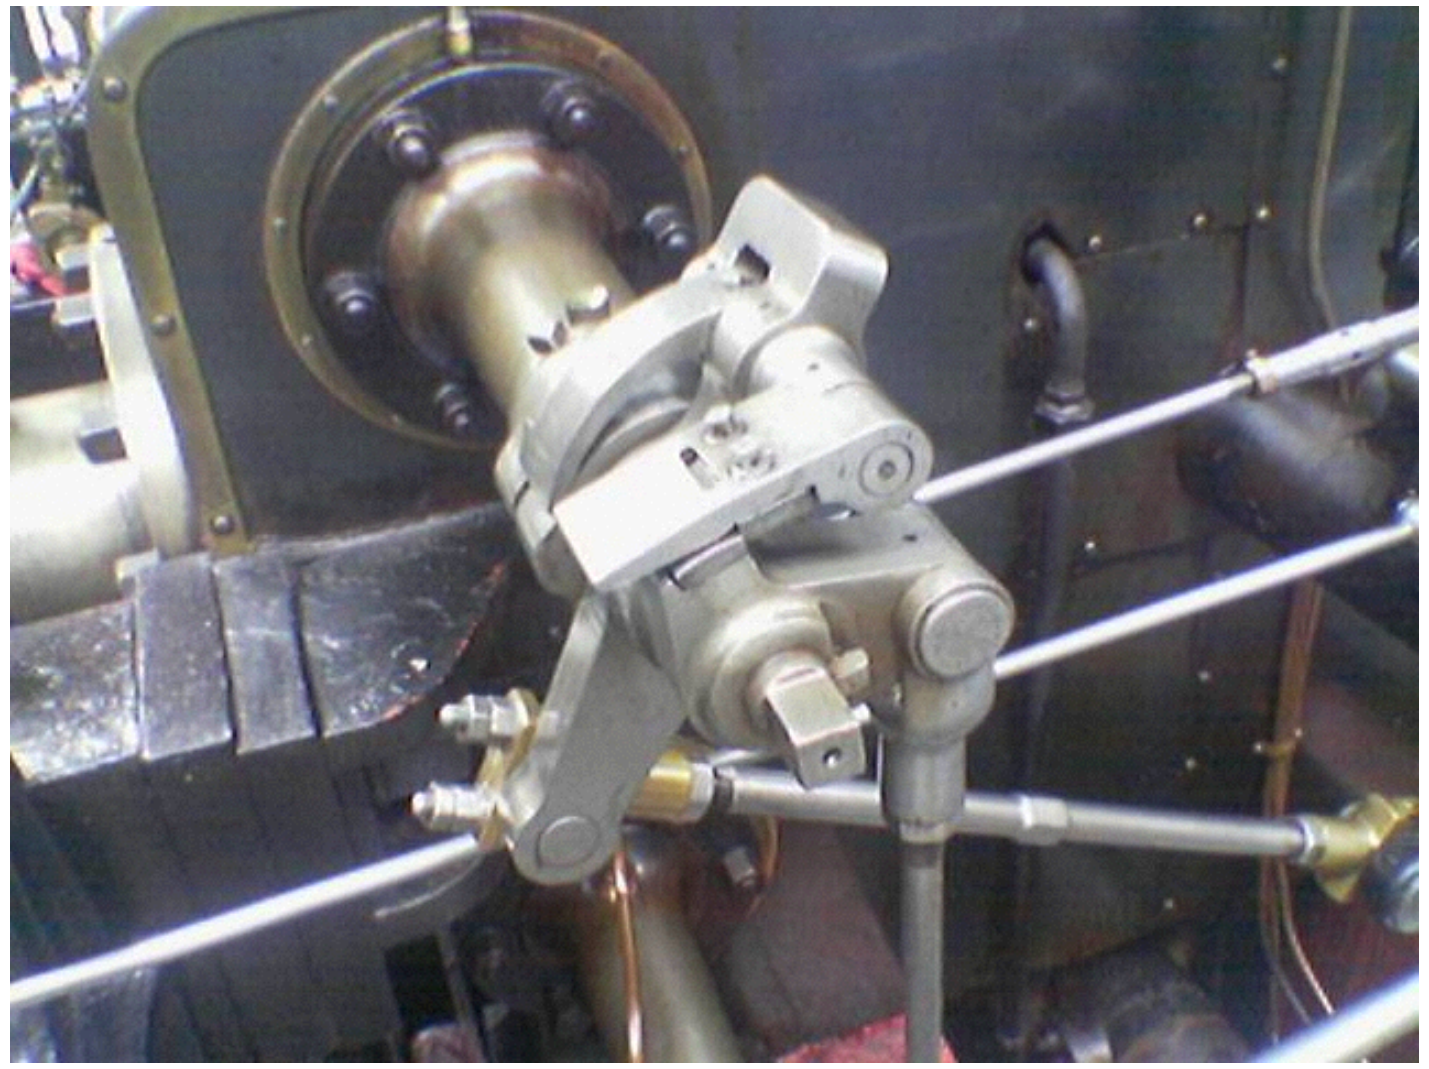

vertical derivative

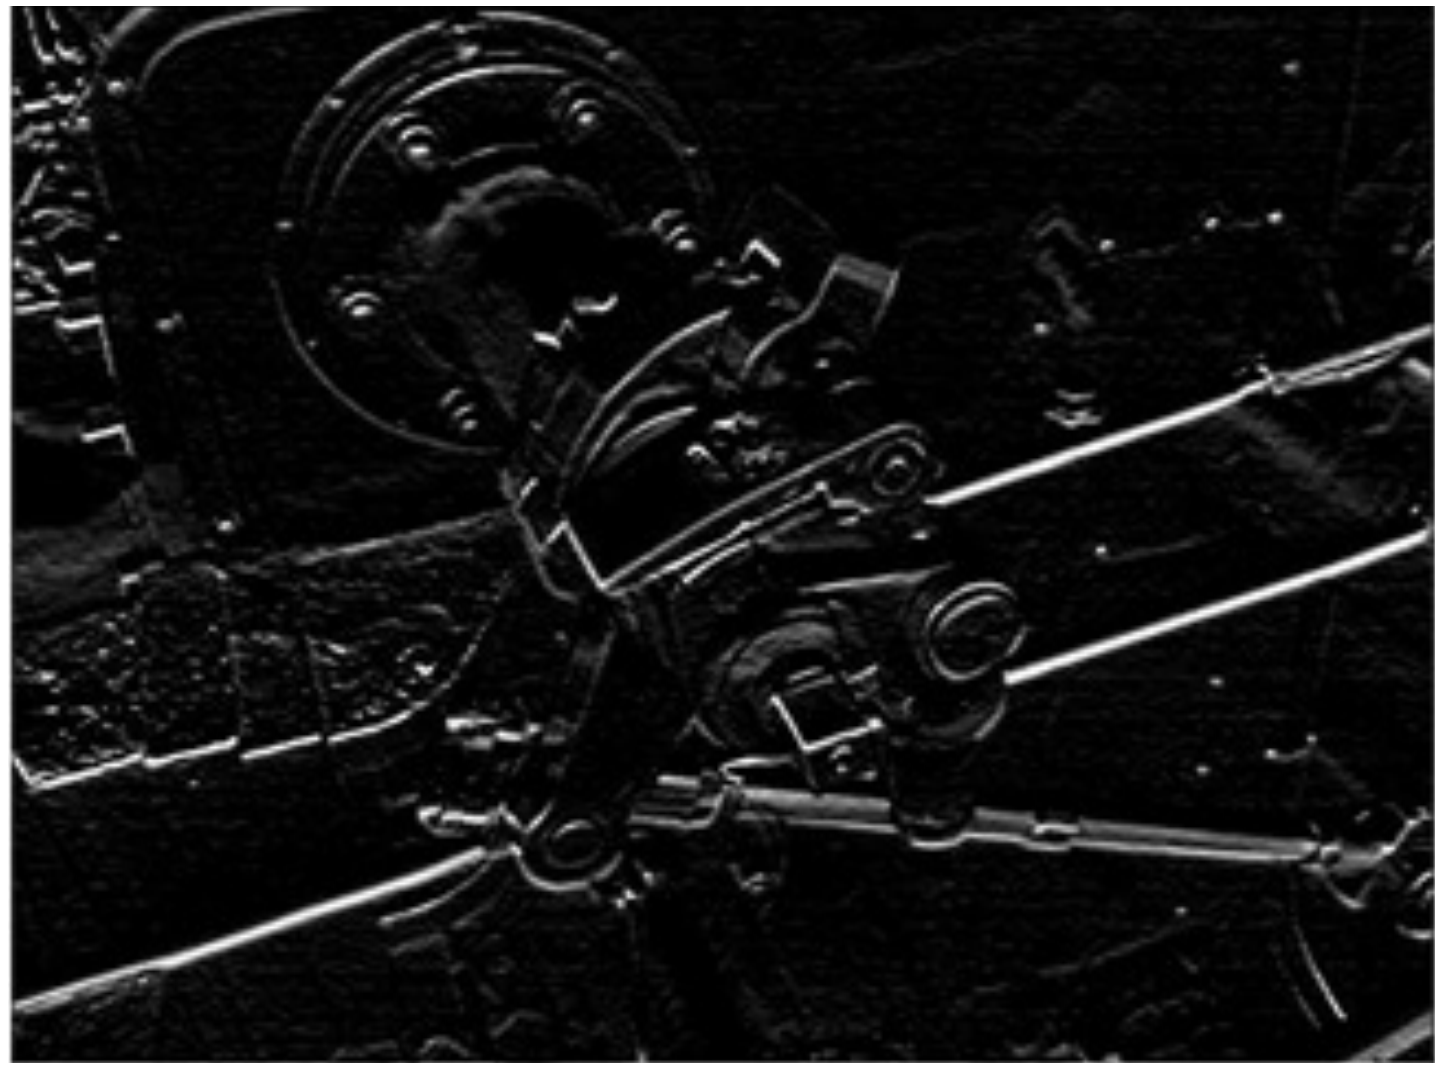

gradient amplitude

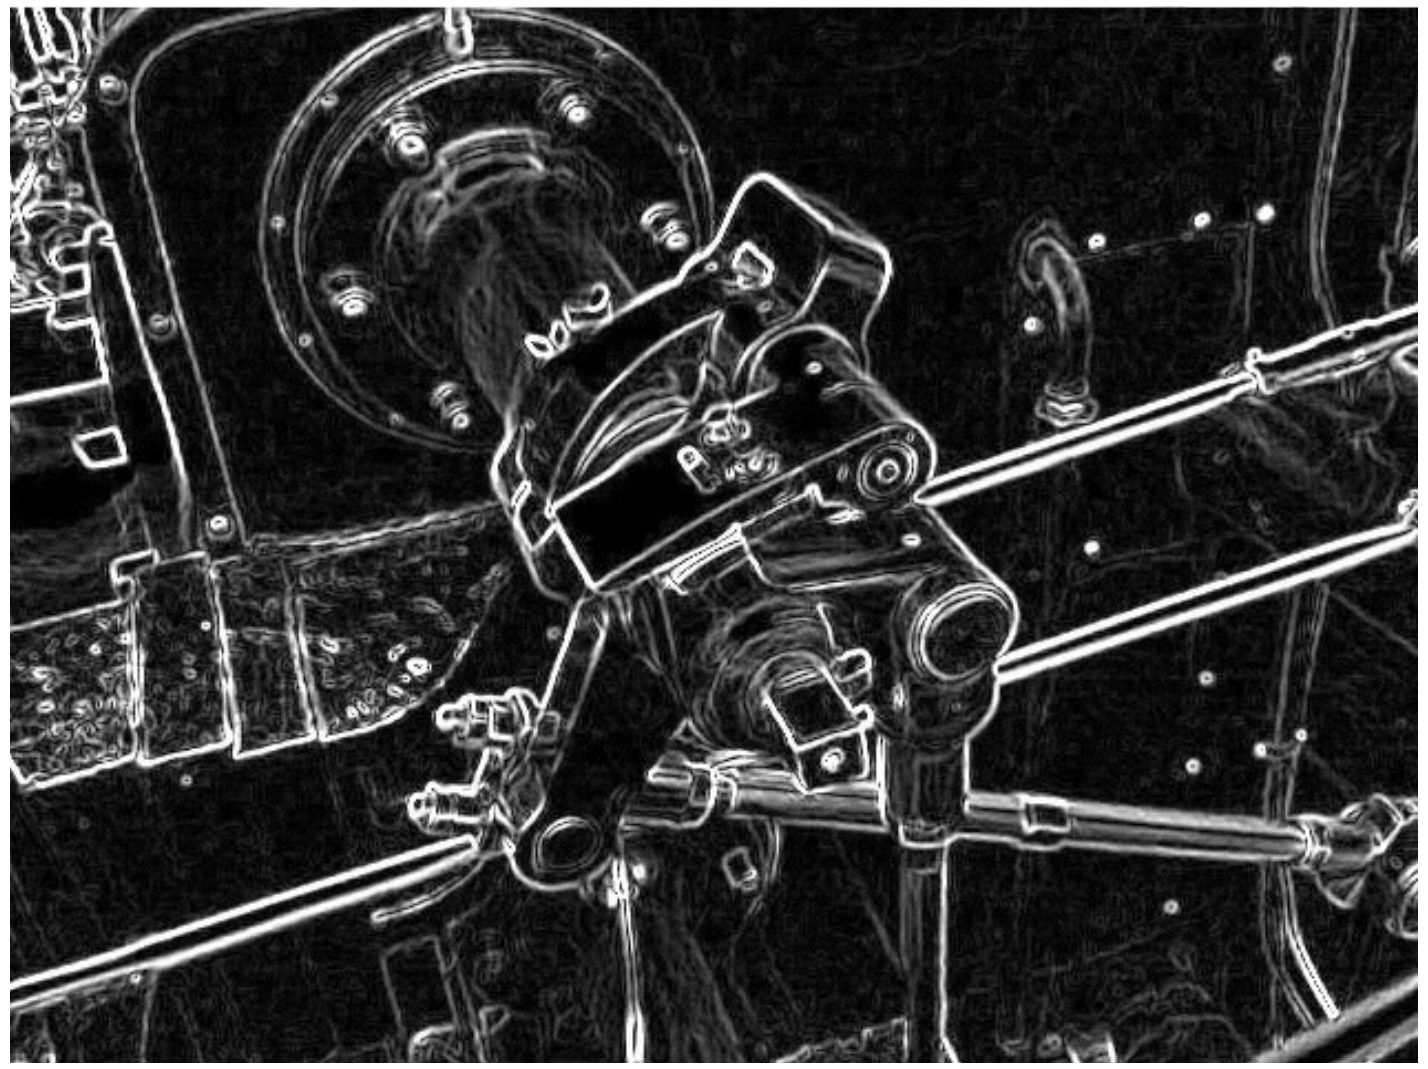

horizontal derivative

How does the gradient direction relate to these edges?

How do you find the edge of this signal?

intensity plot

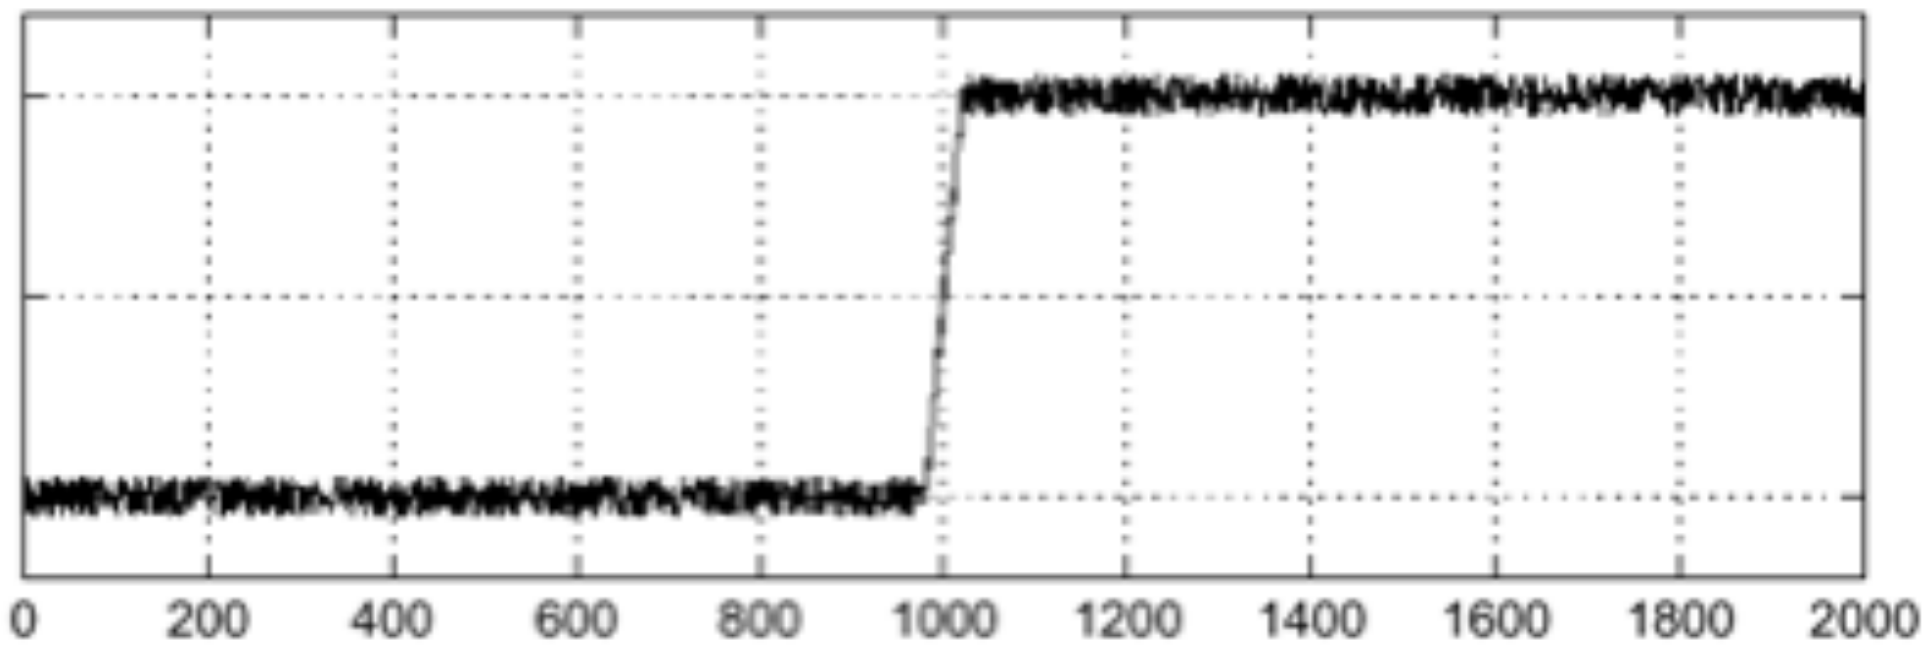

How do you find the edge of this signal?

intensity plot

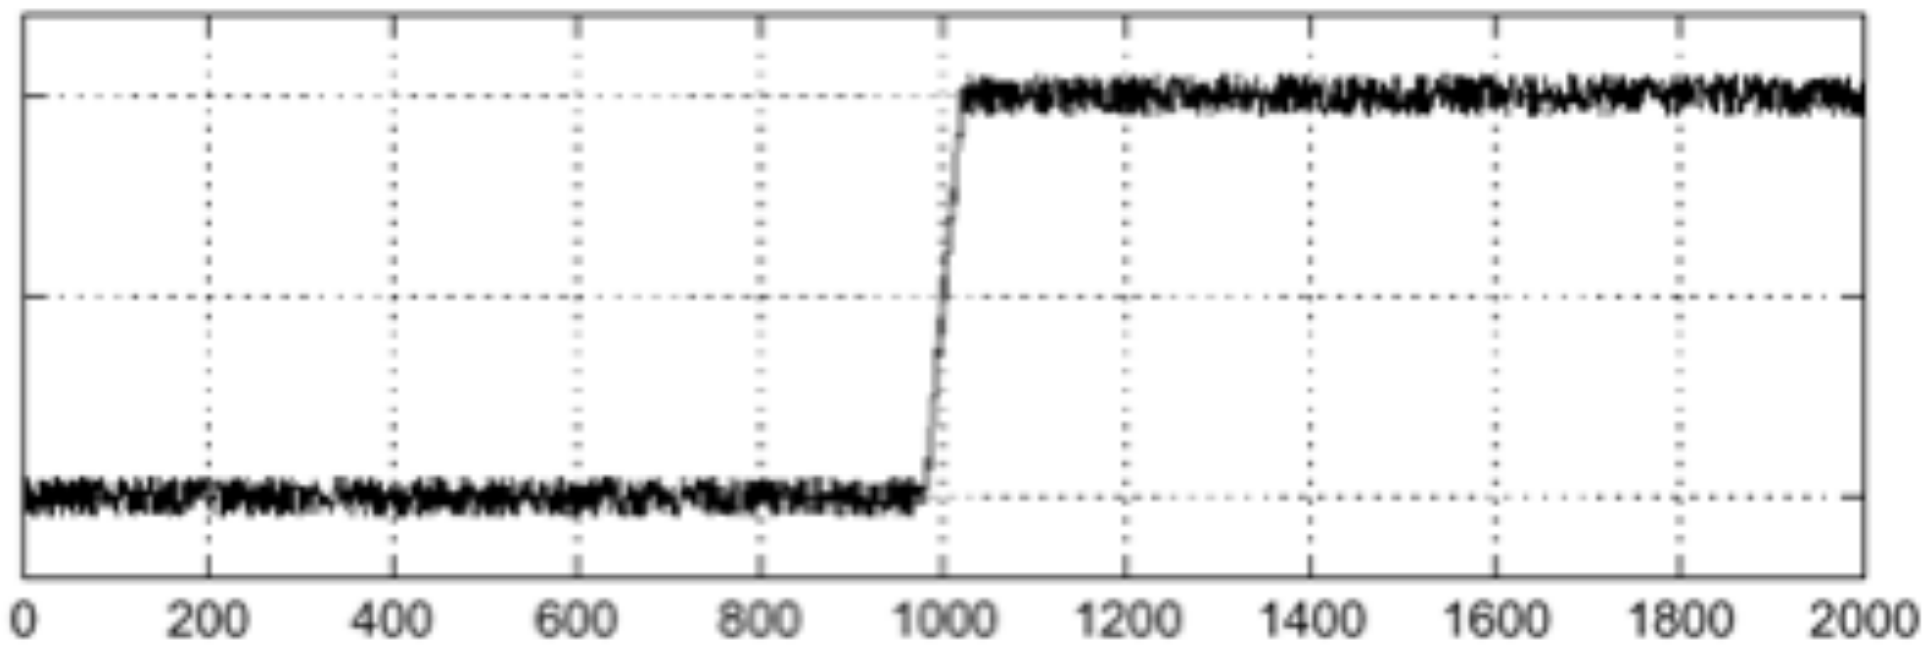

Using a derivative filter:

derivative plot

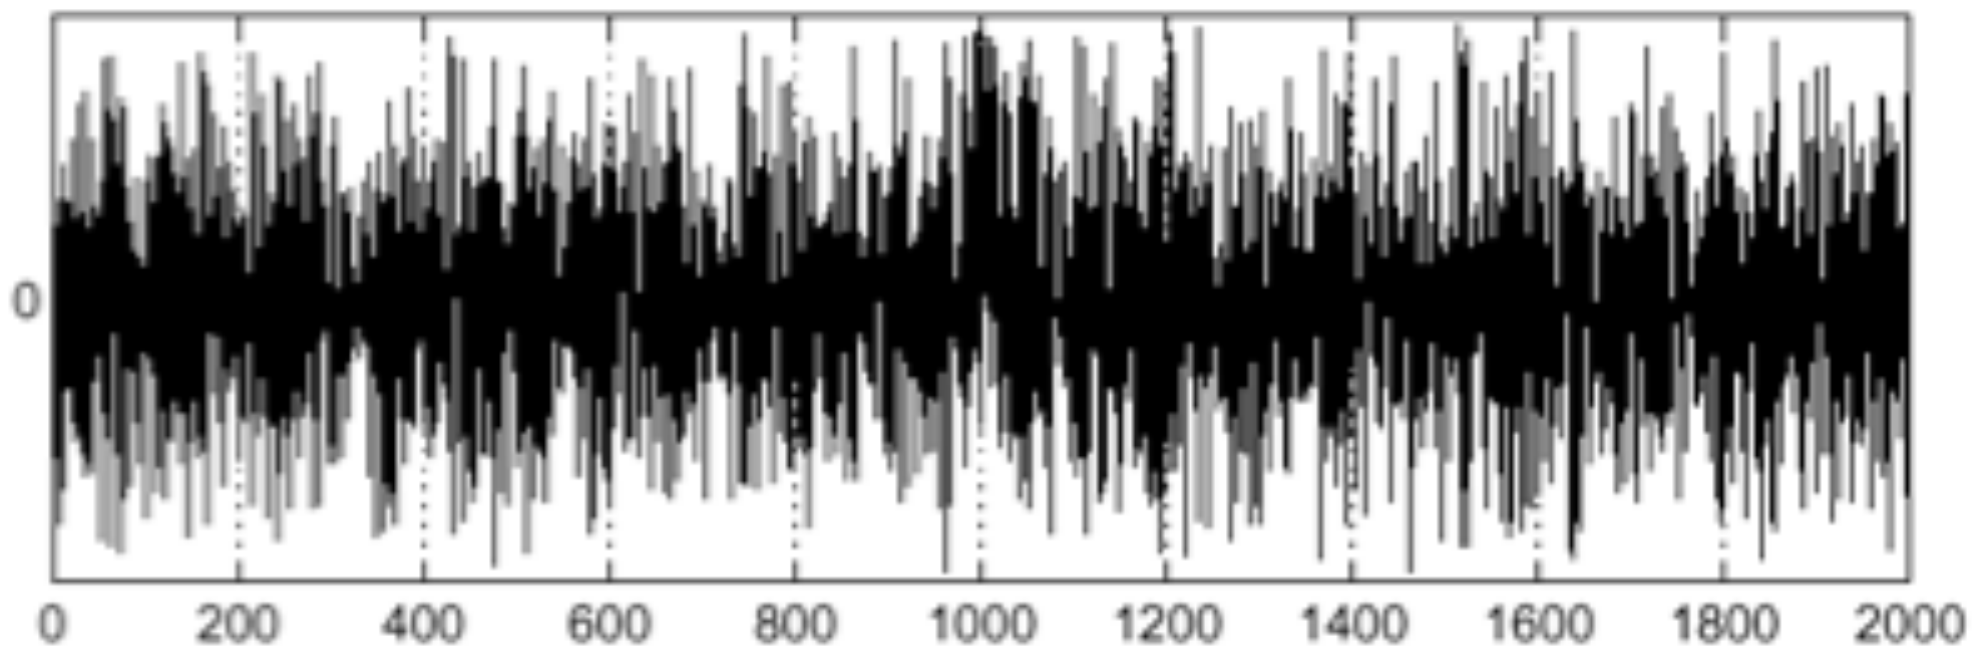

What's the problem here?

Differentiation is very sensitive to noise

When using derivative filters, it is critical to blur first!

input

Gaussian

blurred

derivative of
blurred

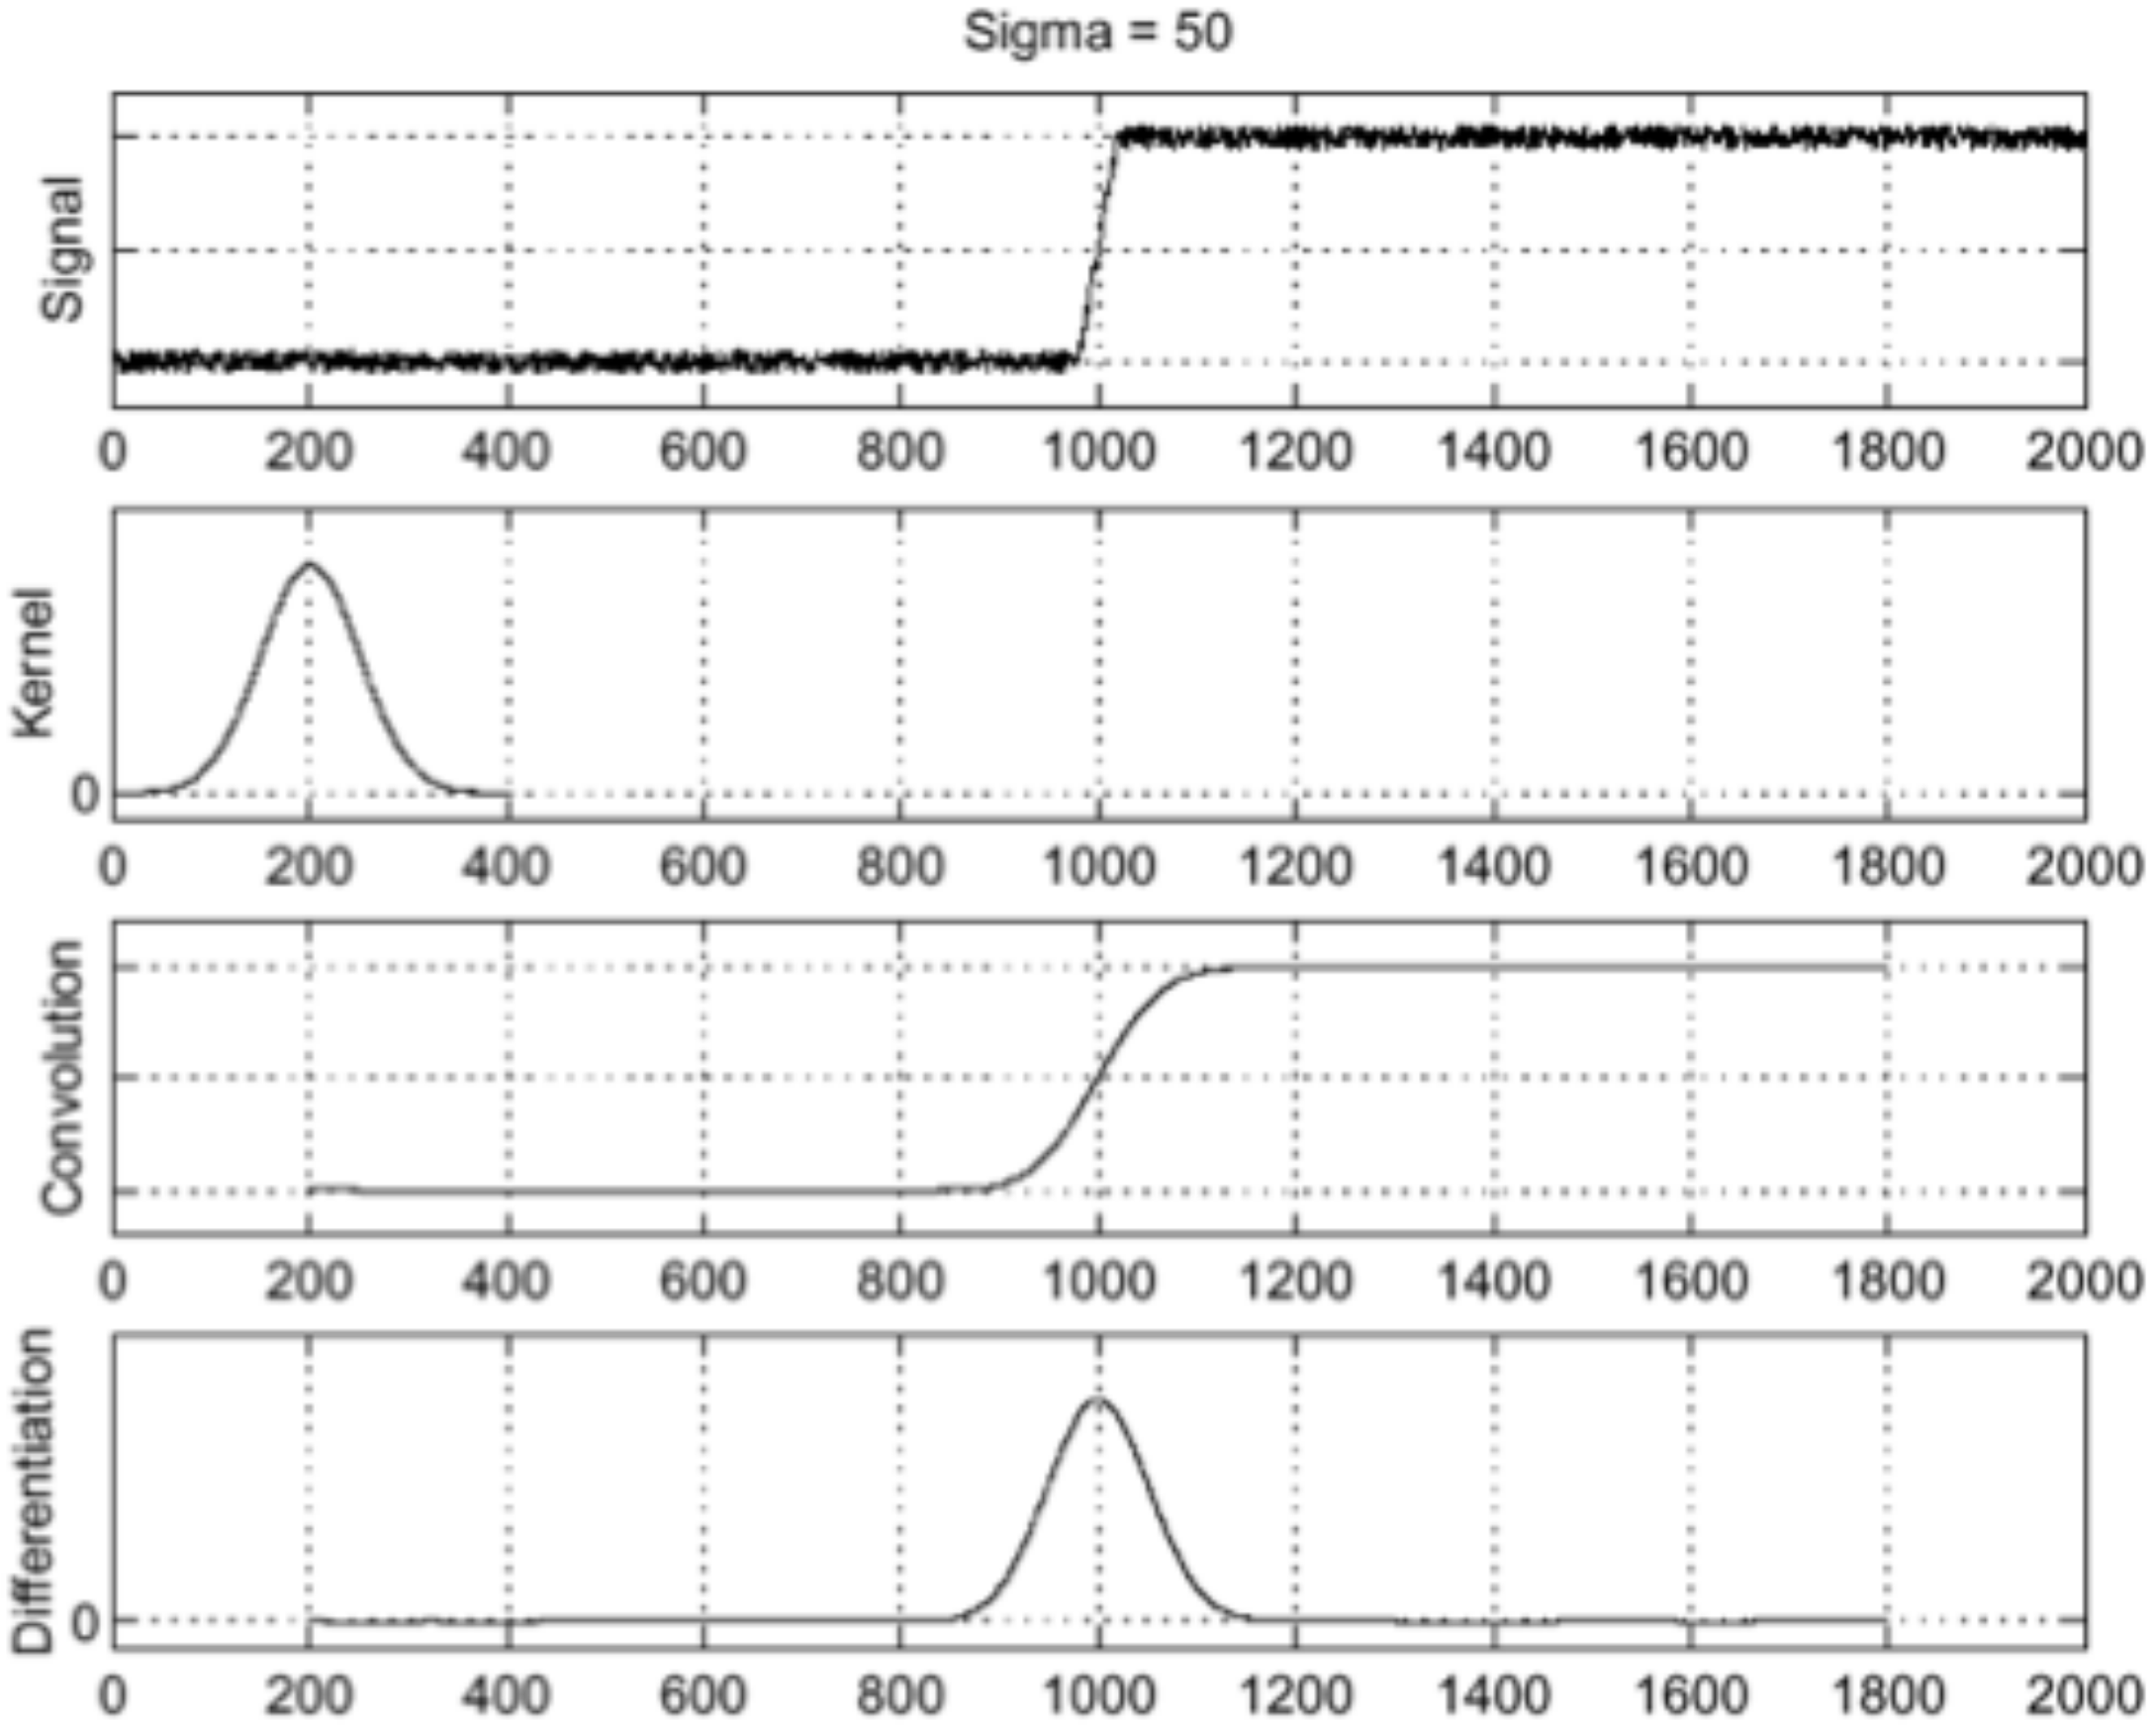

How much
should we blur?

Derivative of Gaussian (DoG) filter

Derivative theorem of convolution: $\frac{\partial}{\partial x}(h \star f) = (\frac{\partial}{\partial x} h) \star f$

input

derivative of Gaussian

output (same as before)

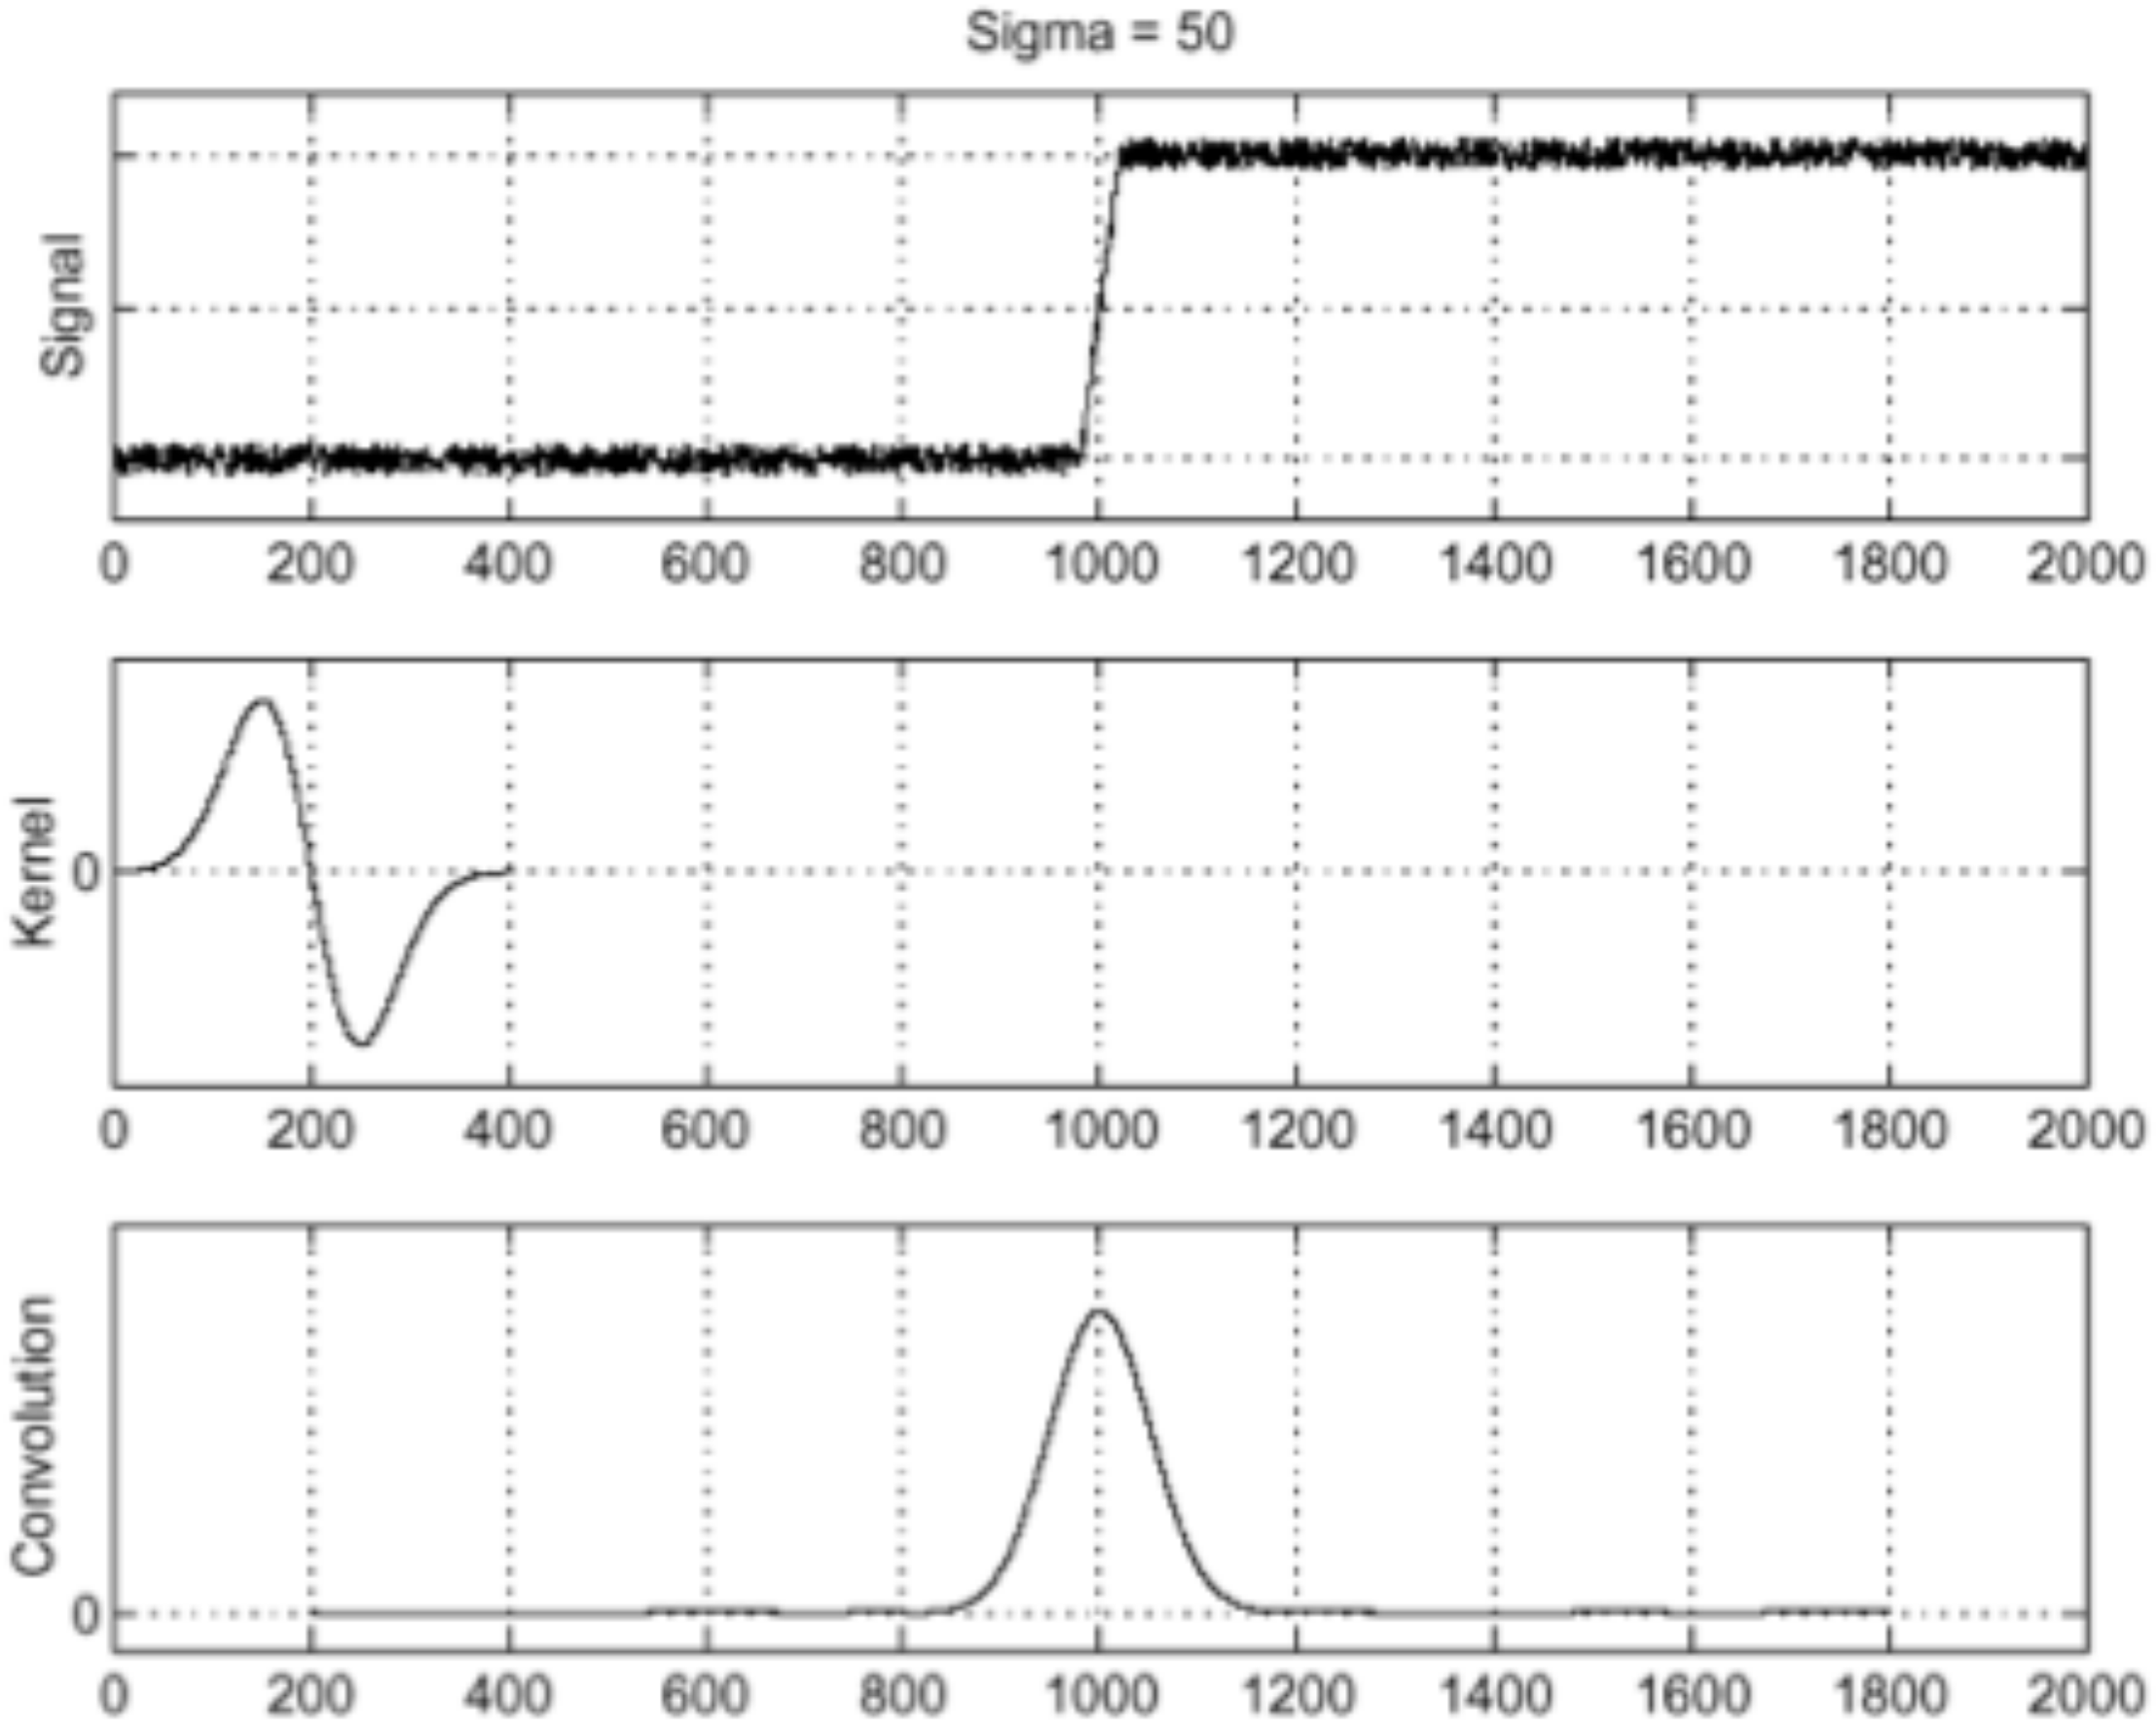

- How many operations did we save?
- Any other advantages beyond efficiency?

Laplace filter

Basically a second derivative filter.

- We can use finite differences to derive it, as with first derivative filter.

first-order finite difference

$$f'(x) = \lim_{h \to 0} \frac{f(x + 0.5h) - f(x - 0.5h)}{h} \longrightarrow$$

1D derivative filter

1	0	-1

second-order finite difference

$$f''(x) = \lim_{h \to 0} \frac{f(x + h) - 2f(x) + f(x - h)}{h^2} \longrightarrow$$

Laplace filter

?

Laplace filter

Basically a second derivative filter.

- We can use finite differences to derive it, as with first derivative filter.

first-order finite difference

$$f'(x) = \lim_{h \to 0} \frac{f(x + 0.5h) - f(x - 0.5h)}{h} \longrightarrow$$

1D derivative filter

1	0	-1

second-order finite difference

$$f''(x) = \lim_{h \to 0} \frac{f(x + h) - 2f(x) + f(x - h)}{h^2} \longrightarrow$$

Laplace filter

1	-2	1

Laplacian of Gaussian (LoG) filter

As with derivative, we can combine Laplace filtering with Gaussian filtering

input

Laplacian of Gaussian

output

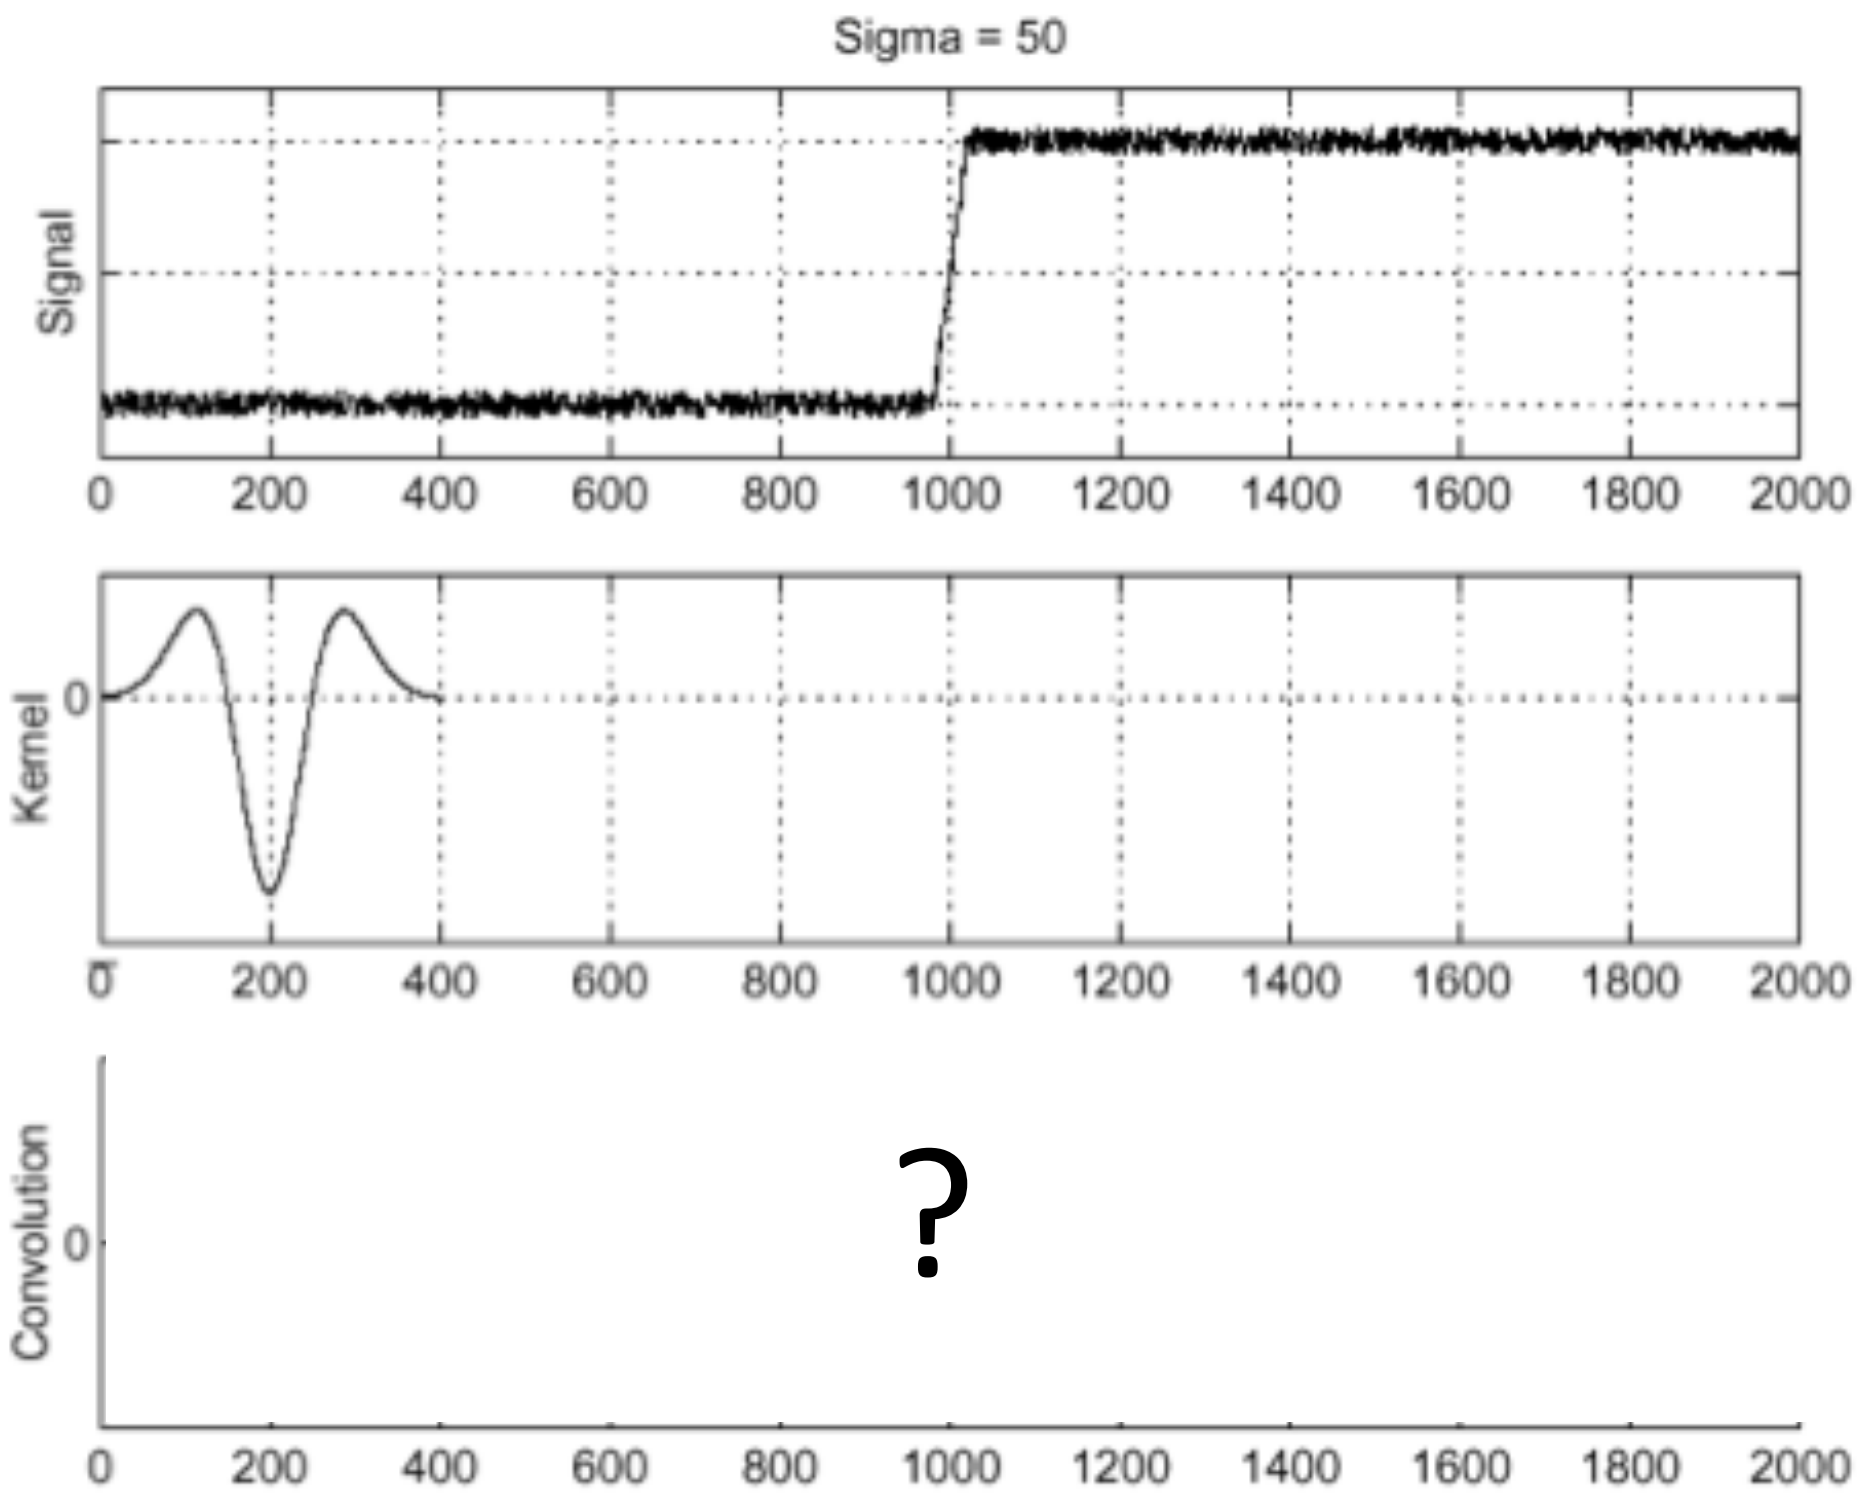

Laplacian of Gaussian (LoG) filter

As with derivative, we can combine Laplace filtering with Gaussian filtering

input

Laplacian of Gaussian

output

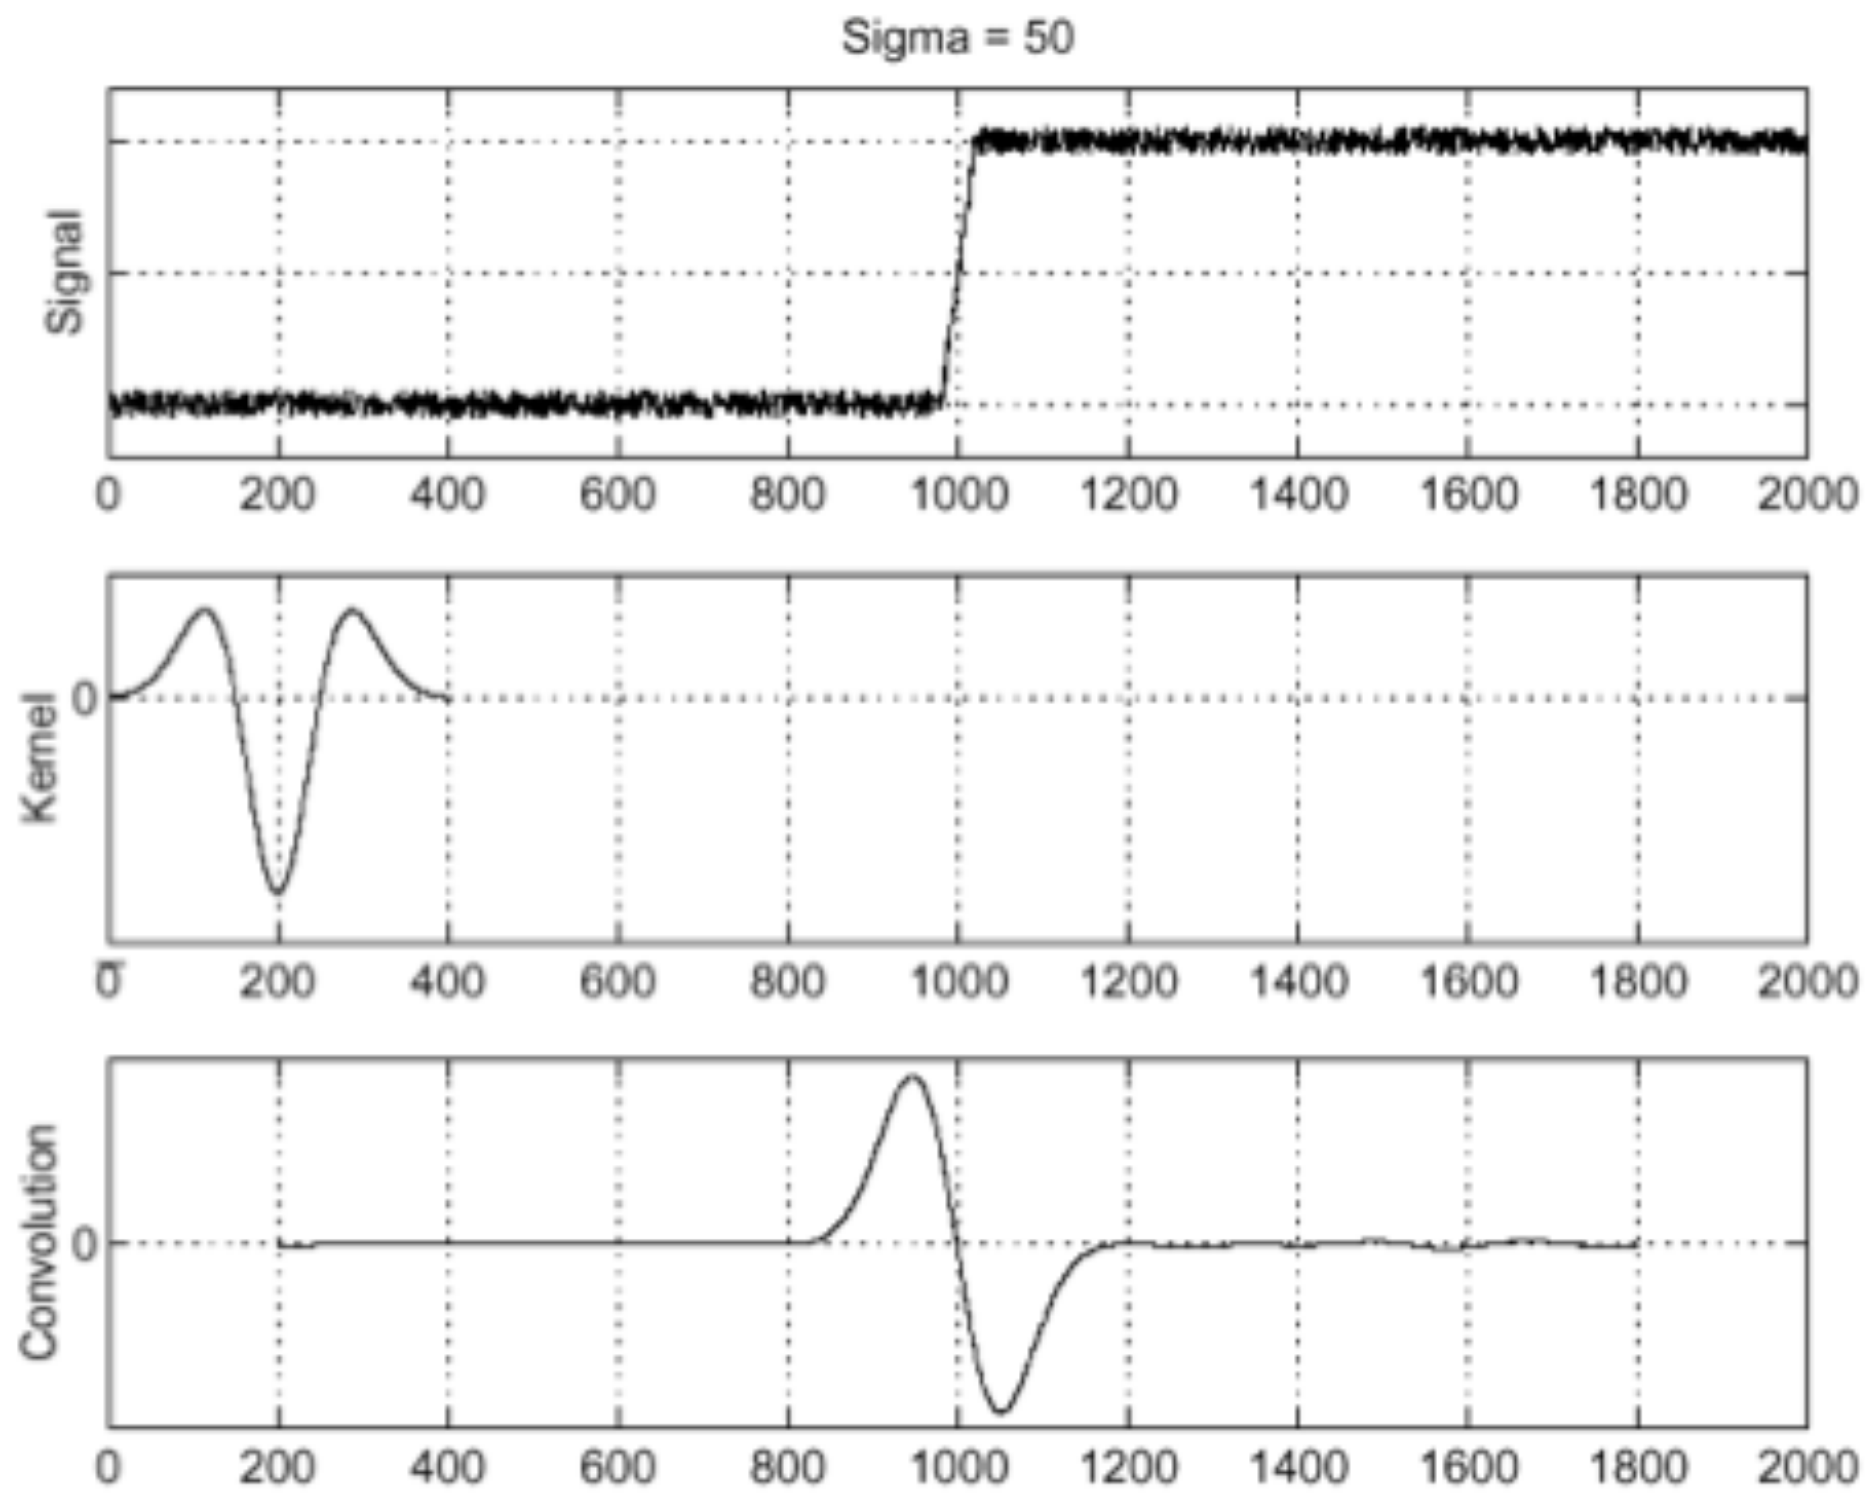

"zero crossings" at edges

Laplace and LoG filtering examples

Laplacian of Gaussian filtering

Laplace filtering

Laplacian of Gaussian vs Derivative of Gaussian

Laplacian of Gaussian filtering

Derivative of Gaussian filtering

Laplacian of Gaussian vs Derivative of Gaussian

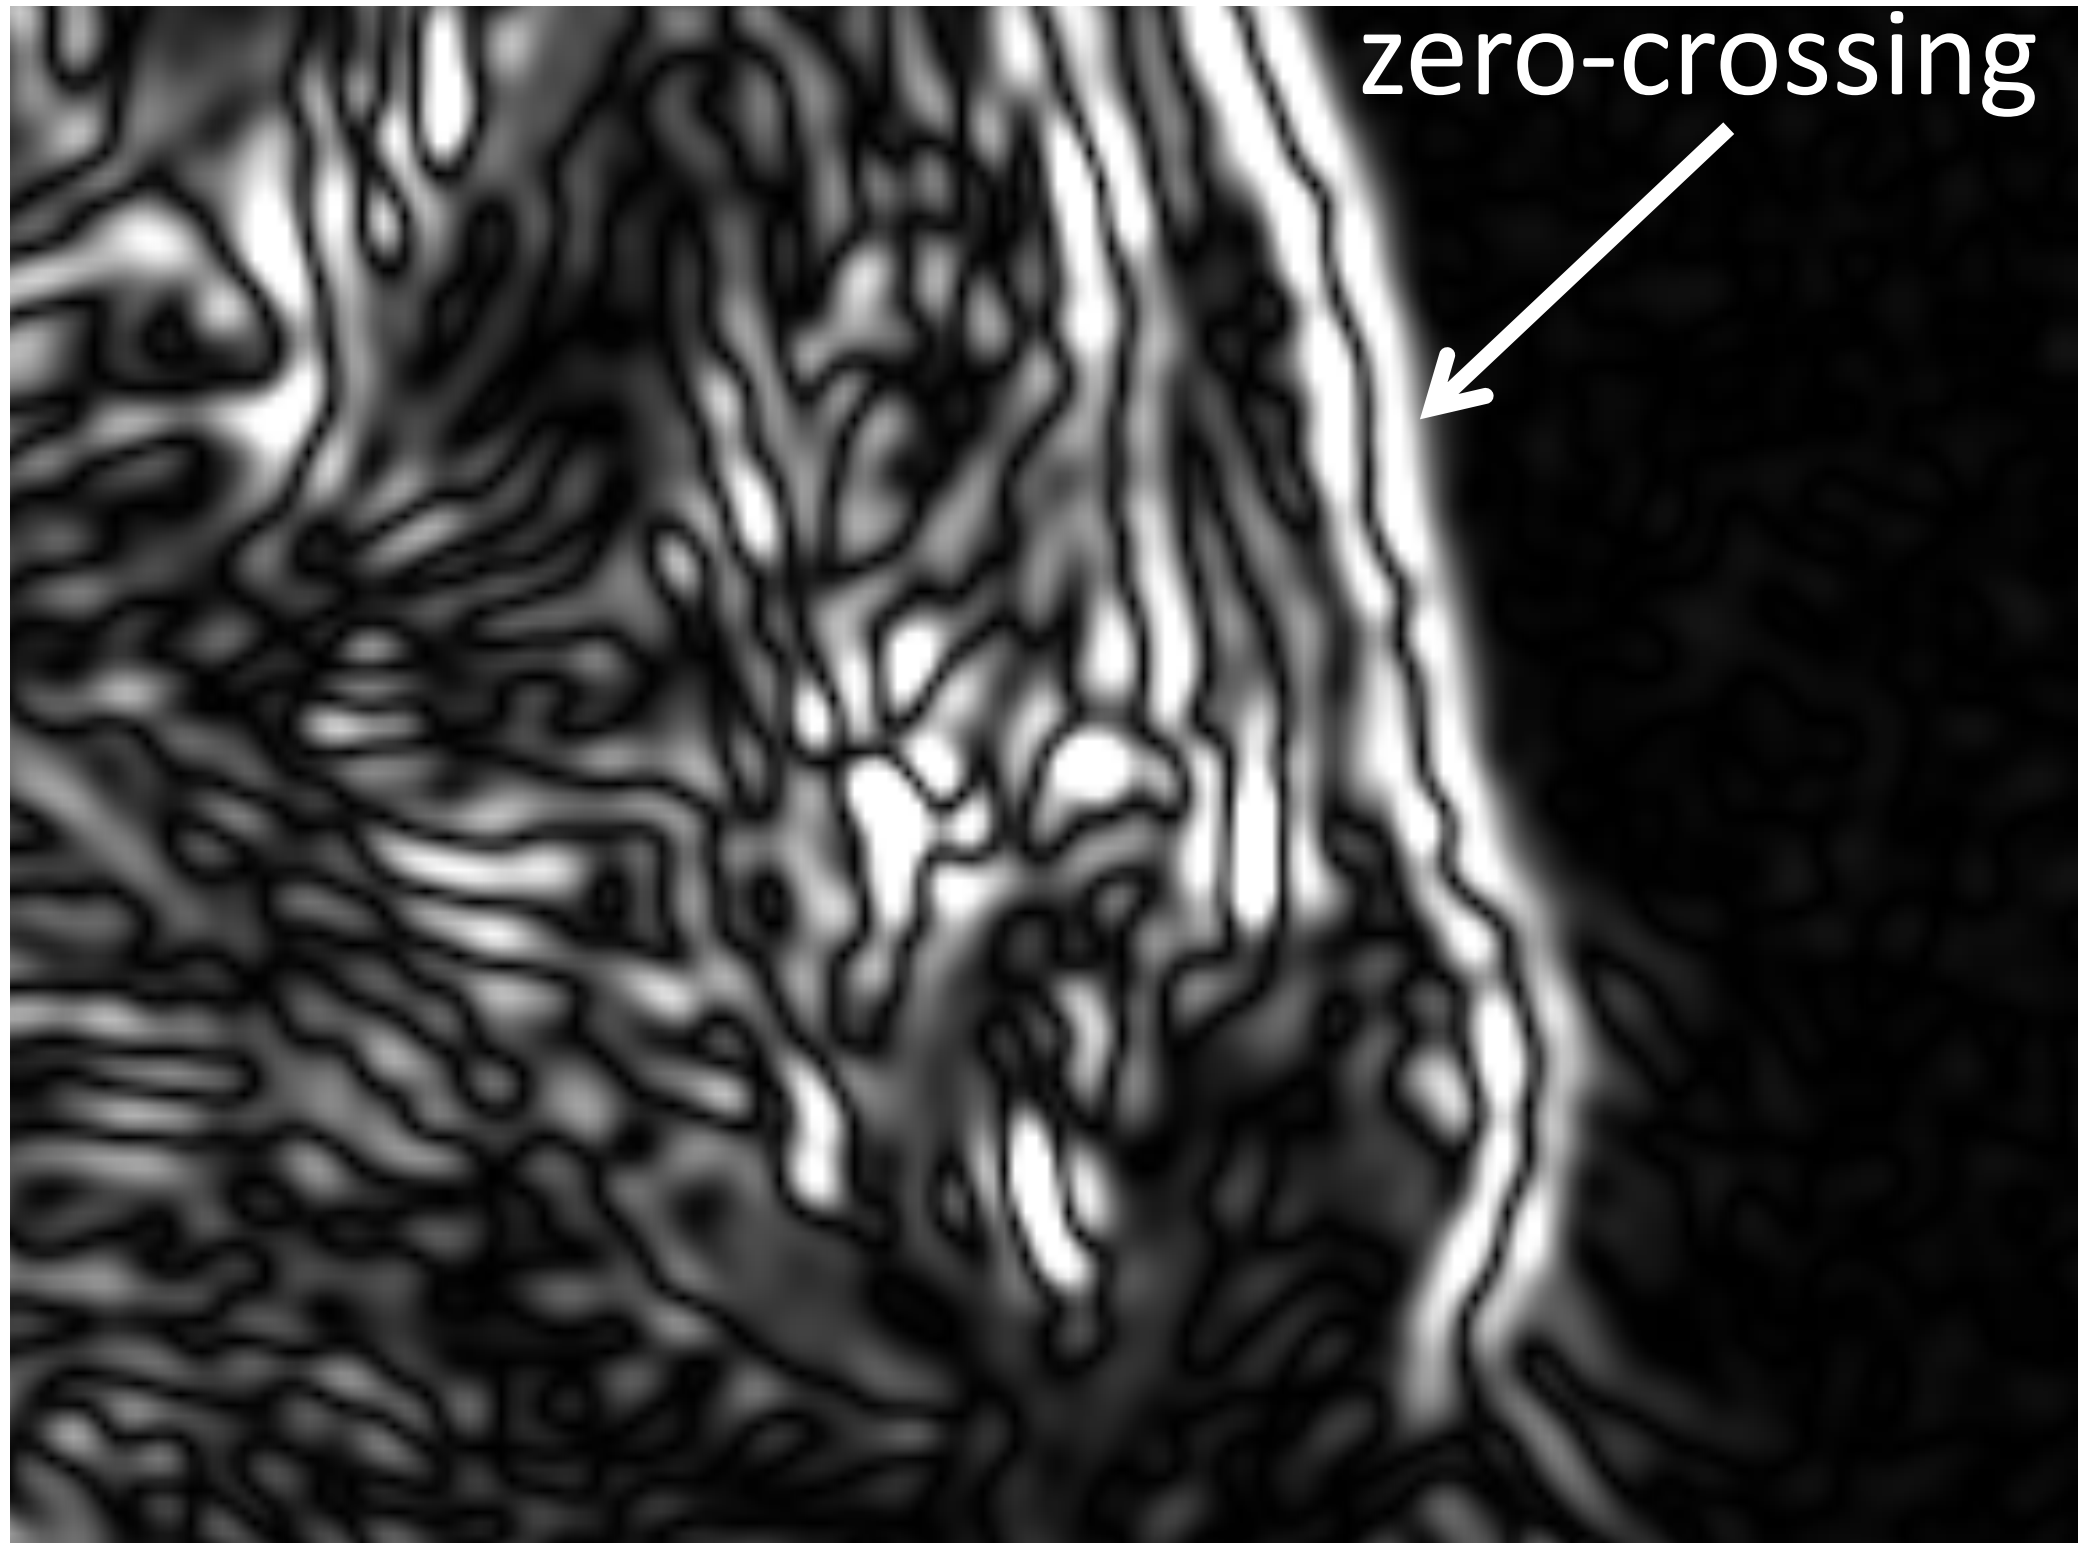

Laplacian of Gaussian filtering

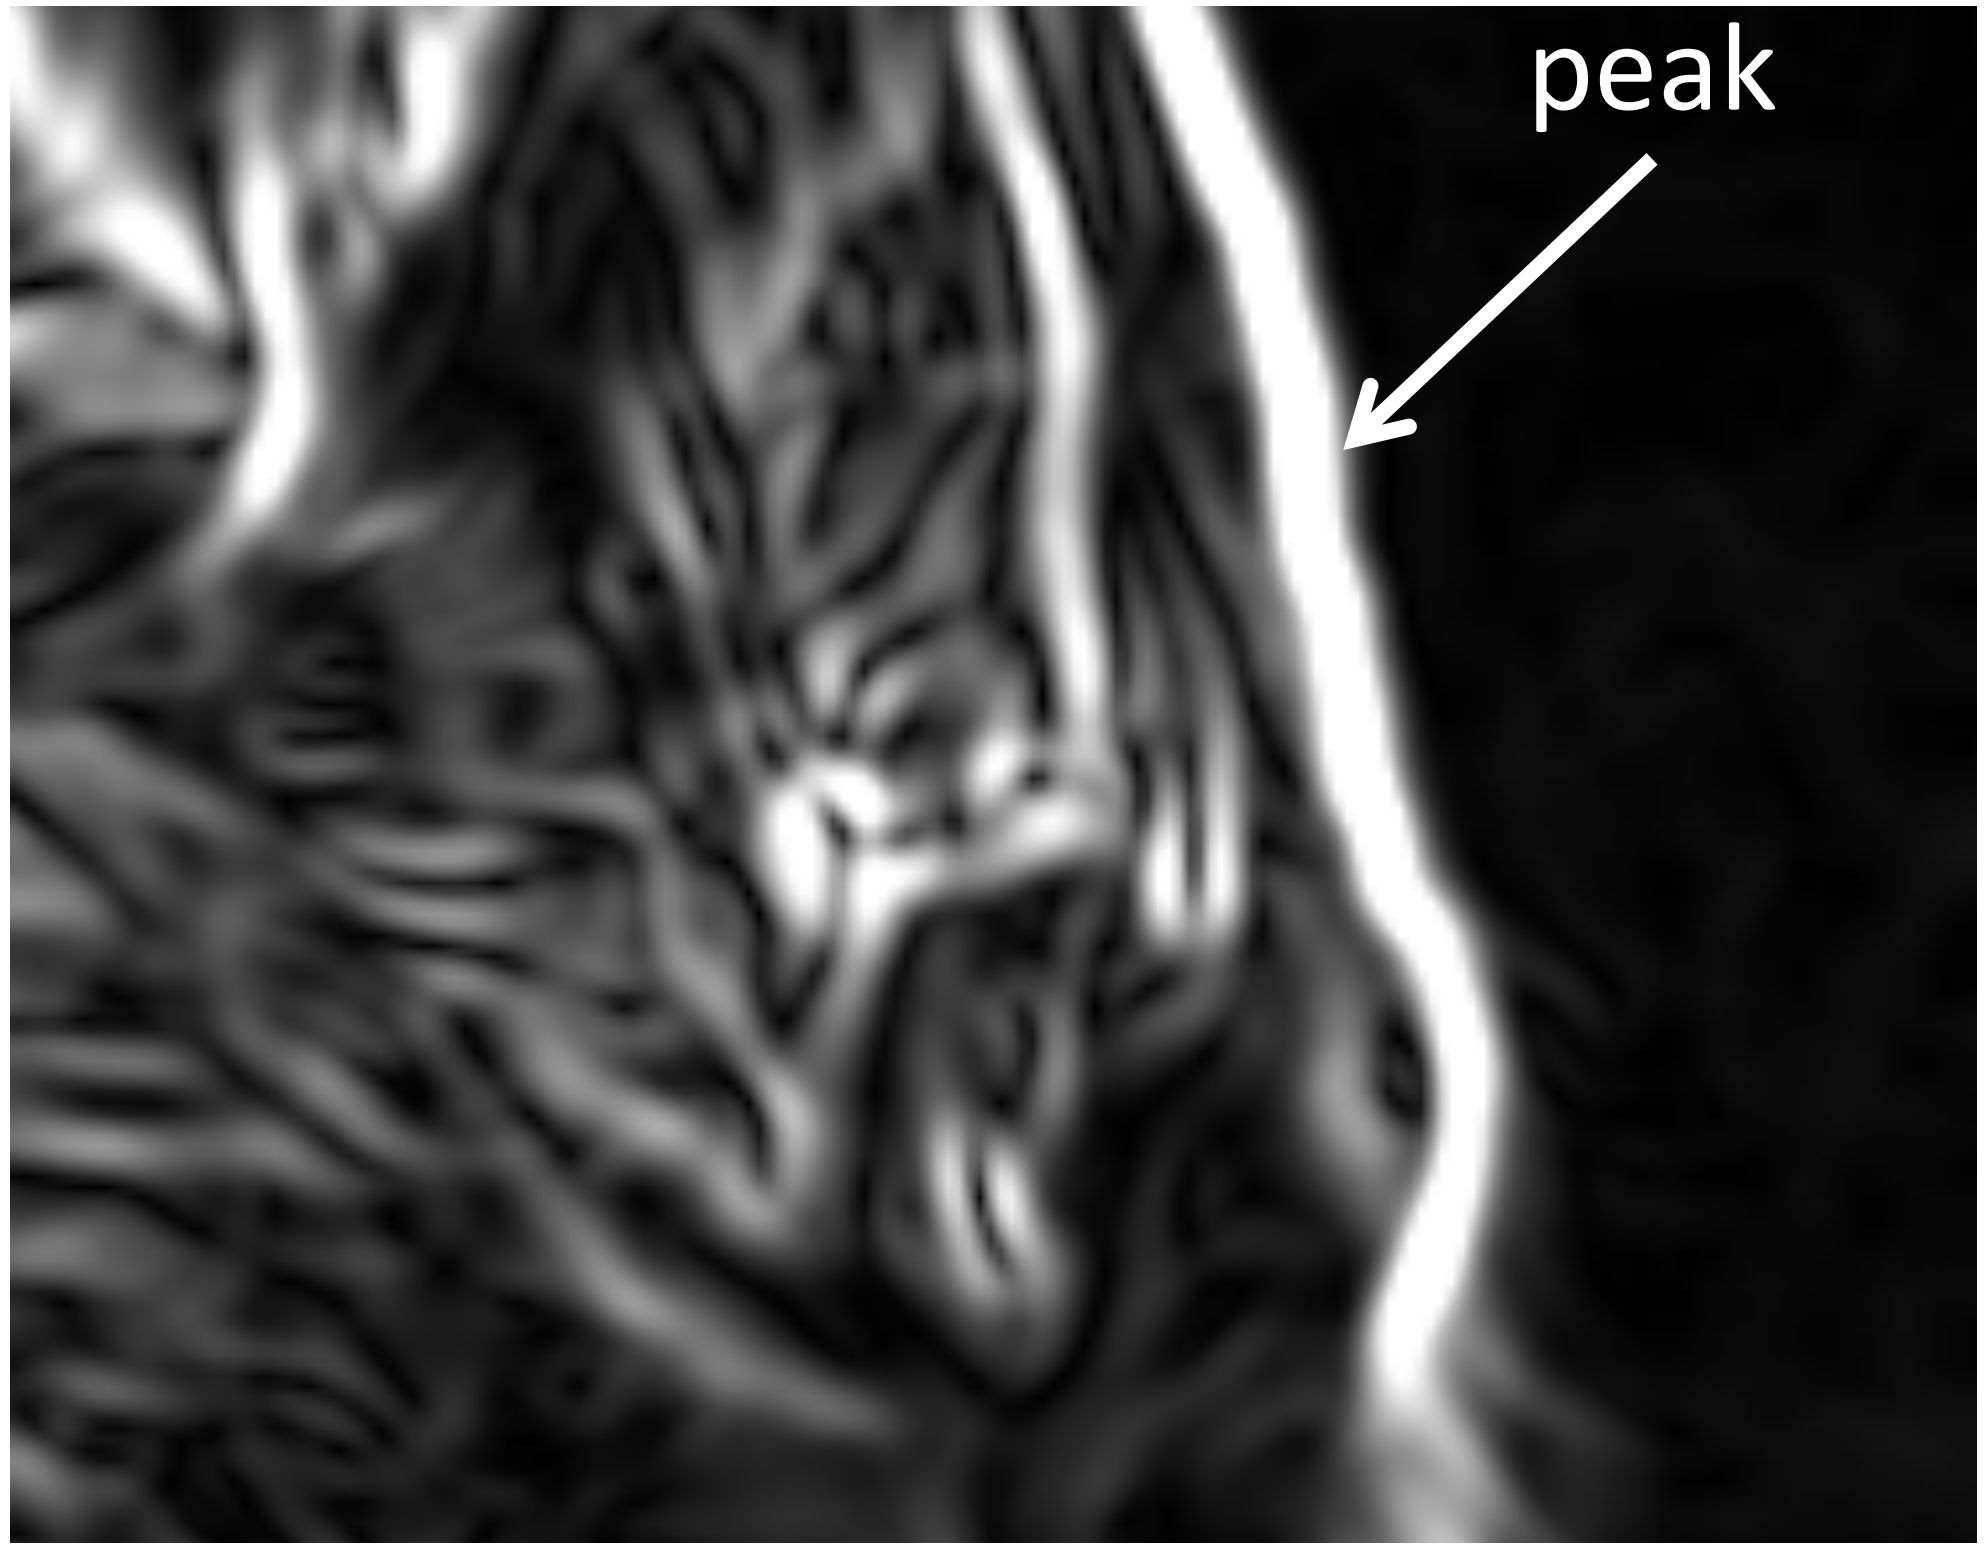

Derivative of Gaussian filtering

Zero crossings are more accurate at localizing edges (but not very convenient).

2D Gaussian filters

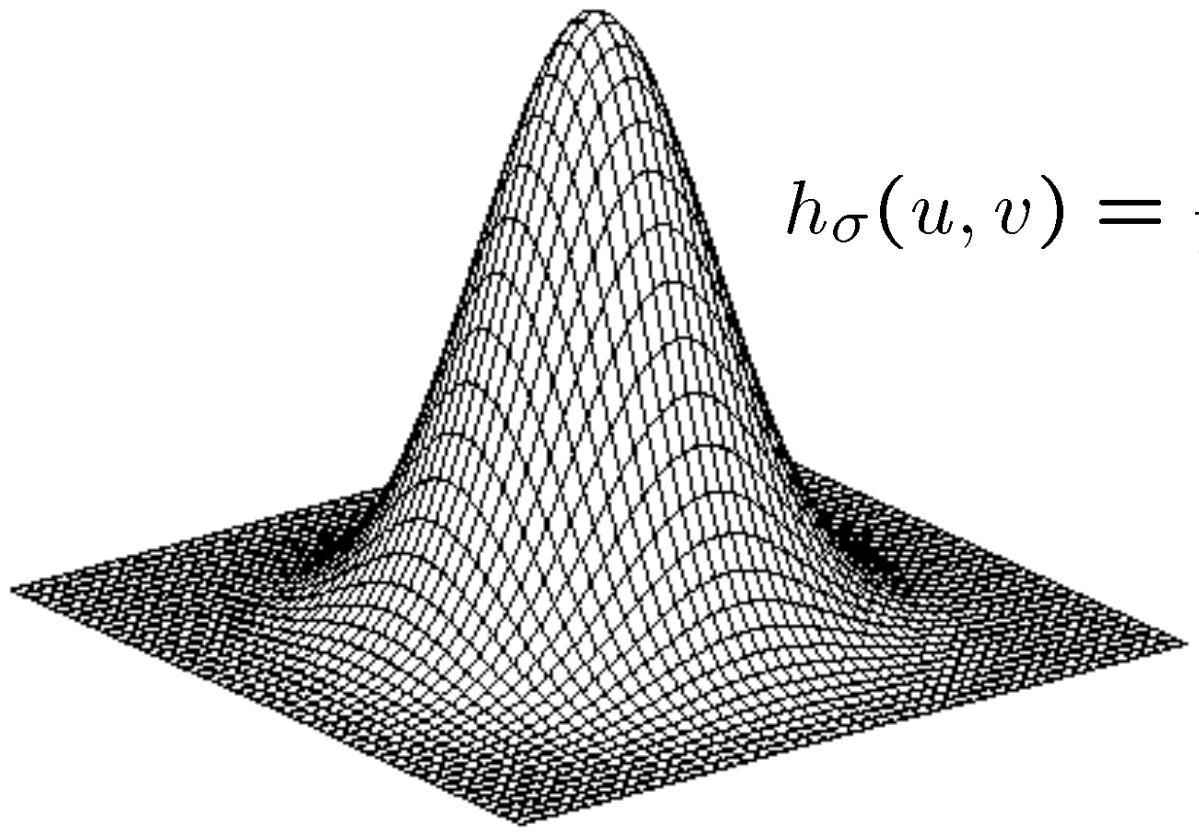

$$h_\sigma(u,v) = \frac{1}{2\pi\sigma^2} e^{-\frac{u^2+v^2}{2\sigma^2}}$$

Gaussian

$$\frac{\partial}{\partial x} h_\sigma(u,v)$$

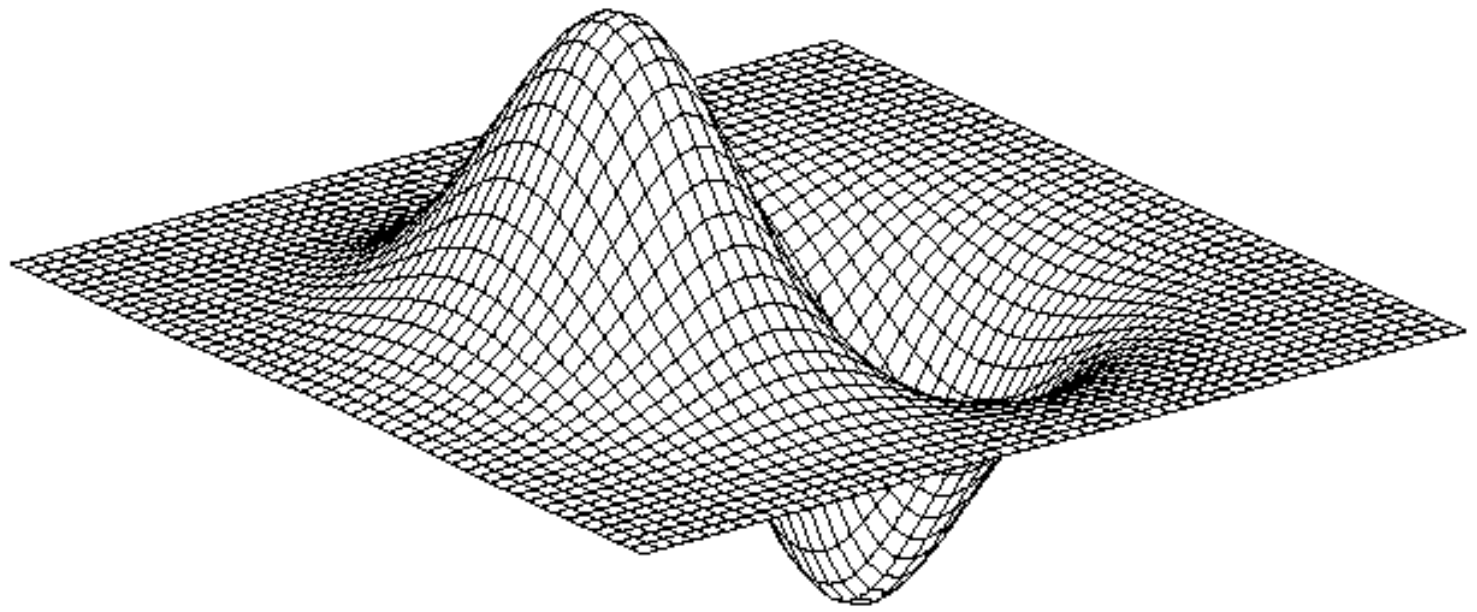

Derivative of Gaussian

$$\nabla^2 h_\sigma(u,v)$$

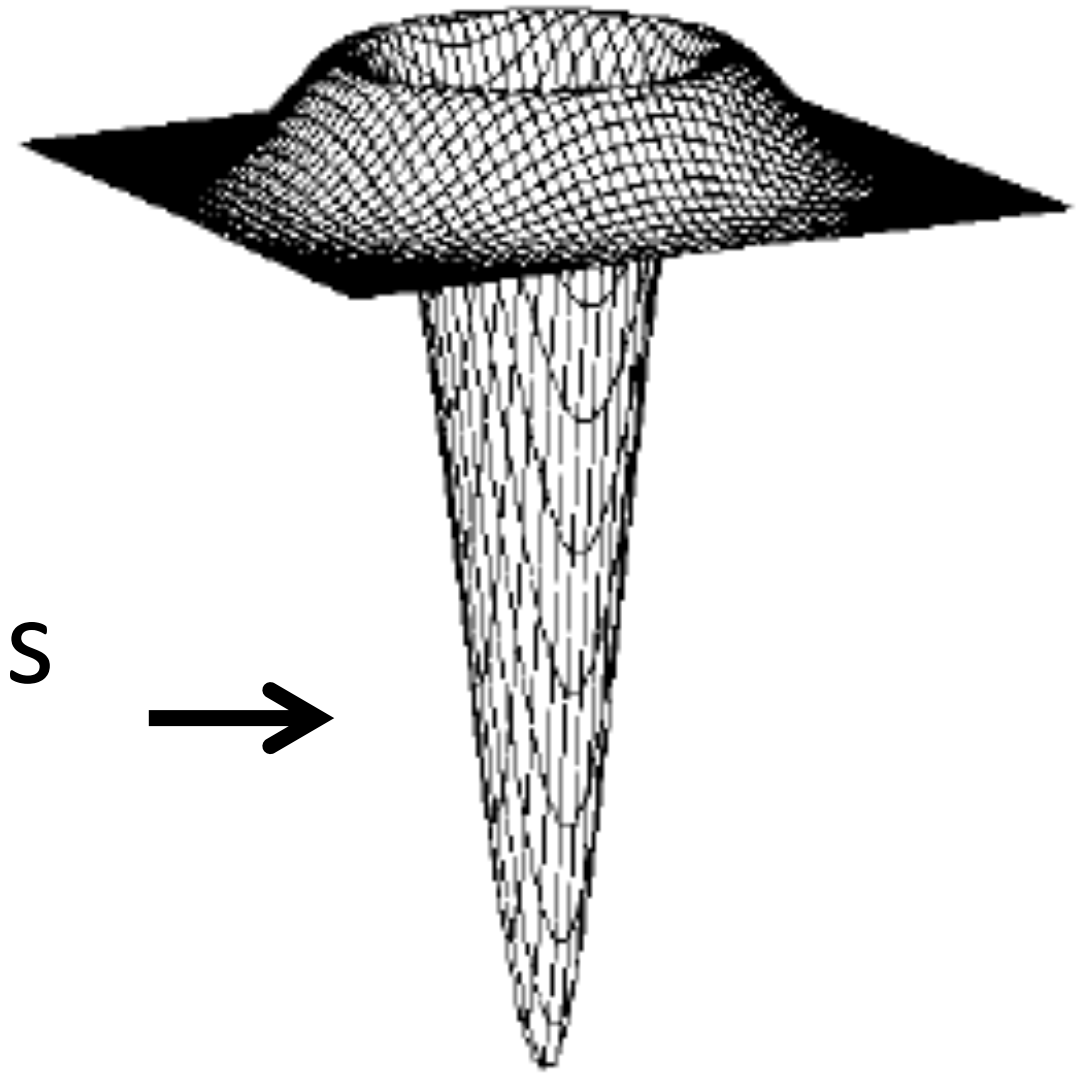

how does this relate to this lecture's cover picture? →

Laplacian of Gaussian